


Flex Led Neon Light

N0612T-FCFS



Product Specification

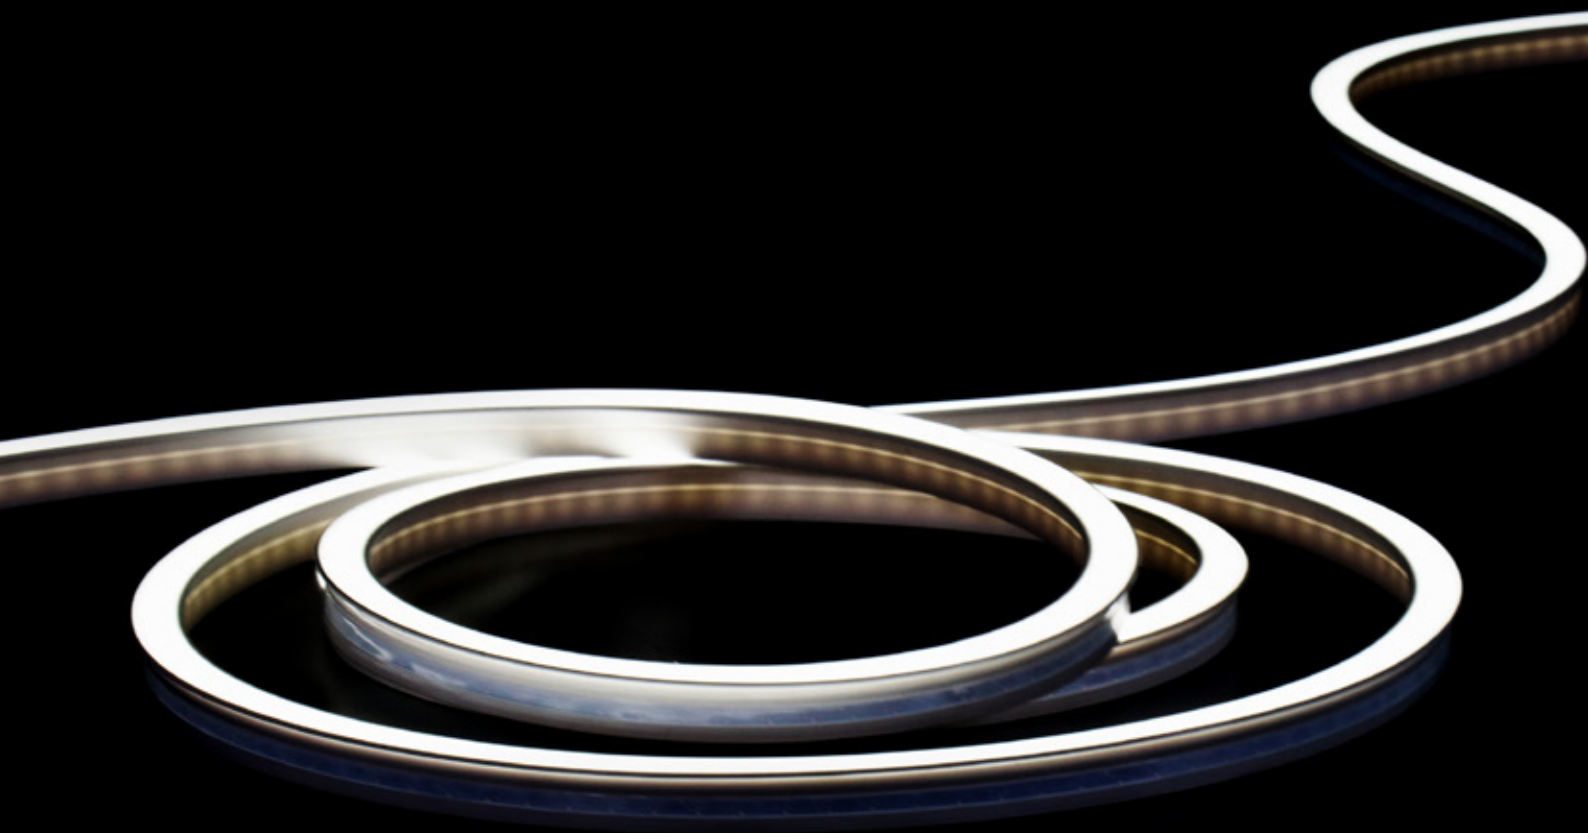

LED strip colloid specifications comparison

Materials Main parameters	Silicone flexible led strip	PVC flexible led strip	Notes
Colloid features in -40℃	No crack after 30 days	Totally cracked	The low temperature resistant of silicone is superior than PVC or epoxy materials
Colloid features in 120℃	No obvious change after 72 hours	Colloid changed into yellow and deformed after 2 hours	The high temperature resistant of silicone is superior than PVC or epoxy
Colloid features in 180℃	No obvious change after 72 hours	Colloid changed into brown and some melted after 20 minutes	Over 150℃ , PVC is easily hydrolyzed, Viscosity becomes weaken and easily seperated
Steadily lighted in Seawater for 72 hours	No obvious change	Serious atomization on the surface	The waterproof grade of silicone led strip can reach to IP67, high resistance to acidic alkali and salt properties
Thermal conductivity	Good thermal conductivity	No thermal conductivity	Pvc and epoxy cannot conduct heat, while silicone has good thermal conductivity

Product features


- Anti-yellowing and heat resisting silicone glue, chemical resistance acid and alkaline,available for extremely terrible outdoor environment.
- Uniform and soft luminance, no light spot.
- Super brightness large chip, golden wire welded and copper led holder for quicker heat dissipation, higher stability, longer life span.
- Leadless SMT technique (RoHS certificated), smooth welding joint, firm connection of led and pcb.



Specification



Bending (Silicone)

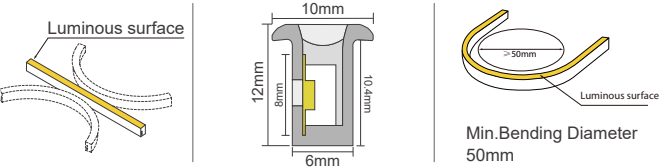

IP20
Protection



Flame
Resistant



UV
Resistant



Solvents
Resistant



Saltwater
Resistant



Dirt
Resistant



CRI90



3 Years
Warranty



Ambient
Working



Anti
Yellowing


Model Number	N0612T-FCFS	Size (mm)	6*12
PCB Limited (mm)	8mm	IP Grade	IP20
Working Temperature	-25 to 60°C	N.W.(G/M)	130g

N0612T FCFS-Accessories




Solderless Power Cable
(2m, L813 Male, Direct Plug-in Design)

Driver & Cotronller




Model: SUR-24024-CP-D

- 24V / 24W max
- Ultra-thin design
- Compatible with L813 connector
- Supports up to 4 outputs
- With short circuit & overload protection




Model: SUR-24036-CP-D

- 24V / 36W max
- Constant voltage mode output;
- Voltage range (100-240VAC)
- Protection class II
- 6 outputs and 1 sensor connector
- 20000 hours Life span



Model: SUR-24060-CP-D

- 24V / 60W max
- Ultra-thin design (18mm height)
- High current output 2.5A
- Compatible with L813 connector
- 6 outputs + 1 sensor port
- With short circuit & overload protection



Model: SUR-24100-CP-D


- 24V / 100W max
- Ultra-thin design (19mm height)
- High current output 4.2A
- 9 outputs + 1 sensor port
- Compatible with L813 connector
- Imported IC, long-life capacitor design
- With short circuit, over-current &

Recommend LED strip parameters

(1) N0612T-FCFS WHT

SMD2216, 140LED/meter									
Part number	Color	Lumen/M CRI 80	Lumen/M CRI 90	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-2216FW140-24V	WW 	385	346	cut anywhere	1	140	24V	9.6W	5 meters from one end
	NW 	403	362						
	CW 	397	357						


Product system solutions

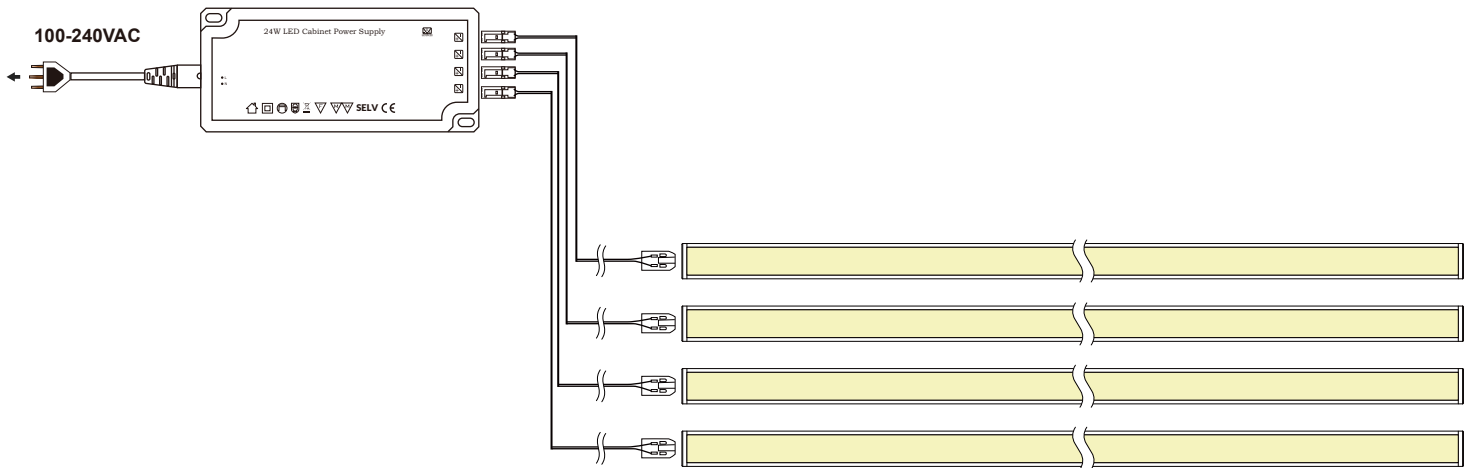

Cut mark



Free Cut Version: Cut Anywhere

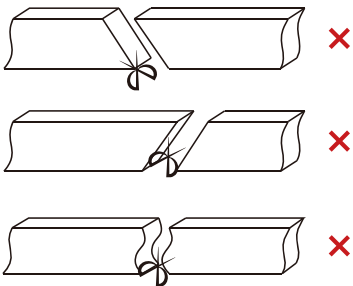


Please do not arbitrarily cut or cut into a bevel and arc section.

Installation



This product is suitable for embedded installation only.

Recommended slot size: Width 6mm, Depth 11–14mm. Gently press the neon sleeve into the slot.

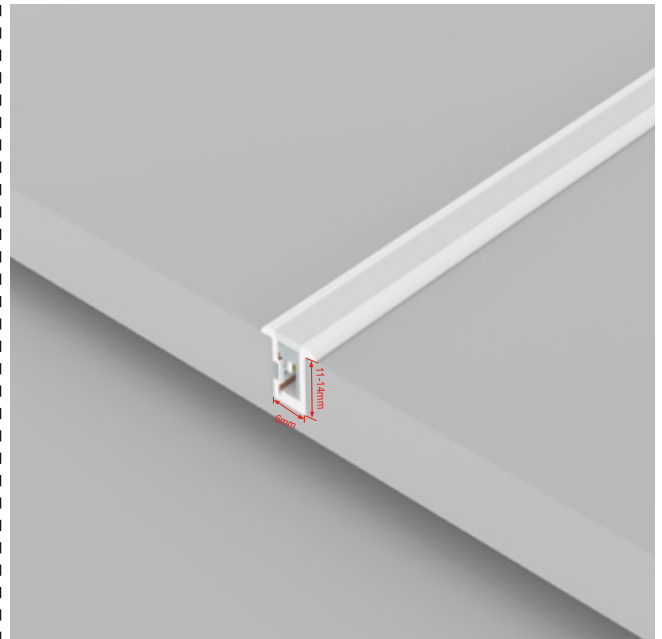

Installation of carrier



1. When installing the LED strip, install it from both ends at the same time, installation from one direction is prohibited.

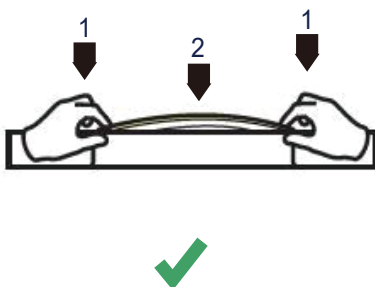


⚠ If the length of LED strip is over 2m, it is recommended to install by two persons.



2. Use tool to disassemble carefully, and do not pull the LED strip directly.

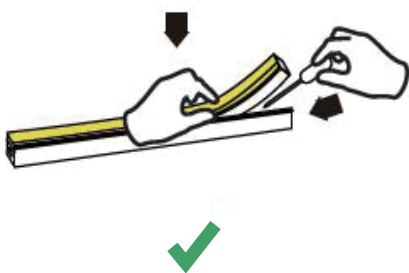


⚠ If the length of LED strip is over 2m, it is recommended to disassemble by two persons.

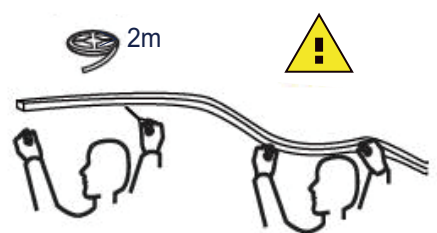


Cautions

- Please notice that the strips are not bendable to all directions. As the appropriate specific shape and degree, please follow the following instruction.
- LED strips are low voltage products, you must use the power supply (transformer). Please don't connect the led strip directly to the AC 110V or AC 220V. Otherwise, it will burn out the LED strips and lead to safety (security) accidents.
- Please read the specifications thoroughly before installation by professional staff to make sure the safe use.


Wrong bending way

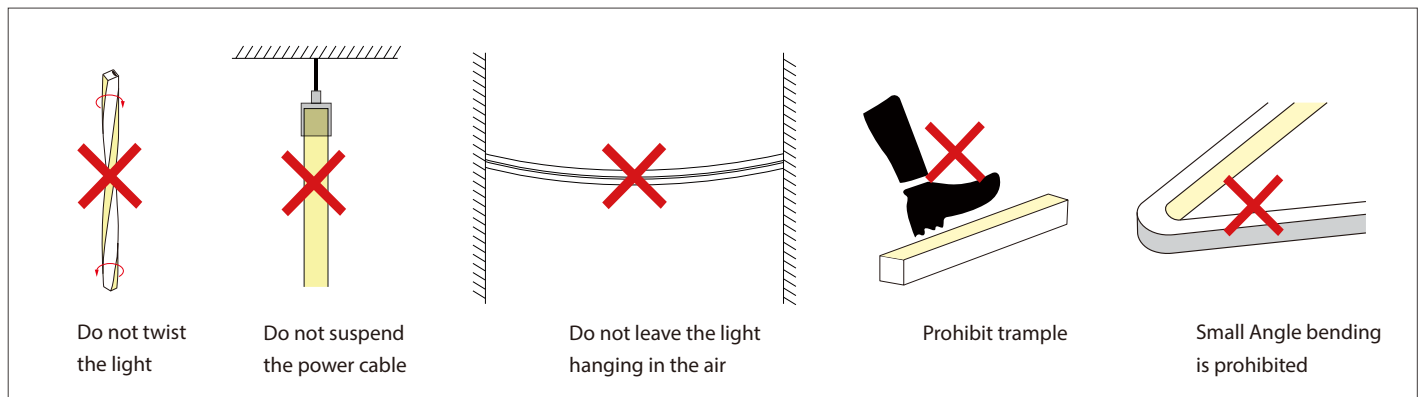

Correct bending way

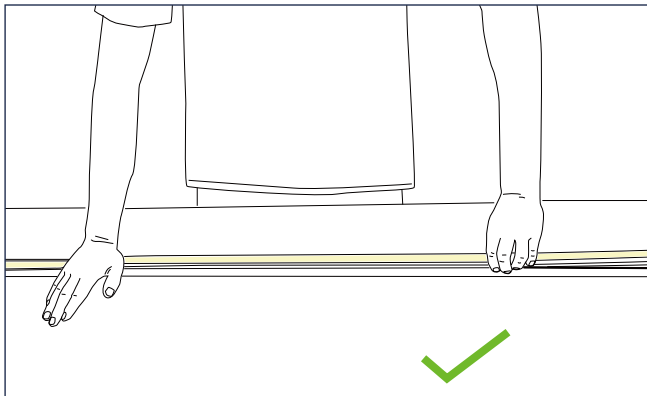


- Please press the led strip with your palm to slowly insert the led strip into the groove, and gently straighten the led strip above the groove with your right hand.
- Try to keep the led strip in a flat state during the installation process.

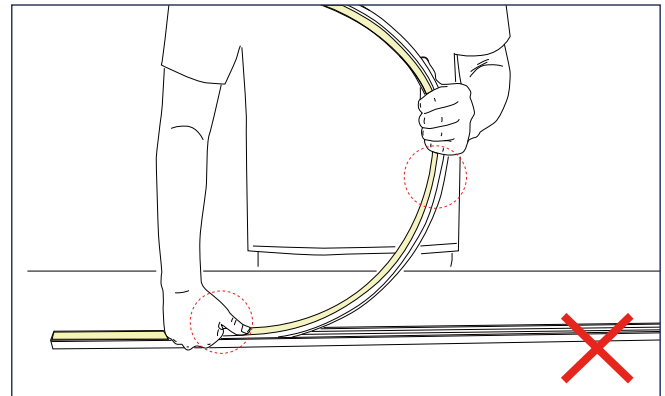

- Do not press the led strip with a single finger, it is easy to damage the internal parts of the led strip.
- The bent arc of the led strip should not be too large during installation.

Installation Precautions -- Side Mounted

(If the length of the light is more than 2 meters, two persons must work together to install it.)

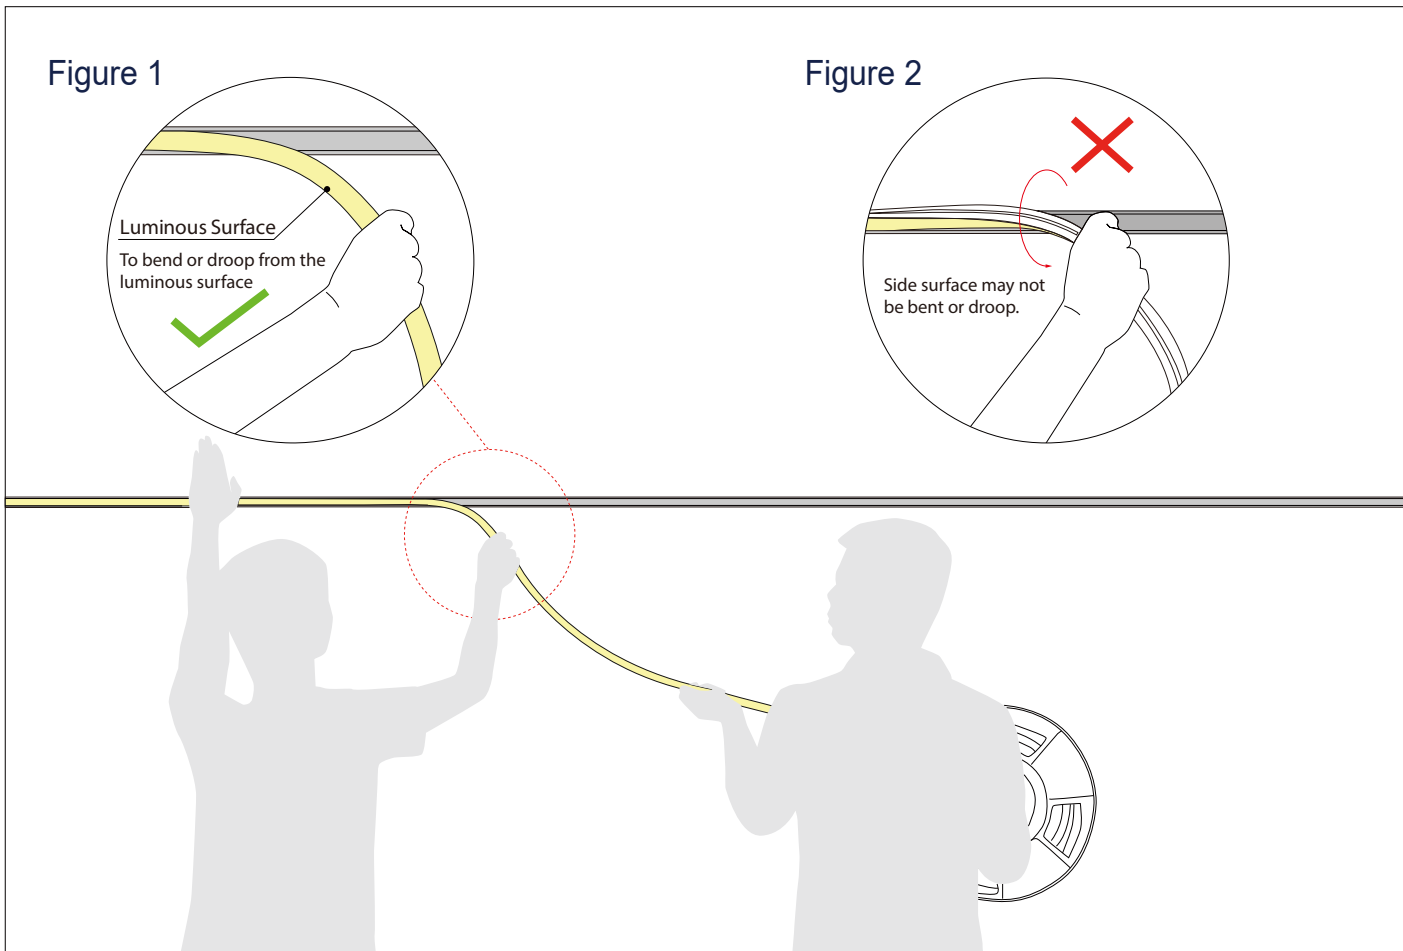

1. Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand so that it droop it in the direction of your hand. See Figure 1.
- Side surface may not be bent or droop, See Figure 2.

2. Assistant:

- Cooperate with the installer to lift the reel of the light, and then slowly deliver the light to installer. Do not pull or twist the light during the installation.

Package of neon strip (5M/Roll)

