



SurMountor



SUR-5050FW200-24V

FLEXIBLE STRIP introduction

Product specification

Lister: Lxlan

Assessor: 

Approver: 

Features:


- Available in 24V DC maximum.
- Very bright & low power consumption.
- Operating temperature: -20~50°C.
- Long life span LED lights, more than 50,000 hours+.
- Adhesive back, peel & stick!
- All available controller or dimmers.
- Non Water-proof, IP20.

Applications:

Ideal for sign letters and channel letters, concealed lights, room lighting, equipment.




Assembly drawing

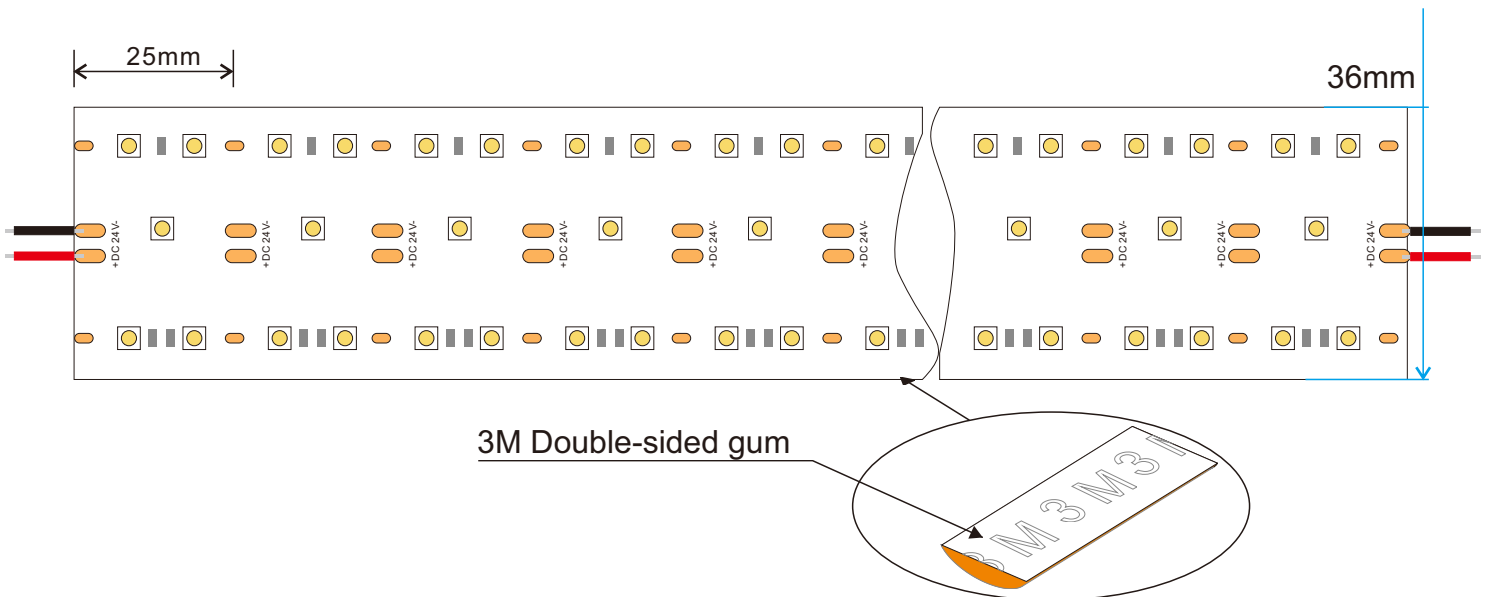
Top View




Section



| 5050 200LED/meter | | | | | | | |
|--------------------|---|---------------|-------------|---------|-----|-------------|-------------------|
| Part number | Color | LED QTY/meter | Lumen/meter | Voltage | CRI | Power/meter | packing means |
| SUR-5050FWW200-24V | Warm White  | 200 | 3600 | DC24V | >85 | 57.6W | 2M/pcs; 2pcs/reel |
| SUR-5050FNW200-24V | Natural White  | 200 | 3800 | DC24V | >85 | 57.6W | 2M/pcs; 2pcs/reel |
| SUR-5050FCW200-24V | Cool White  | 200 | 4000 | DC24V | >85 | 57.6W | 2M/pcs; 2pcs/reel |

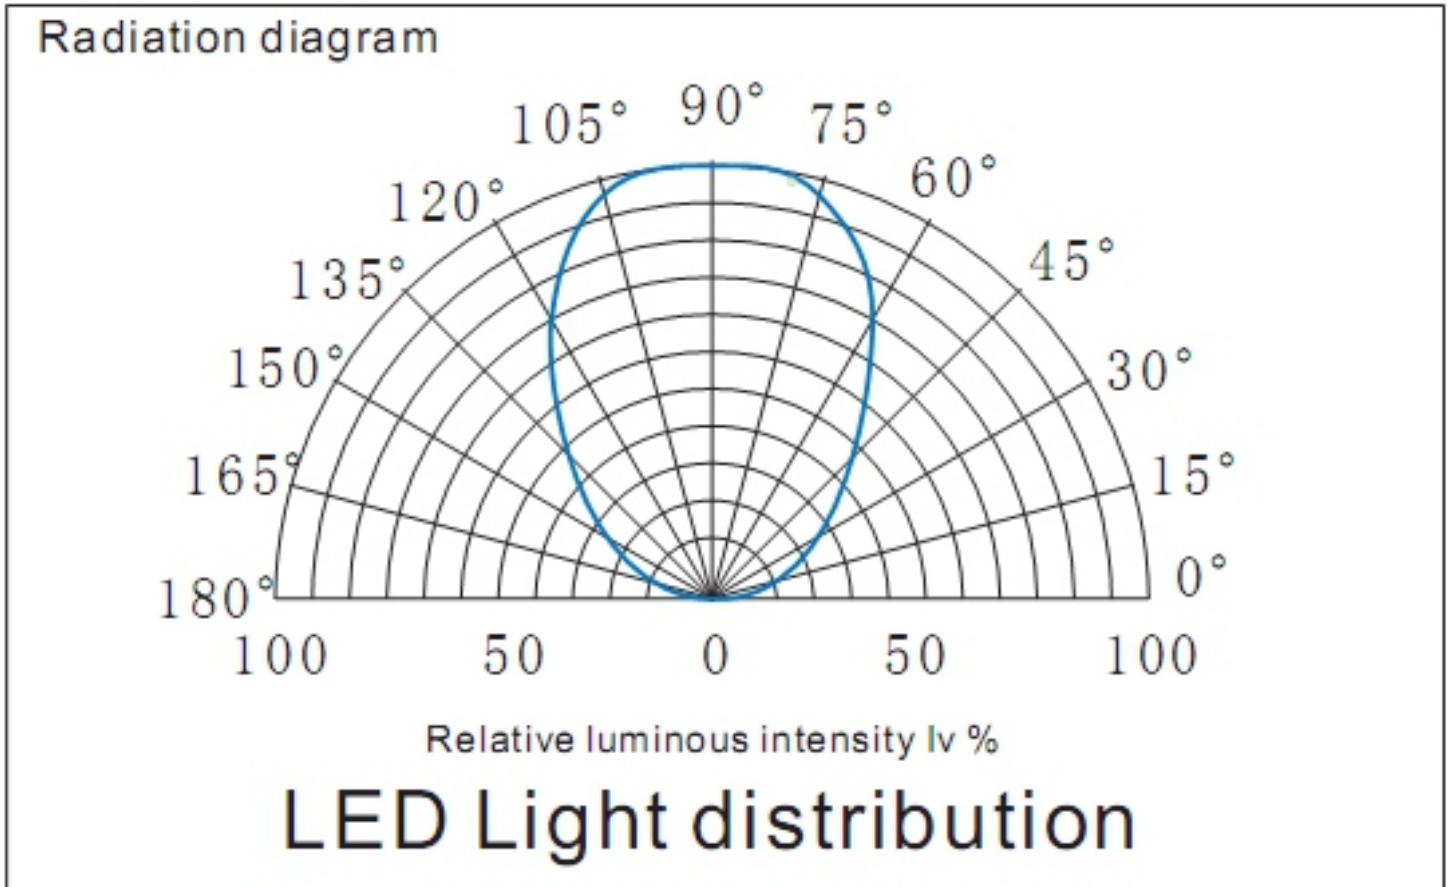


Color Spectrum (CRI80)

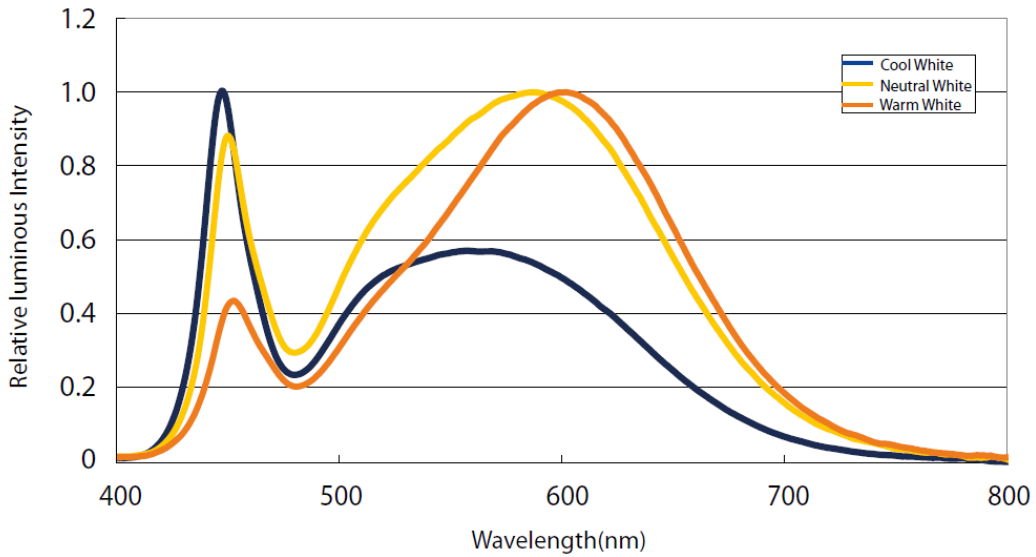

for: white LED

How to connect flexible strip

Below shows you how to connect the flexible strip to power supplies.

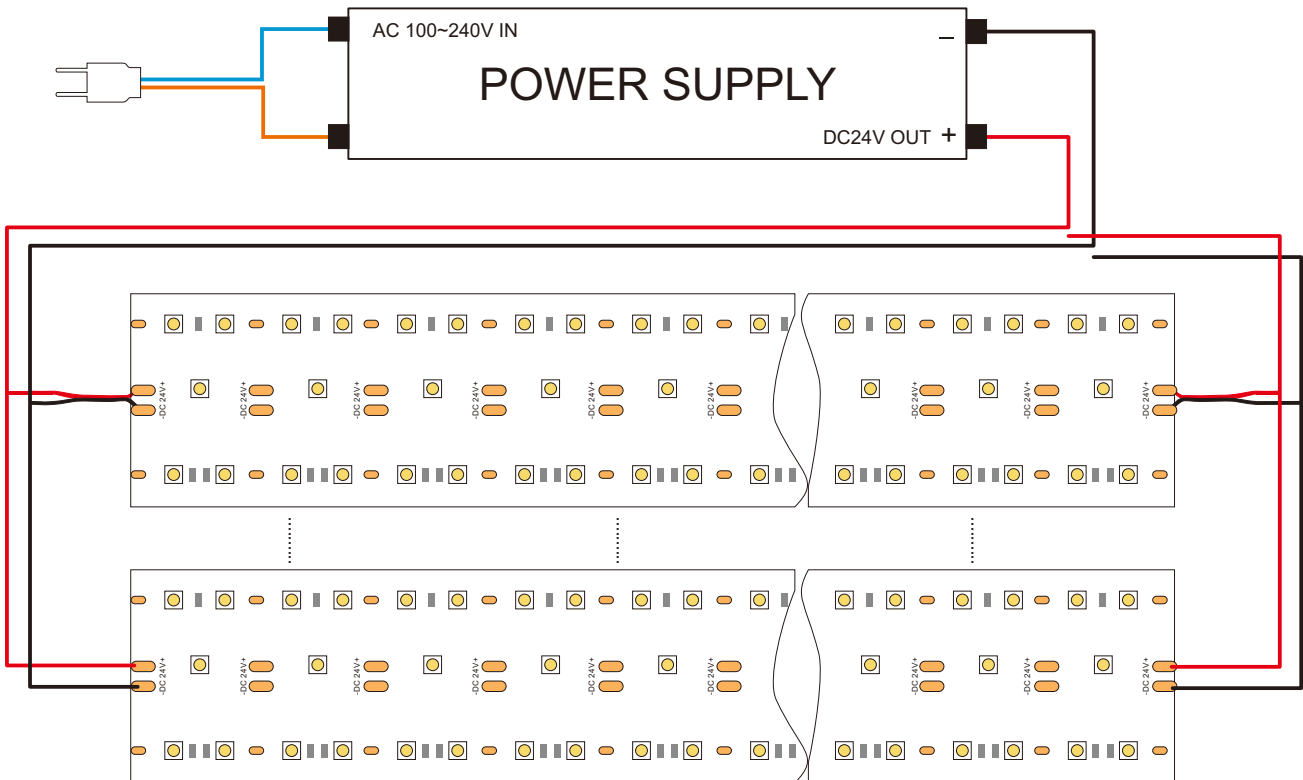

Note:

Please note that, the LED strips should not be used in sealed or hot place, to make sure the heat Dispersion is good for the LEDs.

Each flexible strip with a total length of the series can not be more than 5 meters.

Flexible strip with all of the total power can not exceed 90% of the power switching power supply.

Package:



1 reel/bag



3 bags/Inner Box

Inner box
size:25x26x31cm



6 Bags/Outer Box





Outer box
size:34x52x27cm




Package: 4 meter strip in one reel, one reel in one anti-static bag, 3 bags put into one inner box, 2 inner box put into one carton.

! Cautions:

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:

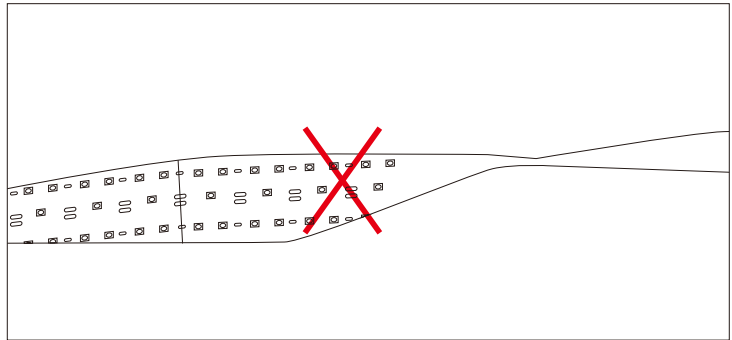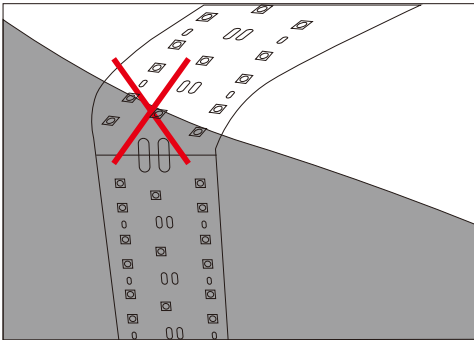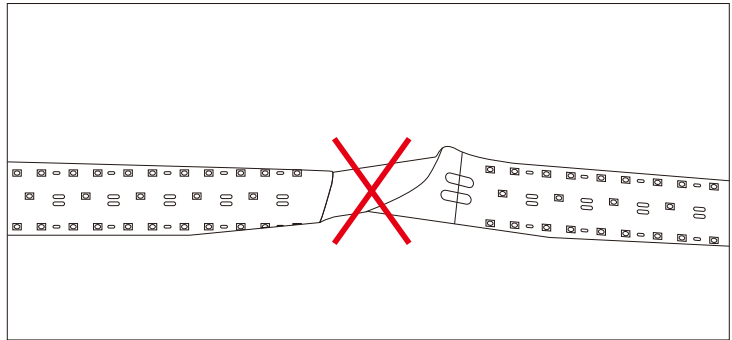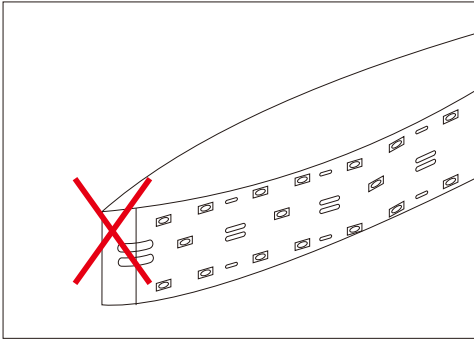

Distortion(Wrong)

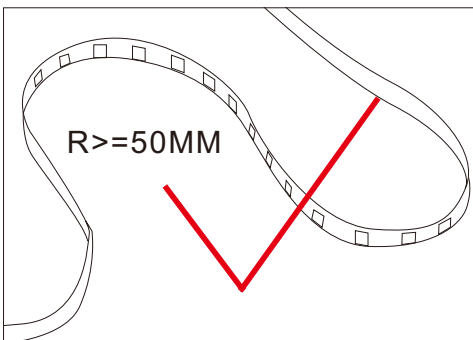

Bend (Right)