



SUR-5025FWW+CW60-12V

FLEXIBLE STRIP introduction

Lister: Lxlan

to long Assessor:

Approver:



Features:

Available in 12V DC maximum.

Very bright & low power consumption.

Operating temperature: -20~50°C.

Long life span LED lights, more than 50,000 hours+.

Adhesive back, peel & stick!

All available controller or dimmers.


No Water-proof, IP20.

Applications:

Ideal for sign letters and channel letters, concealed lights, room lighting, equipment.

Assembly drawing

Top View

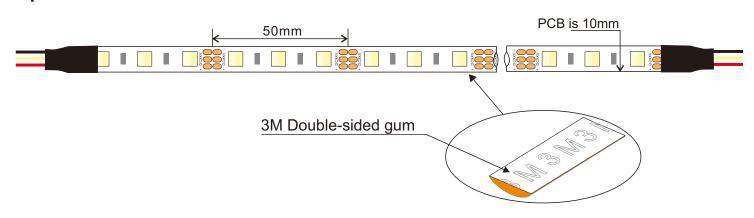


Section





Dropper series:5025-60LED/meter						
Part number	Color	LED QTY/meter	Lumen/meter	Voltage	Power/meter	packing means
SUR-5025FWW+CW60-12V	WW+CW 👖	60	600+600	DC12V	14.4 watt	5 meter/reel

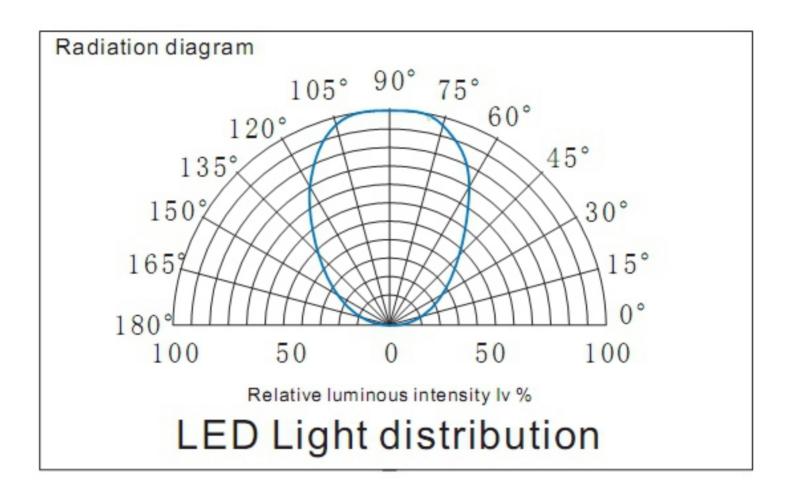











Color Spectrum (CRI80)

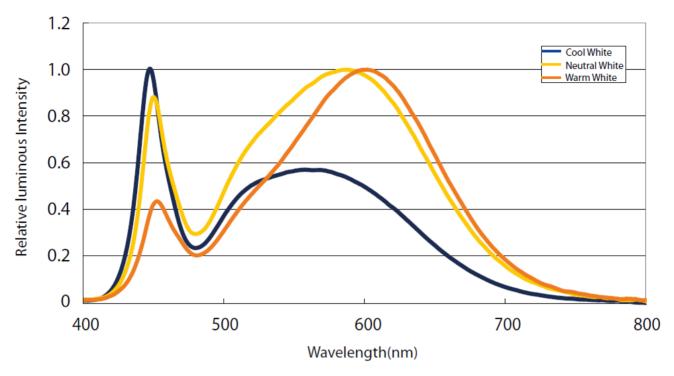

for: white LED

How to connect flexible strip

Below shows you how to connect the flexible strip to power supplies.

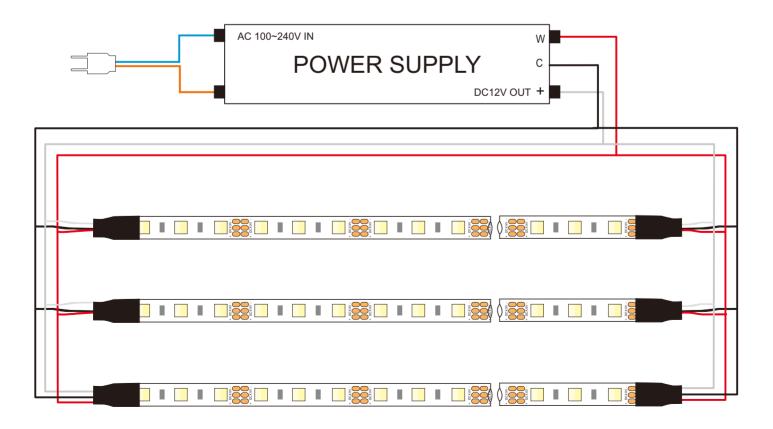



Package:




Package: 5 meter strip in one reel, one reel in one anti-static bag, 25 bags put into one inner box, 2 inner box put into one carton.








Cautions:

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:




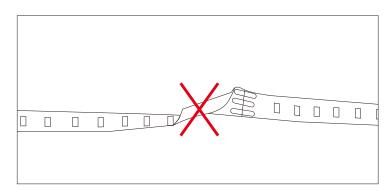



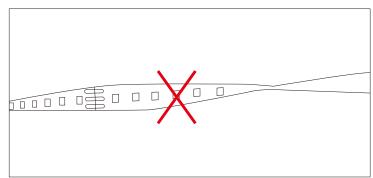

Distortion(Wrong)



Bend (Right)