

# FCOB528-12V-M8-FC

## FLEXIBLE STRIP INTRODUCTION

Product specification


Lister:       

Assessor:       

Approver:

# Features:

- New Flip Chip On Board Flexible LED Strip, 528 chips per meter.
- Ideal for LED lighting application to avoid multi-shadows.
- Higher heat conductivity for better thermal management.
- Provide variable and innovative array LED layout designs and combinations.
- Cutting of any length.
- Available in 12V DC maximum.
- Very bright & low power consumption.
- Operating temperature: -20°C to +50°C.
- Long life span LED lights, more than 50,000 hours.
- Adhesive back, peel & stick!
- All available controller or dimmers.
- Non-waterproof, IP20<sup>1</sup>.




# Applications:

Ideal for sign letters and channel letters, concealed lights, room lighting, equipment.

# Assembly drawing :


## Top View

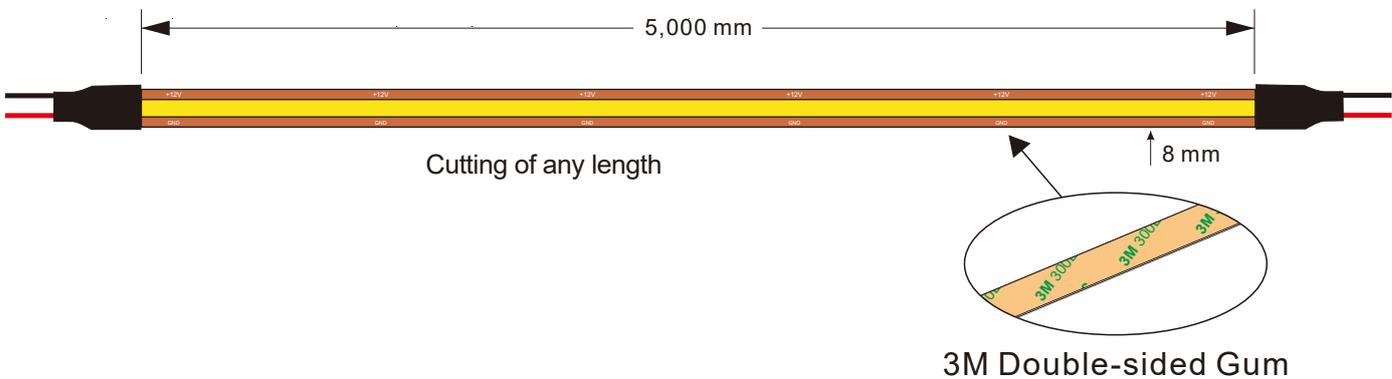


## Section



Dropper series: FCOB528-12V-M8-FC							
Part number	Color	LED QTY/meter	Lumen/meter	CRI	Voltage	Power/meter	Packing means
FCOB528-12V-M8-FC	WW 	528	910	90+	DC12V	13 Watt	5 meters/reel
	NW 		940				
	CW 		920				

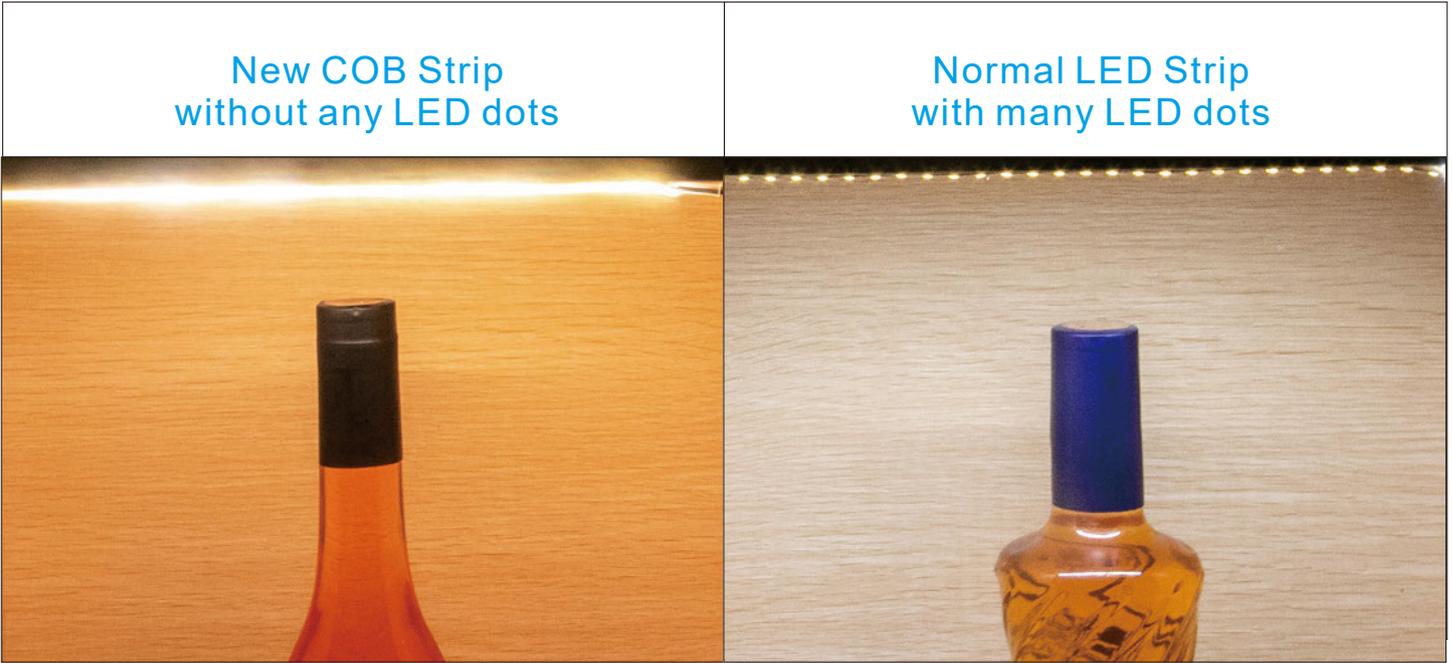


## LED Light distribution

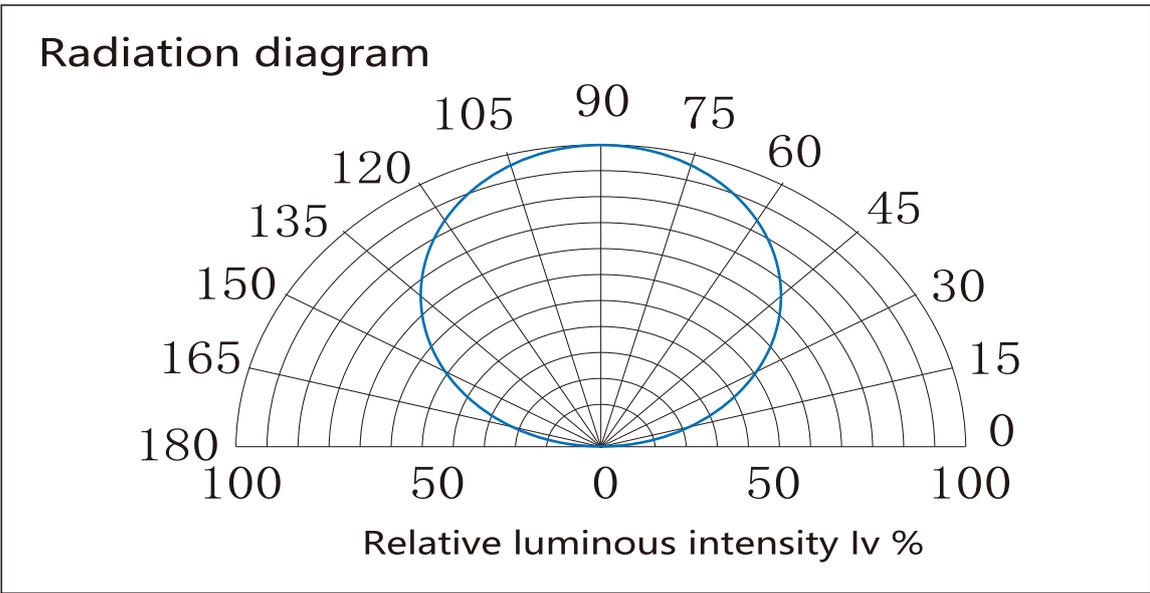


## Color spectrum (CRI90+)

For: white LED

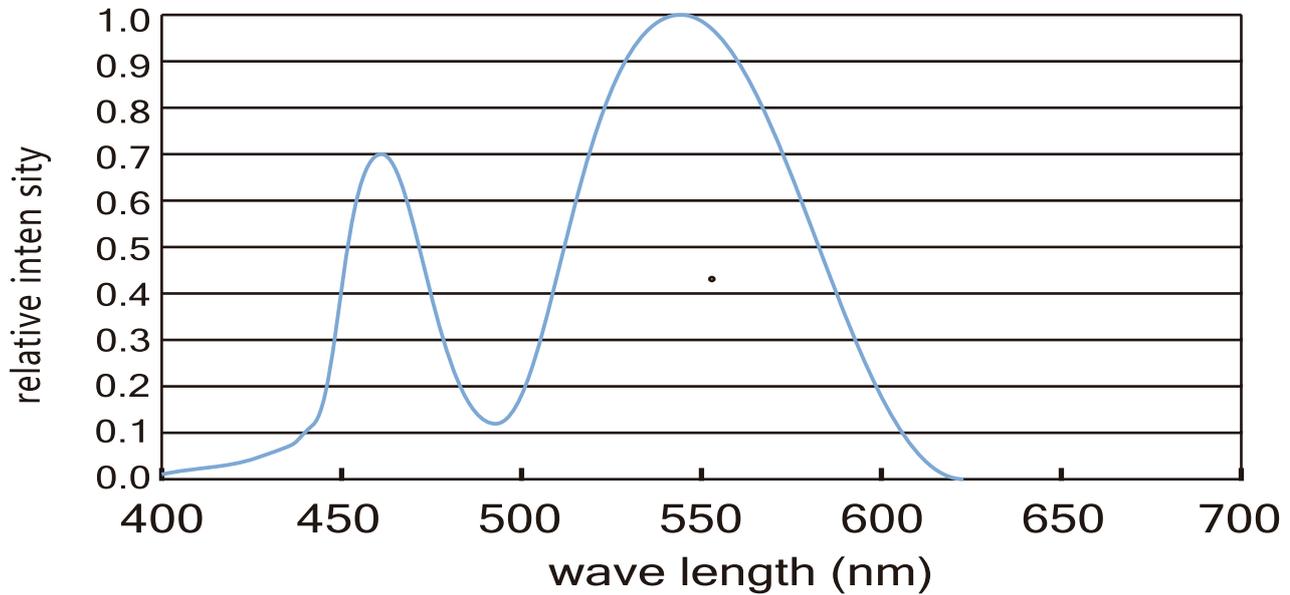

## Package:



5 meters/reel



1 reel/bag



Outer box  
size:34x52x27cm

25 Bags/Inner Box




Outer box  
size:34x52x27cm

50 Bags/Outer Box

**Package:** 5 meters strip in one reel, one reel in one anti-static bag, 25 bags put into one carton, 2 inner boxes put into 1 carton .

## How to connect flexible strip:

Below shows you how to connect the flexible strip to power supplies

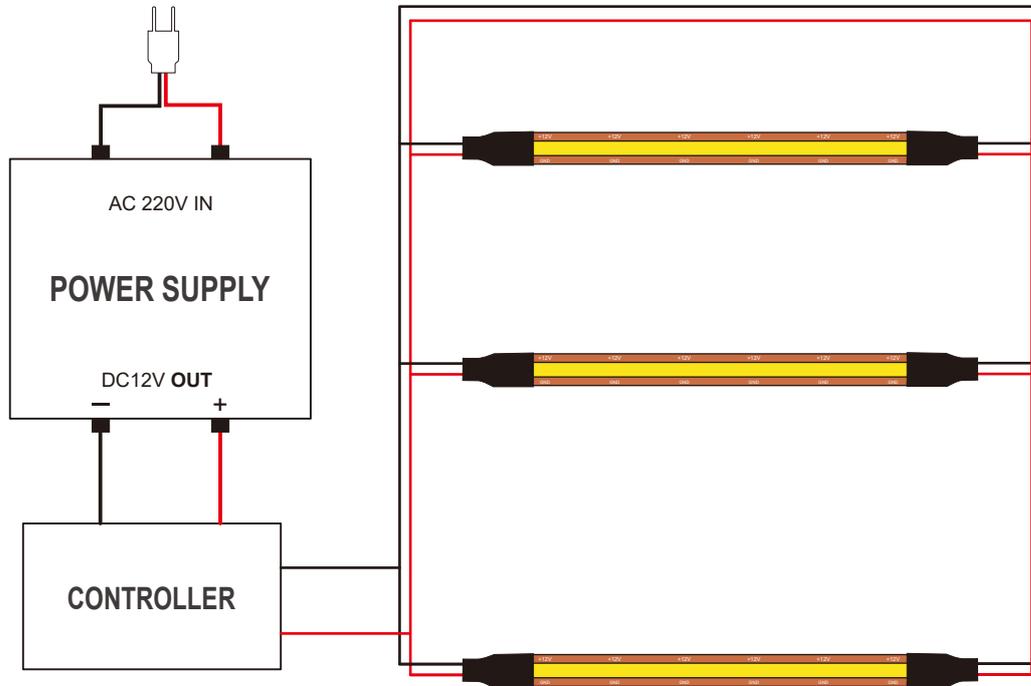





### Note:

- Please note that, the LED strips should not be used in sealed or hot place, to make sure the heat dispersion is good, mount the LED strip in Aluminium Chanel.
- Each flexible strip with a total length of the series can not be more than 5 meters. (Recommnd running length: single power supply: 3m max for 12V, 5m max for 24V. Double power supply: 6m max for 12V, 10m for 24V).
- Flexible strip with all of the total power can not exceed 80 % of the power switching power supply.

## Cautions:

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:

### Distortion(Wrong)

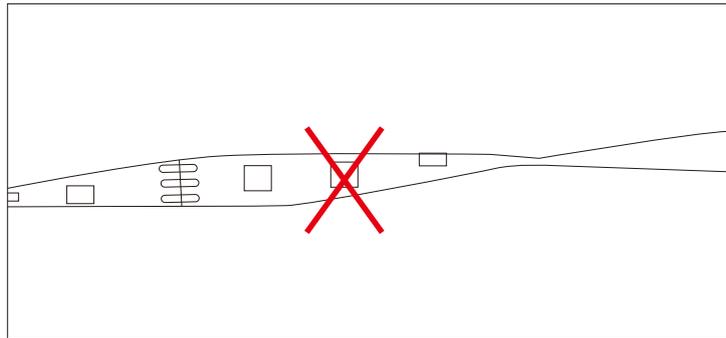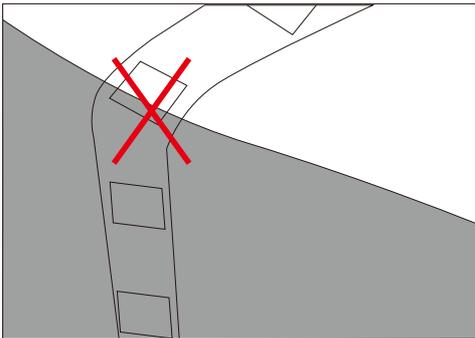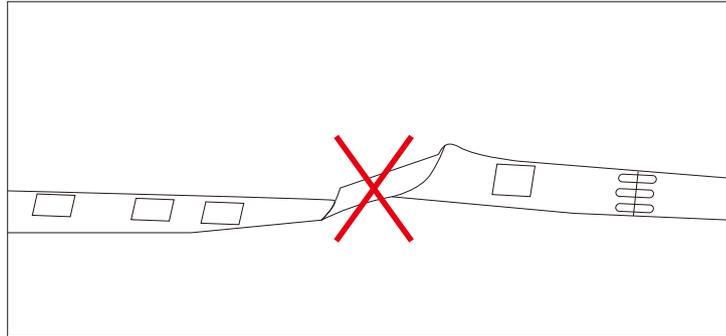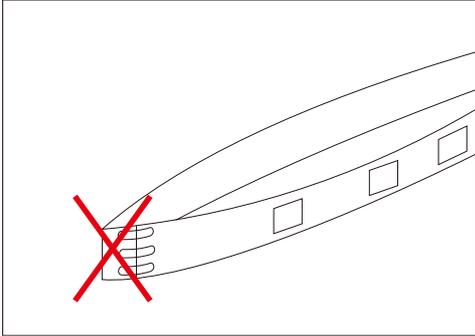

---

### Bend (Right)

