# DuPont interface cabinet power supply IP20

#### Features:

• Input Voltage: AC110-240V 50/60Hz

• Power Range:24W-100W

• High Efficiency: up to 85%; PF>0.5


• IP20 Design


· Cooling by free air convection

• Suitable for dry or damp location use

Multiple protections like short circuit& over-current & over-voltage protection

• 3 years warranty

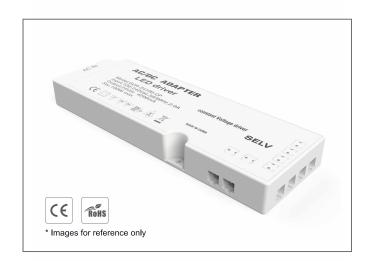

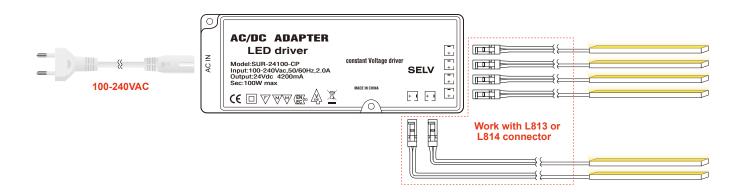


Model No.	Picture	Power	Output Voltage	Output Current	Size (L*W*Hmm)
SUR-24024-CP	AAA EE EE O	24W		1000mA	- 120*55*18
SUR-24036-CP	AAA ES DO COMPANYA CO	36W		1500mA	
SUR-24060-CP	MOVERO DEPOTED.  Market and the property of th	60W	24V	2500mA	165*55*18
SUR-24080-CP	WALL OF THE PARTY	80W		3300mA	
SUR-24100-CP	FOR ANGEL AND ANGEL OF THE PROPERTY OF THE PRO	100W		4000mA	

## Specifications

Output	DC Voltage	24VDC	
	Line regulation	1%	
	Hold up time	≥10ms	
	Max.peak to peak ripple&noise	150mV	
Input	Efficiency	≥85%	
	Frequency Rang	47-63HZ	
	Power factor	>0.5	
	AC current	0.218A@115VAC; 0.109A@230VAC	
Protection	Over load current protection	OK	
	Over Voltage protection	ОК	
	Short circuit protection	ОК	
	Over temperature protection	OK	
Environment	Working Temperature	0°C to 40°C	
	Operation Relative Humidity	20% to 80%	

#### Package

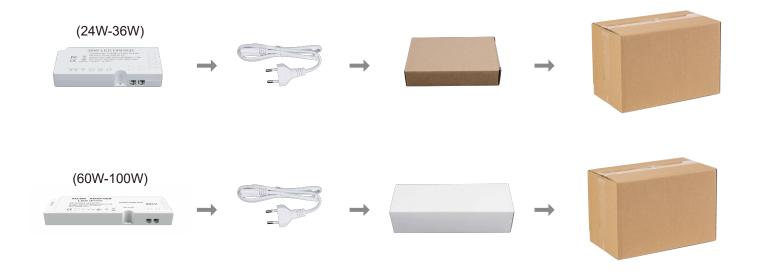

## Warning

- 1) This driver should be installed by qualified and professional person;
- 2) Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- 3) Ensure that wiring is correct before test in order to avoid light and power supply damage;
- 4) If driver Cannot work normally, don't maintain privately; Have any question, please contact us.