


# Bendable LED Aluminum Profile-C1806




**Customized Color can be ordered**

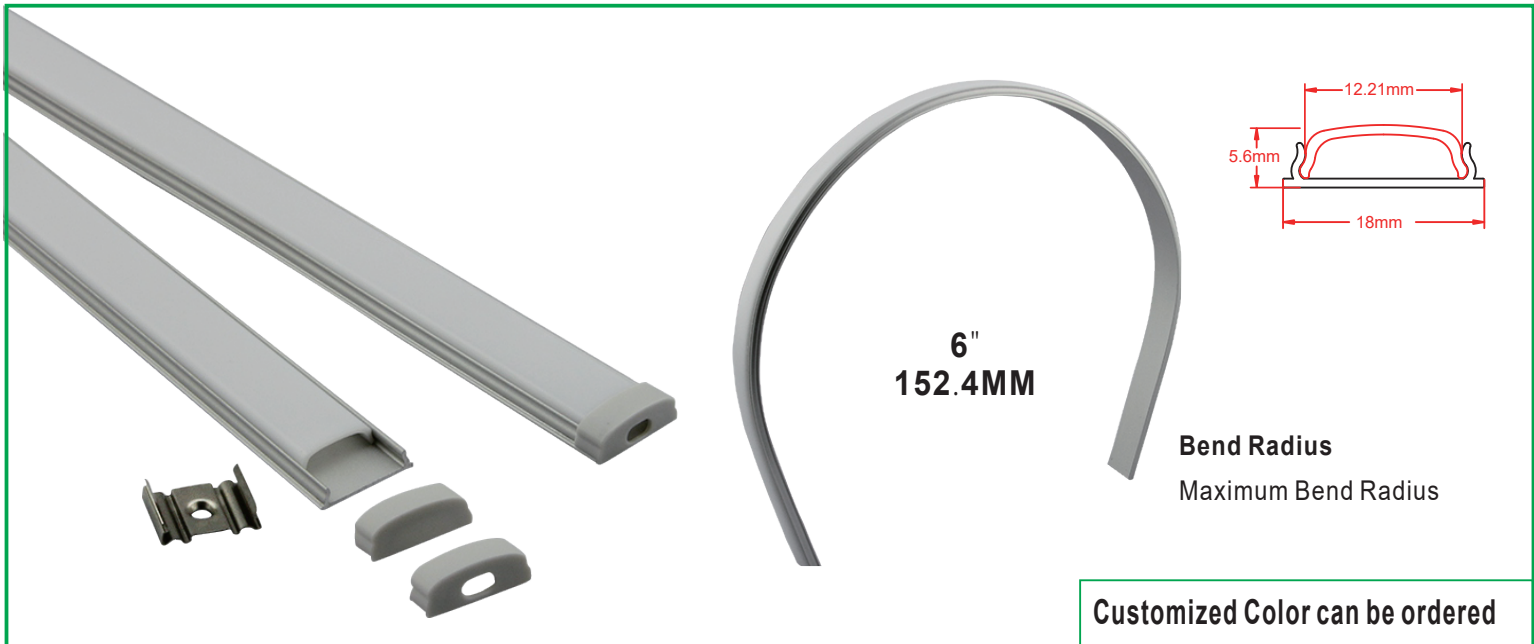


<b>Material</b>	Body-Aluminum, Cover-Polycarbonate(PC), End cap-Polycarbonate(PC) Stainless Steel Mounting Bracket.
<b>Lighting Transmittance</b>	Transparent, Milky, Frosted Cover.
<b>Operating Temperature Range</b>	-30°C - 60°C(-22°F~140°F)
<b>Flammability</b>	V2 Fire Rating for PC Cover.
<b>UV Stability</b>	Ageing resistance
<b>Heat Stability</b>	Under 100°C
<b>UL94 Rating</b>	UL94V2
<b>Grade of Aluminium</b>	6063-T5 Anodizing

## Service Environment and Installation:

### 1, With double-sided tape

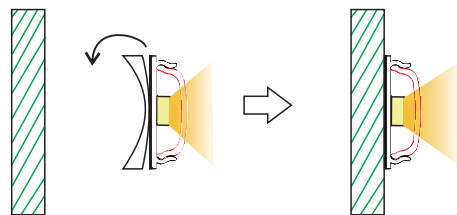


### 2, With Mounting Clip

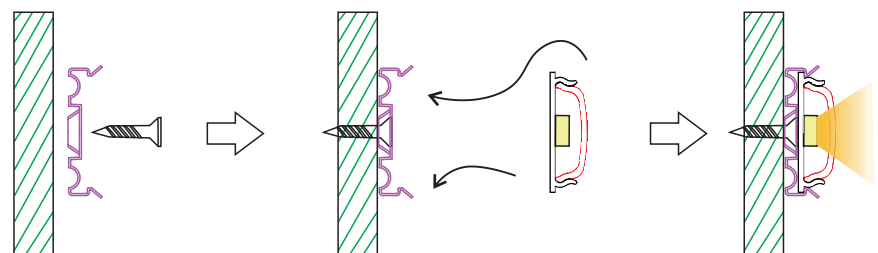

## Applications:

Interior lighting, curved lighting for display counter.

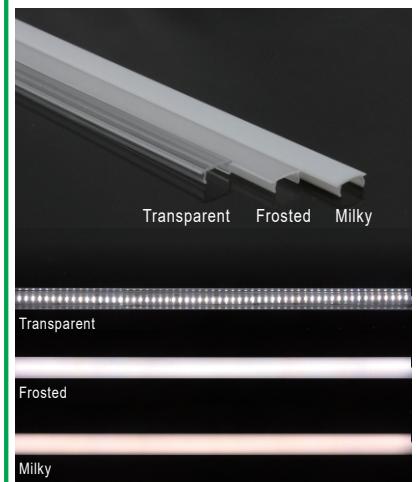

PC Cover

