


Model Number	LED Quantity	LM (3000K)	LM (4000K)	LM (6500K)	Power (W/PC)	NW (kg)	Size (mm)	Recommended length
CLINE-260	12pcs	450	475	470	5	0.105	W18*H23*L260	
CLINE-520	24pcs	900	950	940	10	0.21	W18*H23*L520	
CLINE-780	36pcs	1350	1425	1410	15	0.315	W18*H23*L780	
CLINE-1040	48pcs	1800	1900	1880	20	0.41	W18*H23*L1040	√
CLINE-1300	60pcs	2250	2375	2350	25	0.515	W18*H23*L1300	
CLINE-1560	72pcs	2700	2850	2820	30	0.62	W18*H23*L1560	√
CLINE-1820	84pcs	3150	3325	3290	35	0.725	W18*H23*L1820	
CLINE-2080	96pcs	3600	3800	3760	40	0.83	W18*H23*L2080	√
CLINE-2340	108pcs	4050	4275	4230	45	0.935	W18*H23*L2340	
CLINE-2600	120pcs	4500	4750	4700	50	1.04	W18*H23*L2600	
Color	Black							
Input Voltage	DC24V							
CRI	80-95							
Life Time	50000h							
Beam Angle	40/24/15°optional							
(UGR) Glare value (UGR)	< 19							
Application	Office/Exhibition/Hall							




Installation steps




1. Choose the installation location

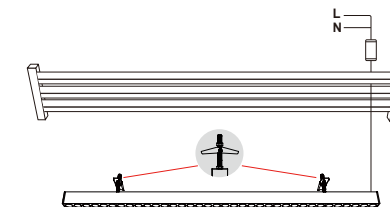

2. Connect the driver to the power

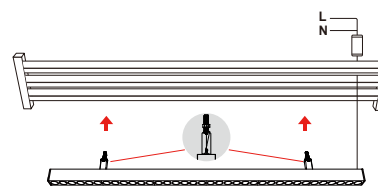

3. Press the mounted plate and install the light into SAPP ceiling.

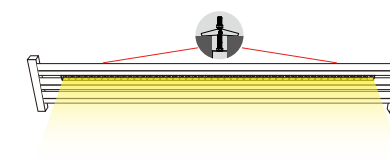

4. Embedded and fixed, the installation is complete

⚠ Notice

1. The light should be installed by professionals, and use electricity safely to prevent electric shock.
2. If there is a fault, it needs to be repaired by professionals or contact the seller for after-sales processing.
3. Please do not modify or change the product or the warranty is not available.