



Free Cut Linear Lighting Series: FC-C1707

Seamless connection | detachable connection

Lister:_

Assessor:_

Approver:




Specification

Model	Voltage	Watt	Lumen	CRI	Color Temperature	Model of LED Beads	Length (including endcaps)	Package
C1707-1000	12VDC	9.6W/M	655	- >80	3000K/ 4000K/ 6500K	2835	1004mm	A light bar.one end caps. Two mounting clips. A power connector (wire length 2m). Frosted PC Cover.
			690					
			680					
C1707-1000	24VDC	9.6W/M	655					
			690					
			680					

Accessories

length can be customized

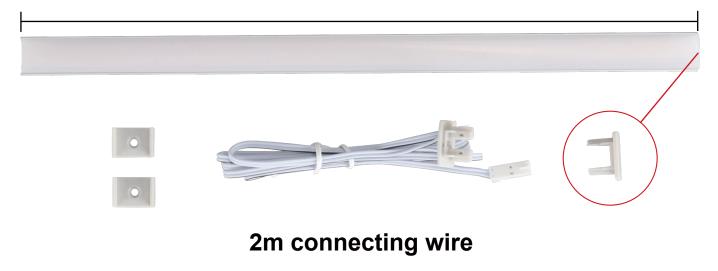






Product Features

• The LED Light is easy to install to wardrobe or shelf with mounting clip accessories. New design with separation of light bar and power wire, easy to install, remove and replace. With modern design, it is suitable for cabinet/furniture / room / ceiling hanging lighting etc. Substantial aluminum mass provide good heat sink for high power leds. It's perfect for seamless connection, no dark space.






Structure & Spec.

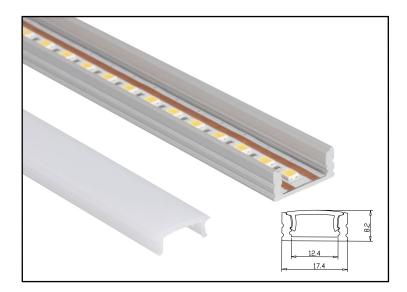


Model	FC-C1707
Size (mm)	17.4*8.2
Material	6063 T5 Aluminum Alloy
Finish	Aluminum Anodized
Color	Sliver/White/Black
Lighting direction	Front luminous
Installation	Surface mount
Color Temperture	3000K/ 4000K/ 6500K
	000010 400010 000010
Voltage	12V/24V
Voltage Power(W/PC)	
	12V/24V

How to install


1.With clip

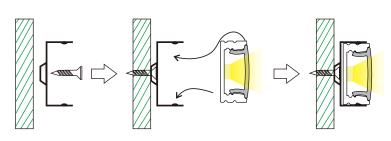


2.With double-sided tap



relative intensity

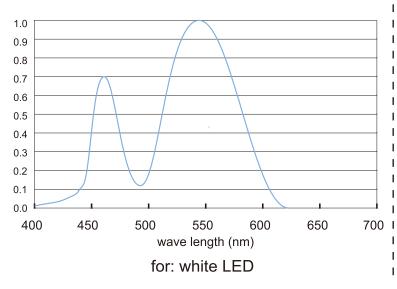

Radiation diagram



Surmountor Lighting CO Limited Tel.: +86-755-27926119

Email:sales@surmountor.com

Address: 2nd Floor, Building D, NO.5, Fu Rui Road, Qiao Tou, Fuyong town, 518103, Bao An district, Shenzhen, GuangDong Province, China



Recommended model of LED cabinet light power supply

2014 Continuent in the second			
18mm			
E 128mm (E Rove			
CE ROHS			
* Images for reference only			
NULTUR TENTO STATE AND A TO T			
18mm			
			SE 138mm CE Rohs
* Images for reference only			
20mm			
Bonnin 168mm CE Rons			
* Images for reference only			
B			
244 LEDBer Alert & Sea Ba			
· · · · · · · · · · · · · · · · · · ·			
• C ⊡ O G I V V SW CC			



CE

* Images for reference only

RoHS




SUR-24036-CP	A BAR		
DC Voltage: 24VDC	Martin Constant and Constant an		
Rated Current: 1.5A			
Rated Power: 36W max			
Voltage Range: 100-240VAC	Amon -		
Frequency Rang: 50-60HZ	ESAMA AASII		
This Power supply is with 6 outlets for 24vdc led light, and 1 outlet for sensor switch.	* Images for reference only		
SUR-24060-CP-D	* BBB & & + +		
DC Voltage: 24VDC	Sar Sar 19mm		
Rated Current: 2.5A	A THE STORE AND		
Rated Power: 60W max			
Voltage Range: 100-240VAC			

CONN

Frequency Rang: 50-60HZ

This Power supply is with 7 outlets for 24vdc led light, and 1 outlet for sensor switch.

installation procedure

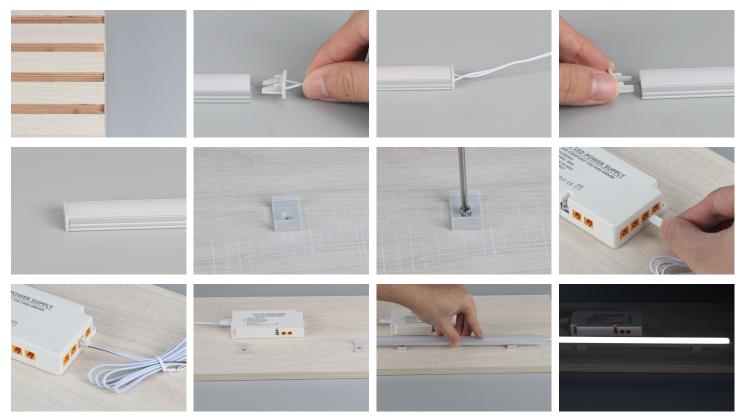

Surmountor Lighting CO Limited Tel.: +86-755-27926119 Email:sales@surmountor.com Address: 2nd Floor, Building D, NO.5, Fu Rui Road, Qiao Tou, Fuyong town, 518103, Bao An district, Shenzhen, GuangDong Province, China