



Free Cut Linear Lighting Series: FC-A1410

Seamless connection | detachable connection

Lister:_

Assessor:

Approver:




Specification

Model	Voltage	Watt	Lumen	CRI	Color Temperature	Model of LED Beads	Length (including endcaps)	Package
A1410 -1000	12VDC	9.6W/M	340	>80	3000K/ 4000K/ 6500K	2216	1004mm	A light bar. one end caps. Two mounting clips. A power connector (wire length 2m). Frosted PC Cover.
			355					
			350					
A1410-1000	24VDC	9.6W/M	340					
			355					
			350					

Accessories

length can be customized

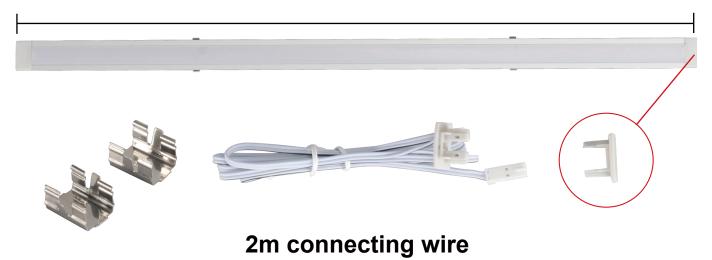






Product Features

• The LED Light is easy to install to wardrobe or shelf with mounting clip accessories. New design with separation of light bar and power wire, easy to install, remove and replace. With modern design, it is suitable for cabinet/furniture / room / ceiling hanging lighting etc. Substantial aluminum mass provide good heat sink for high power leds. It's perfect for seamless connection, no dark space.





Structure & Spec.

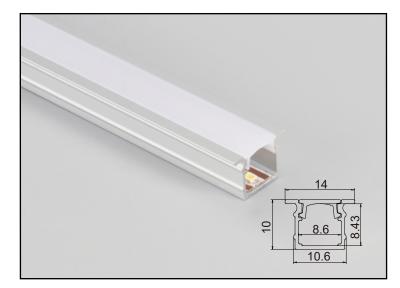

Model	FC-A1410
Size (mm)	14*10.6
Material	6063 T5 Aluminum Alloy
Finish	Aluminum Anodized
Color	Sliver/White/Black
Lighting direction	Front luminous
Installation	Recessed Mounting
Color Temperture	3000K/ 4000K/ 6500K
Voltage	12V/24V
Power(W/PC)	9.6W/M
Power output contact	SlingShot Contact
CRI (RA)	>80

How to install

1. Horizontal installation

2. vertical installation

100

Relative luminous intensity lv %

LED Light distribution

L


T

Т

Т

700

The slotting dimension is 11mm wide and the depth is 10 mm

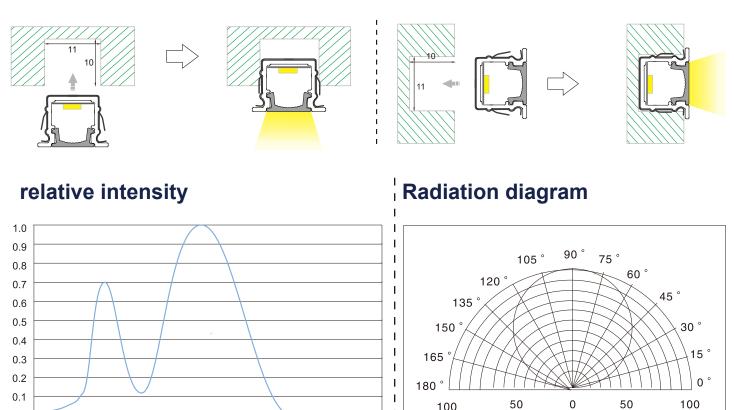

450

500

0.0

400

Email:sales@surmountor.com

650

600

550

wave length (nm)

for: white LED

Address: 2nd Floor, Building D, NO.5, Fu Rui Road, Qiao Tou, Fuyong town, 518103, Bao An district, Shenzhen, GuangDong Province, China



Recommended model of LED cabinet light power supply

SUR-12024-CP					
DC Voltage: 12VDC	THE AREA AND AND AND AND AND AND AND AND AND AN				
Rated Current: 2A	18mm				
Rated Power: 24W max					
Voltage Range: 100-240VAC	ernn				
Frequency Rang: 50-60HZ	SEAMIN N25. CE ROHS				
This Power supply is with 4 outlets for 12vdc led light, and 1 outlet for sensor switch.	* Images for reference of				
SUR-12036-CP					
DC Voltage: 12VDC					
Rated Current: 3A	36W 100 Colombian and and a state of the sta				
Rated Power: 36W max	18mm				
Voltage Range: 100-240VAC					
Frequency Rang: 50-60HZ	SSIMM NOS				
This Power supply is with 6 outlets for 12vdc led light, and 1 outlet for sensor switch.	* Images for reference only				

SUR-12060-CP

DC Voltage: 12VDC

Rated Current: 5A

Rated Power: 60W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 7 outlets for 12vdc led light, and 1 outlet for sensor switch.

SUR-24024-CP-D

DC Voltage: 24VDC

Rated Current: 1A

Rated Power: 24W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 4 outlets for 24vdc led light, and 1 outlet for sensor switch.







Free cut line light series

SUR-24036-CP	- Carlos
DC Voltage: 24VDC	Auf Laure and Andrew a
Rated Current: 1.5A	
Rated Power: 36W max	
Voltage Range: 100-240VAC	mm
Frequency Rang: 50-60HZ	ESAMA 1457.
This Power supply is with 6 outlets for 24vdc led light, and 1 outlet for sensor switch.	* Images for reference only

SUR-24060-CP-DDC Voltage: 24VDCRated Current: 2.5ARated Power: 60W maxVoltage Range: 100-240VACFrequency Rang: 50-60HZThis Power supply is with 7 outlets for 24vdc led light,
and 1 outlet for sensor switch.

installation procedure

