


Functions

Model	IROO9A-D
Operation	Automatically switch on/off when door is open/closed.
Input Voltage	12V-24V DC
Output Voltage	12V-24V DC
Input Current	4A
Detection Range	0.5cm≤Length≤10cm
Load Around	48W for 12V, and 96W for 24V
Detector cable length	1m (Length can be customized)
Input/output cable length	1m (Length can be customized)


Connection Diagram

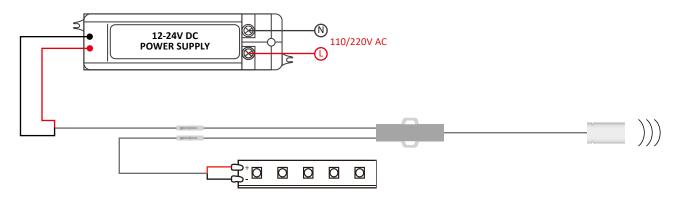


Operations

- The LED lamp connects to the output end.
- The IR sensor switch will turn on the LED light when the door is open and will turn off the LED light when the door is closed.
- Detection range is 10cm from the sensor detector to the door.
- The sensor switch will turn on or off the LED light with above repeatable steps.


Installation Steps




Drill a 10mm hole on the cabinet.



Thread the cable through the drilled hole to secure the sensor to the cabinet.



Connect the sensor and power supply as correct way.



Light on when open the cabinet door.




Recommened Profiles/Optional


Model	Color	Size(mm)	Length	Drawing	Photo	Installation	
A1707	7 White 17.4*82 1–3m			17.4 12.4		Surface mounting	
A1715	Black	17.4*15.7	1–3m	17.4		Surface mounting	
A1920	Aluminum	19.9*18.5	1–3m	18.5		Surface mounting	

Recommened Strips/Optional

General description

- Available in 12/24V DC maximum
- CRI80 & CRI90 LED Strip are available
- Working temperature: -20°C to +50°C
- Very bright & low power consumption
- Long life span LED lights, more than 50,000 hours
- Adhesive back, peel & stick
- IP20, IP65, IP67 are available





Electronic & Output Data

SMD2835, 60 LEDS/m

Size (mm)	Color	CRI	Photo	LED Qty/m	Lumen/m	Voltage (V)	Power (W/m)	Packing (m/reel)
L5000*W8*H1.5	WW NW CW	90+		60	1000 1100 1200	12/24V	14.4	5

SMD2835, 120 LEDS/m

Size (mm)	Color	CRI	Photo	LED Qty/m	Lumen/m	Voltage (V)	Power (W/m)	Packing (m/reel)
L5000*W10*H1.5	WW NW CW	90+		120	1300 1400 1500	12/24V	14.4	5

SMD2110, 280 LEDS/m

Size (mm)	Color	CRI	Photo	LED Qty/m	Lumen/m	Voltage (V)	Power (W/m)	Packing (m/reel)
L5000*W10*H1.5	WW NW CW	90+		280	1420 1460 1510	24V	19.2	5