




SurMountor

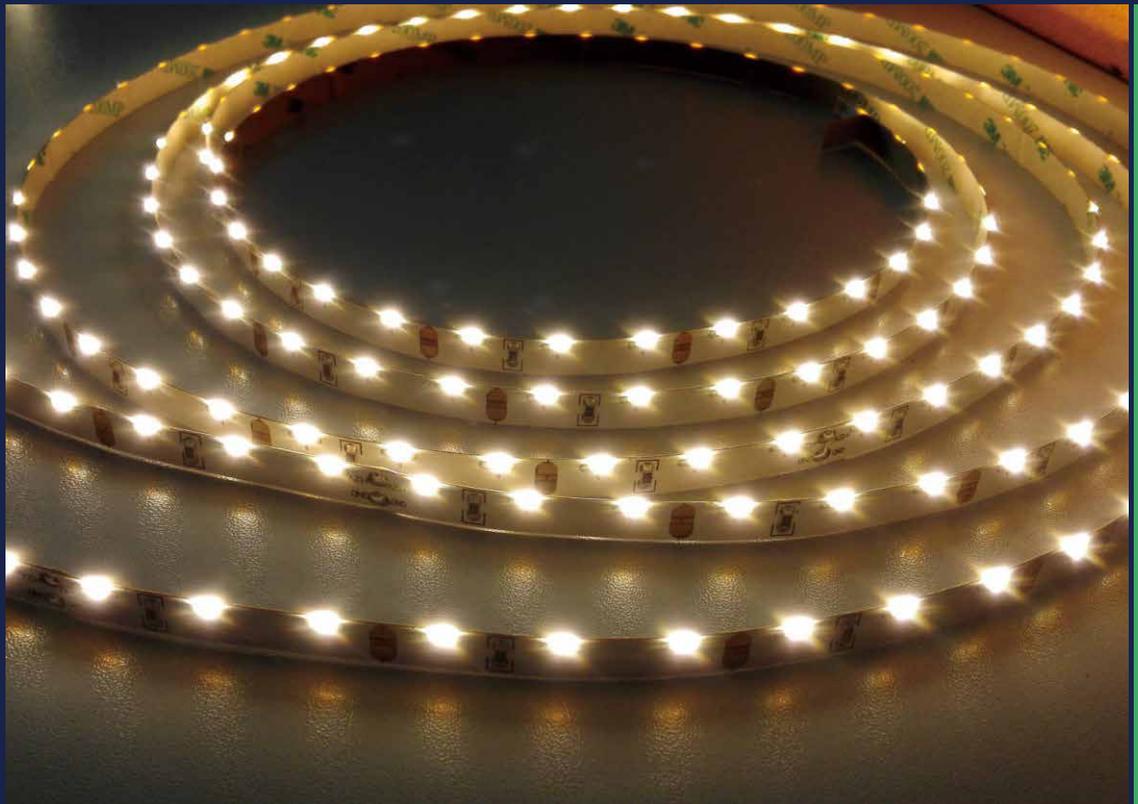

SUR-335FW60-12V

FLEXIBLE STRIP introduction

Product specification

Lister: Lxlan

Assessor: 

Approver: 

Features:


- Available in 12V DC maximum.
- Very bright & low power consumption.
- Operating temperature: -20~50°C.
- Long life span LED lights, more than 50,000 hours+.
- Adhesive back, peel & stick!
- Non-Waterproof

Applications:

Ideal for sign letters and channel letters, concealed lights, room lighting, equipment.

Assembly drawing


Top View

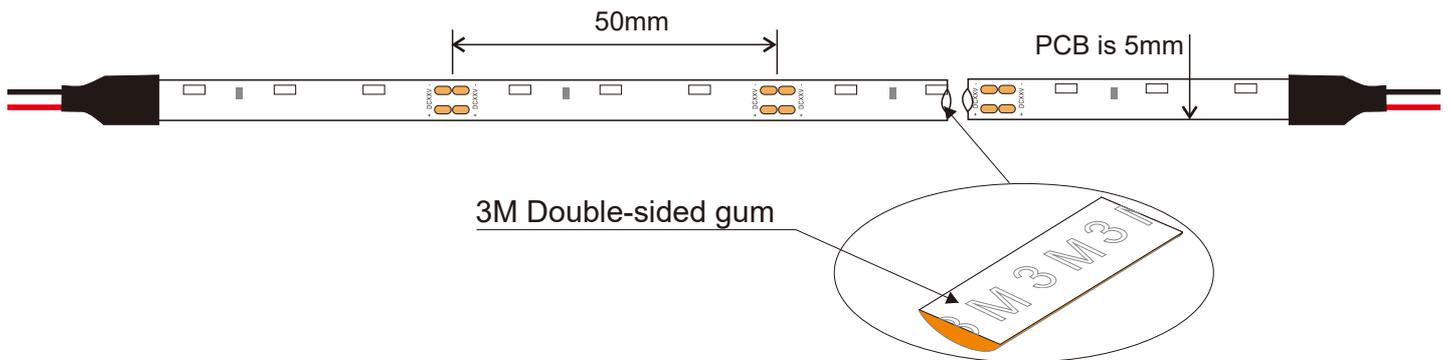


Section



SMD335, 60LED/meter-Side edge emitting								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
SUR-335FWW60-12V	L5000*W5*H3	WW 	3	60	240	12V	4.8W	5Meters/reel
SUR-335FNW60-12V		NW 			300			
SUR-335FCW60-12V		CW 			360			

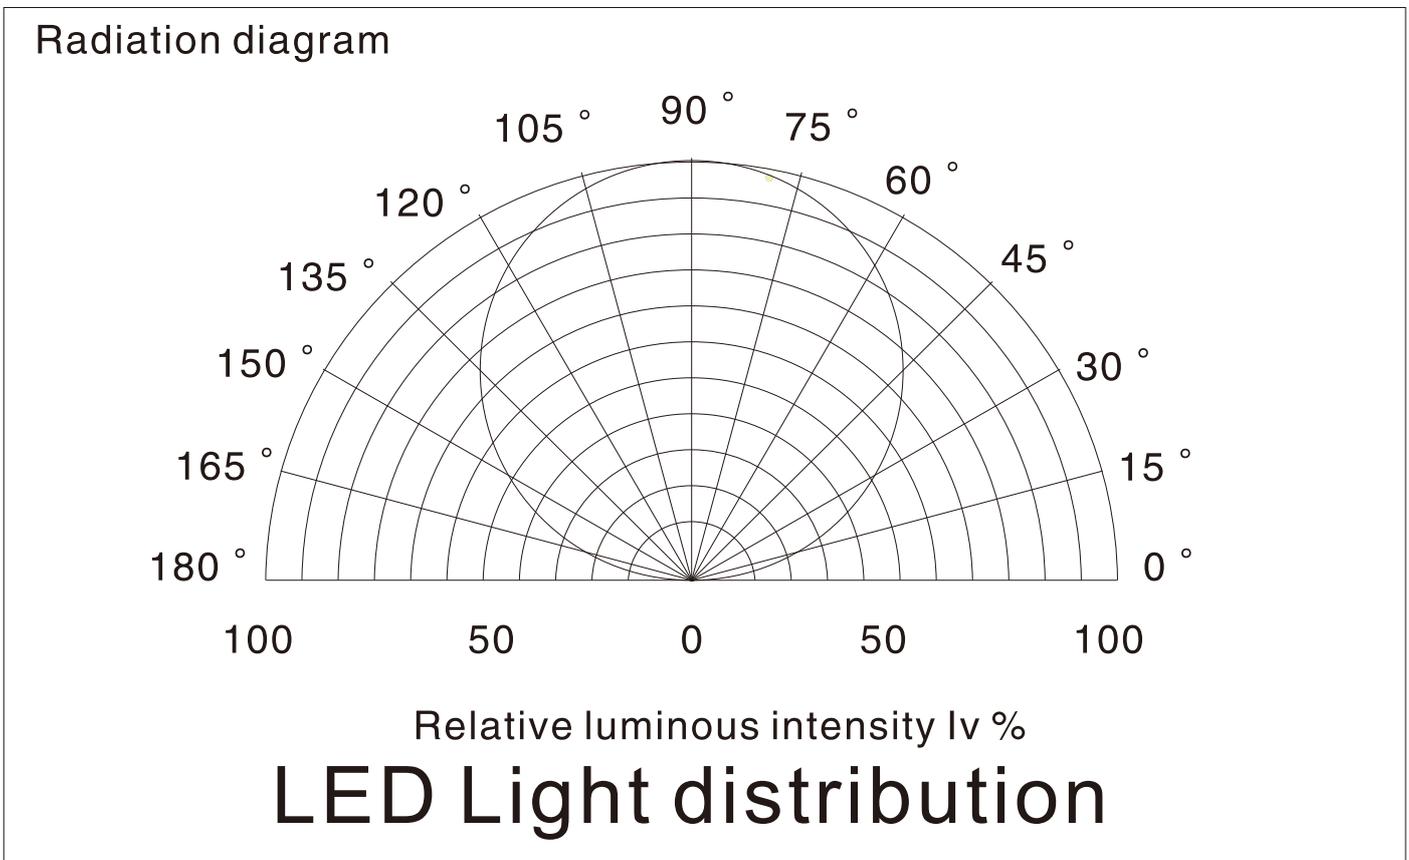


Color Spectrum (CRI80)

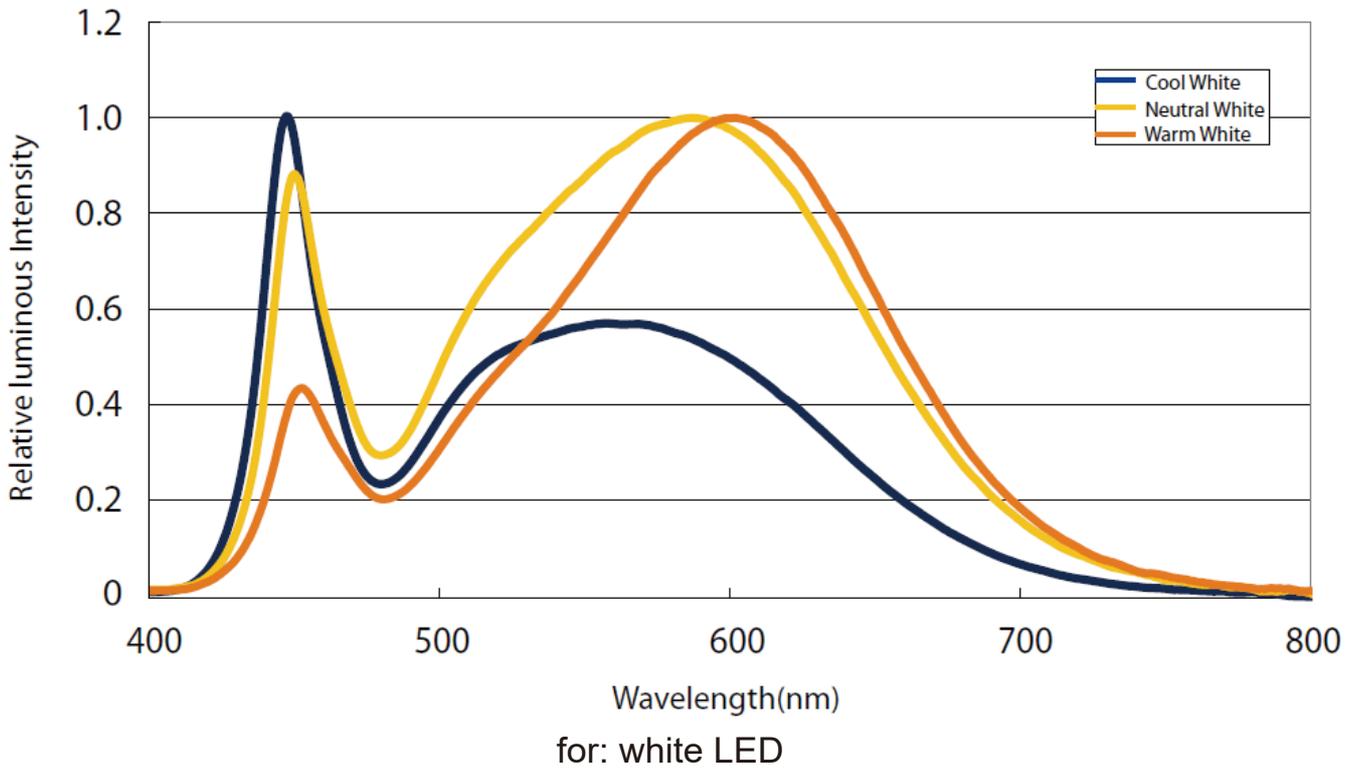


How to connect flexible strip

Below shows you how to connect the flexible strip to power supplies.

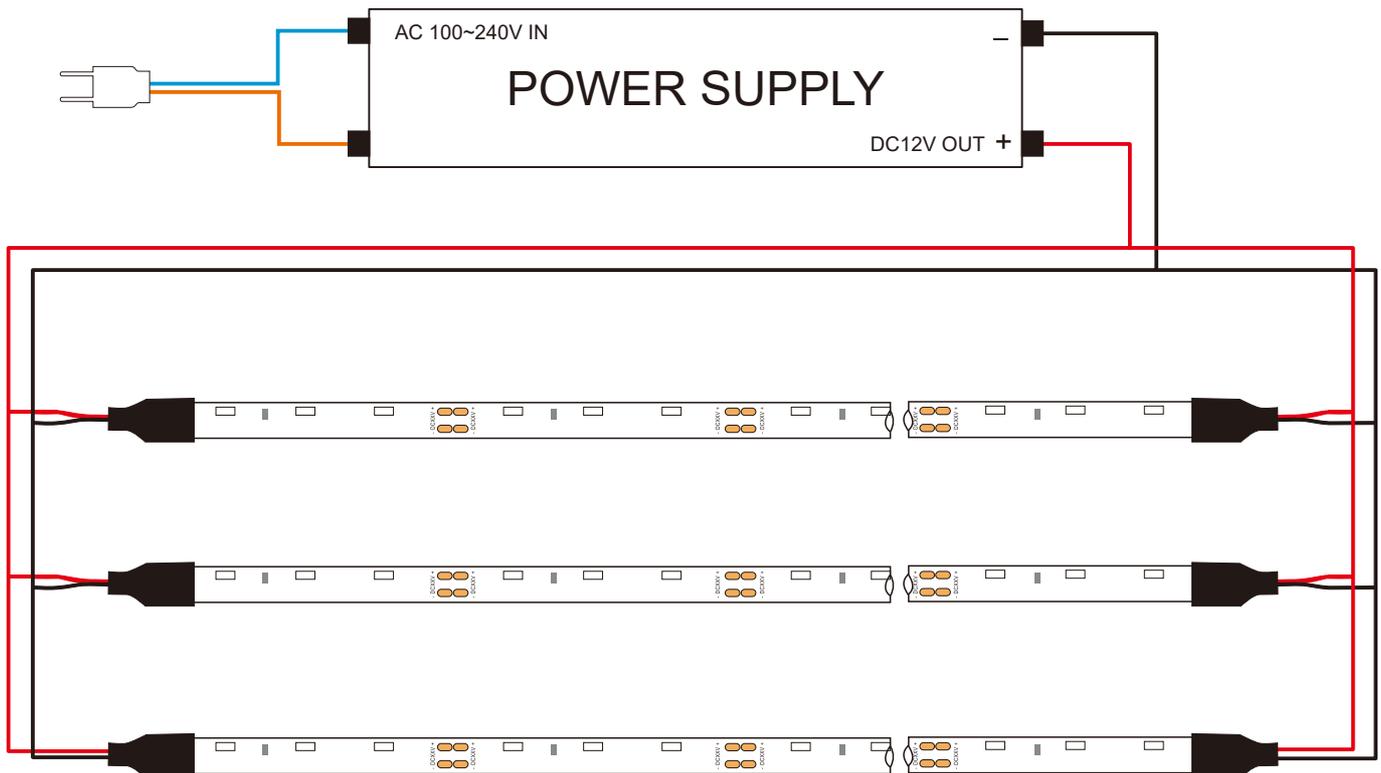


Lux Diagram

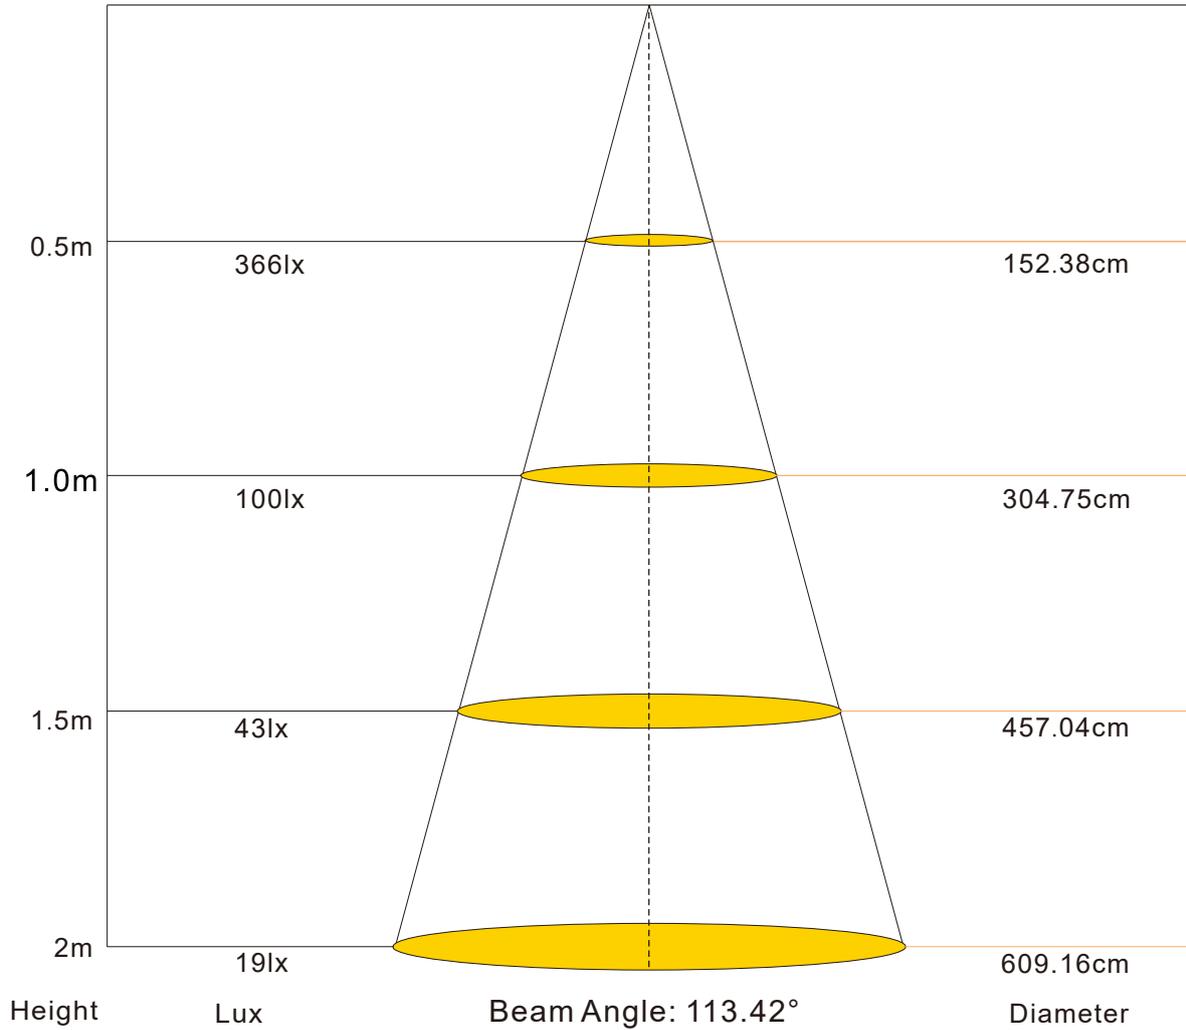


335FW-60LED/M 2700K

Lux Diagram

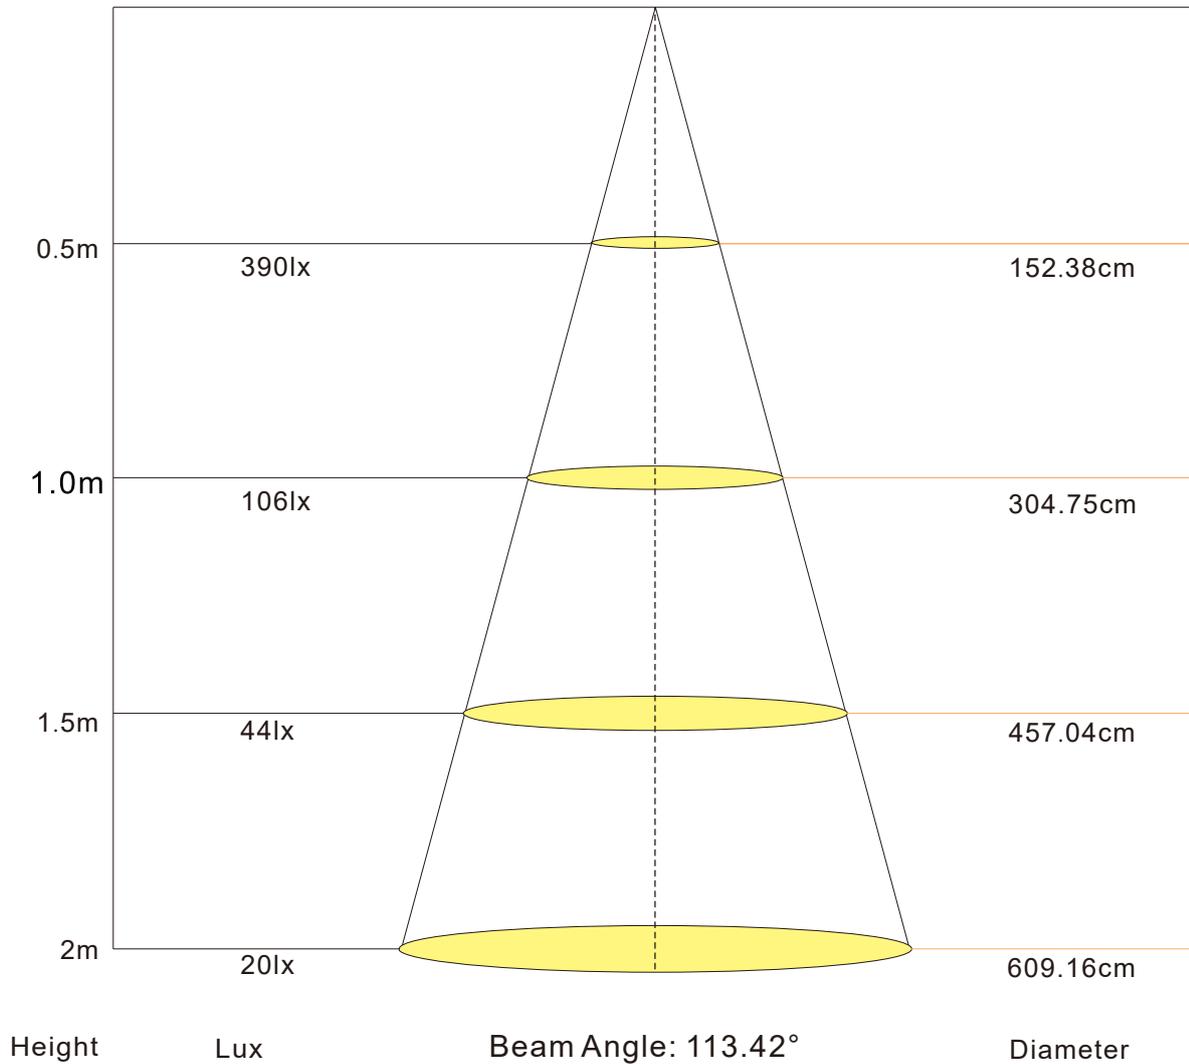


335FW-60LED/M 3200K

Lux Diagram

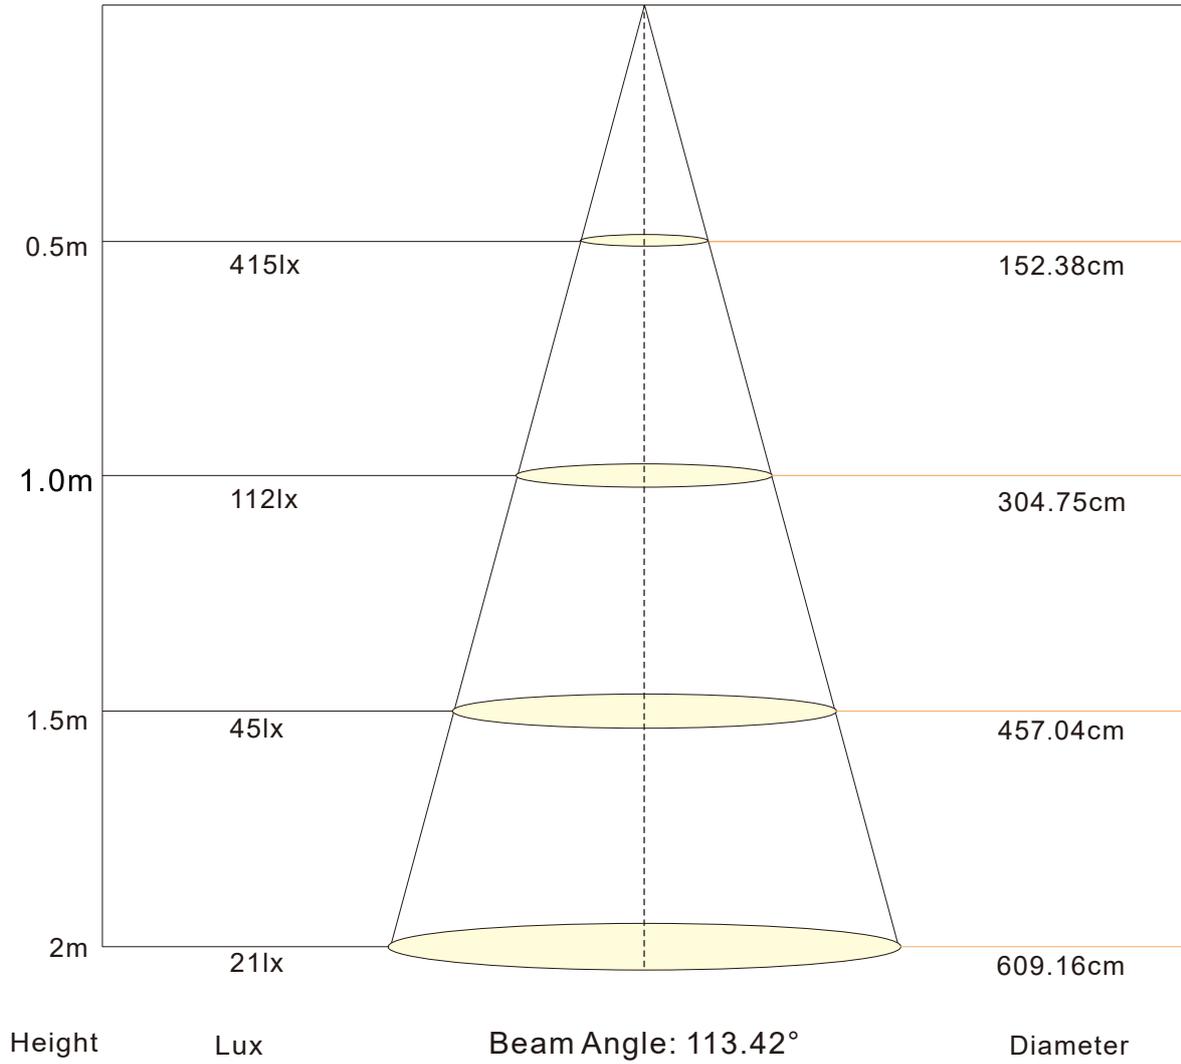

335FW-60LED/M 4200K

Lux Diagram

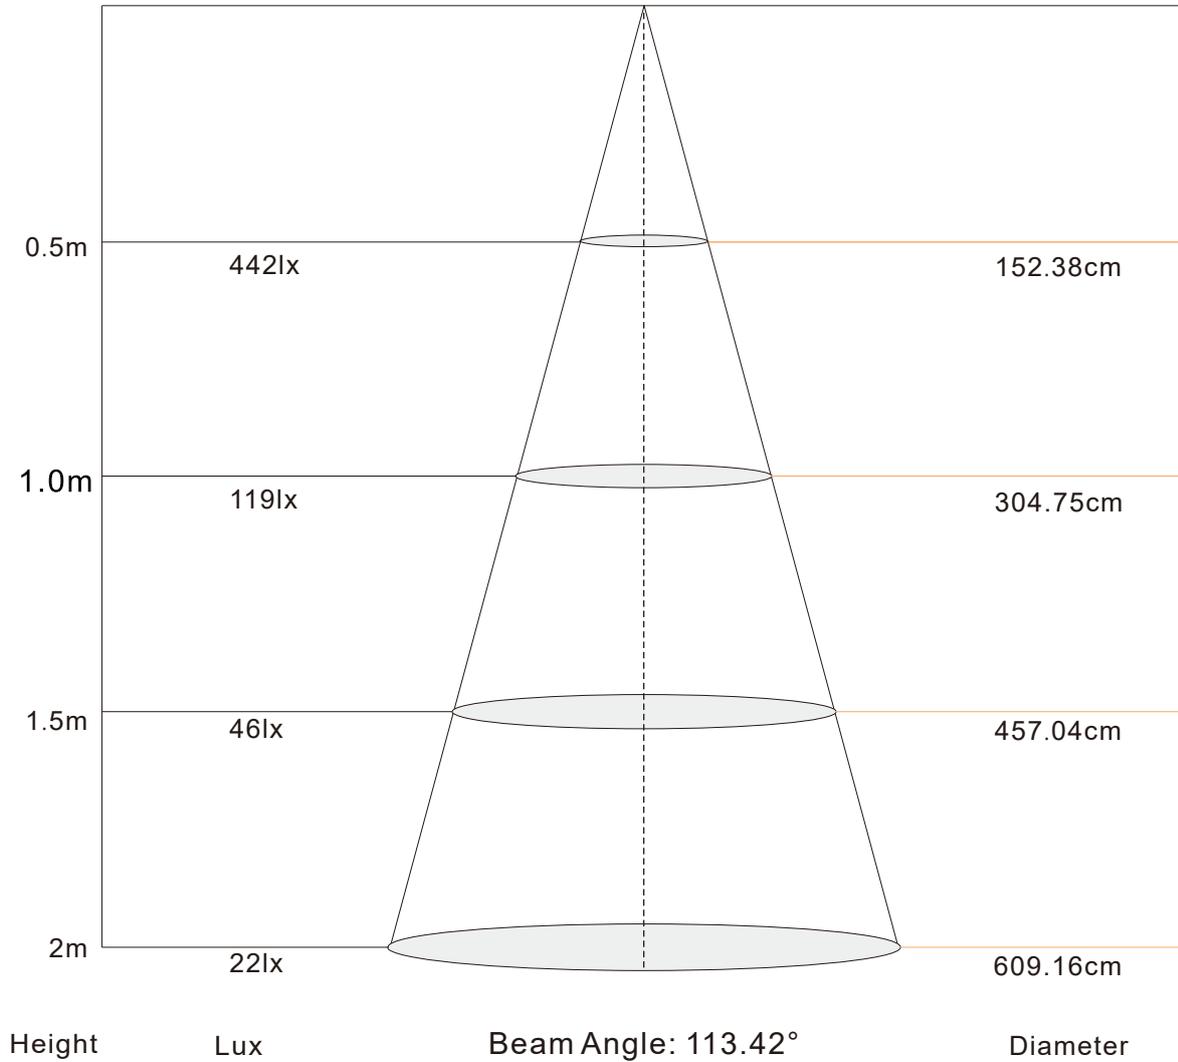

335FW-60LED/M 6200K

Package:



1 reel/bag



25 bags/Inner Box



Inner box
size:25x26x31cm



50 Bags/Outer Box







Outer box
size:34x52x27cm


Package: 5 meter strip in one reel, one reel in one anti-static bag, 25 bags put into one inner box, 2 inner box put into one carton.

! Cautions:

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:

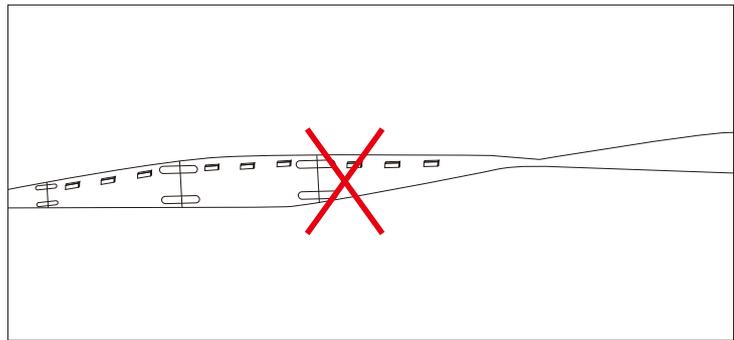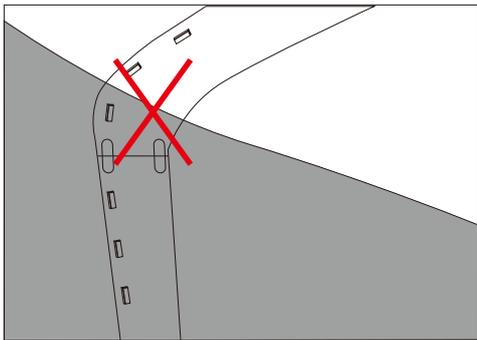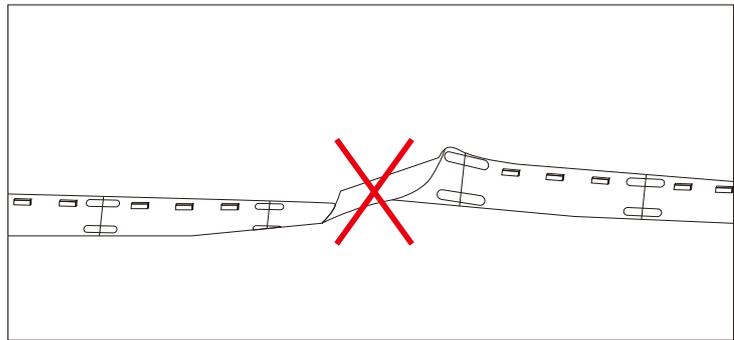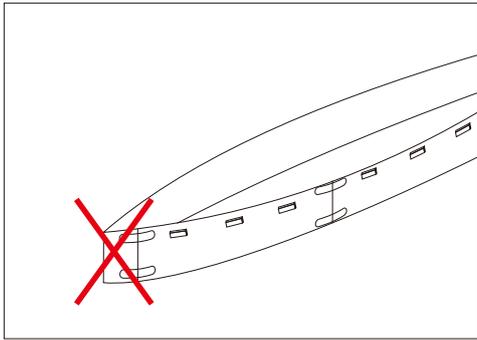

Distortion(Wrong)

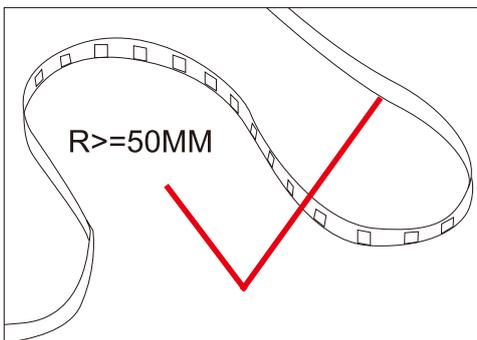

Bend (Right)