



# FCOB320-24V-M8

## FLEXIBLE STRIP INTRODUCTION

Product specification


Lister: 精奇

Assessor: 张明

Approver: 李春

# Features:

- . New Flip Chip On Board Flexible LED Strip, 320 chips per meter.
- Ideal for LED lighting application to avoid multi-shadows.
- Higher heat conductivity for better thermal management.
- Provide variable and innovative array LED layout designs and combinations.
- Available in 24V DC maximum.
- Very bright & low power consumption.
- Operating temperature: -20°C to +50°C.
- Long life span LED lights, more than 50,000 hours.
- Adhesive back, peel & stick!
- All available controller or dimmers.
- Non-waterproof, IP20<sup>1</sup>.




# Applications:

Ideal for sign letters and channel letters, concealed lights, room lighting, equipment.

# Assembly drawing :


## Top View

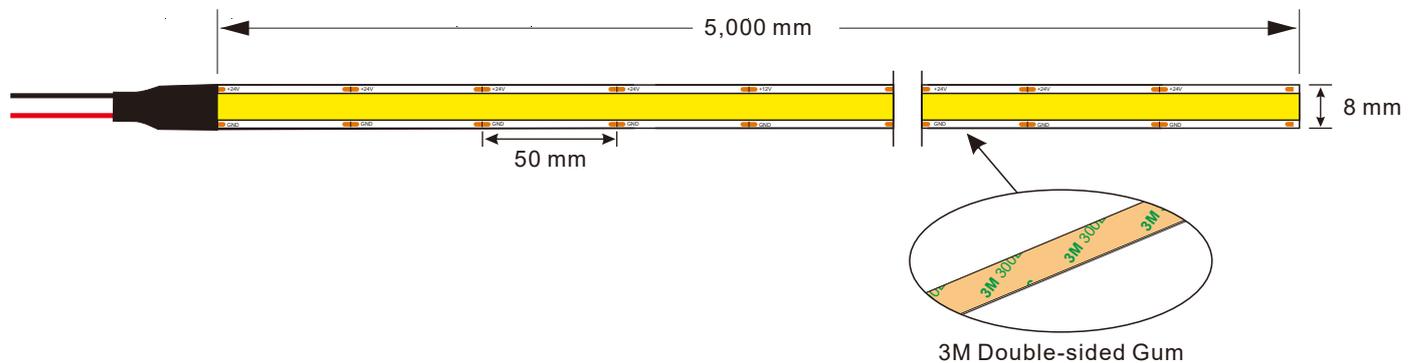


## Section



Dropper Series: SUR-FCOB320-24V						
Part number	Color	LED QTY/meter	Lumen/meter	Voltage	Power/meter	Packing means
FCOB320-24V	WW <input checked="" type="checkbox"/>	320	550	DC24V	4.5W	5 meters/reel
	NW <input type="checkbox"/>		600			
	CW <input type="checkbox"/>		650			

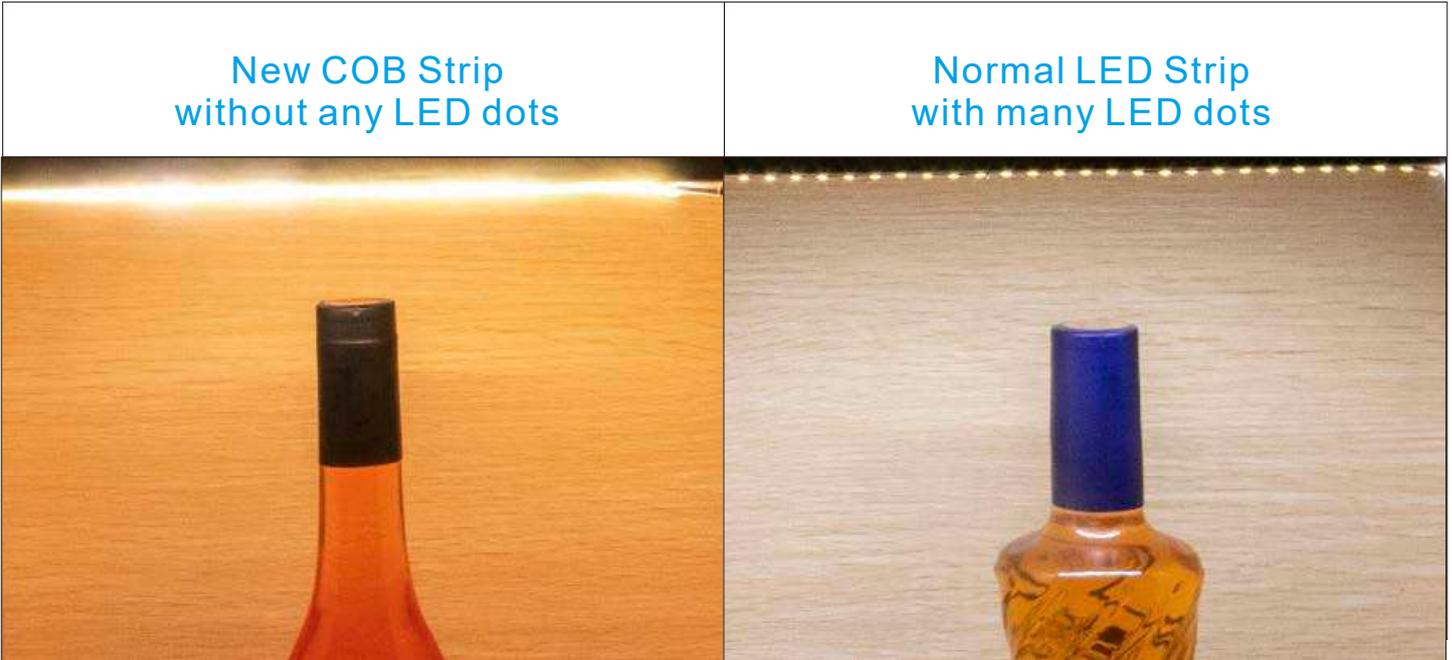


## LED Light distribution

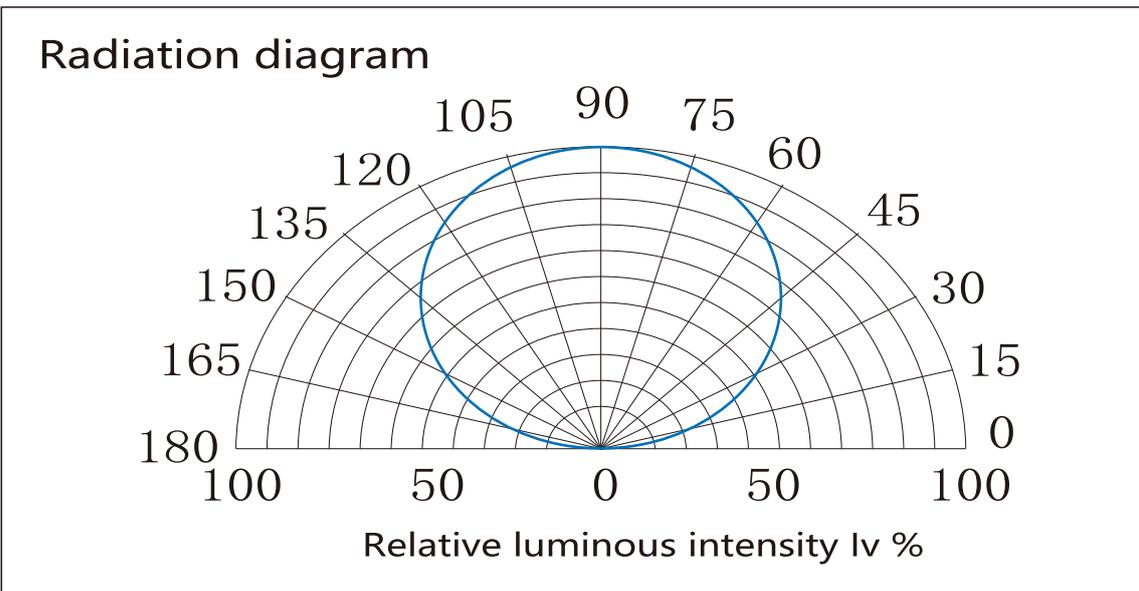

## Color spectrum (CRI80+)

For: white LED

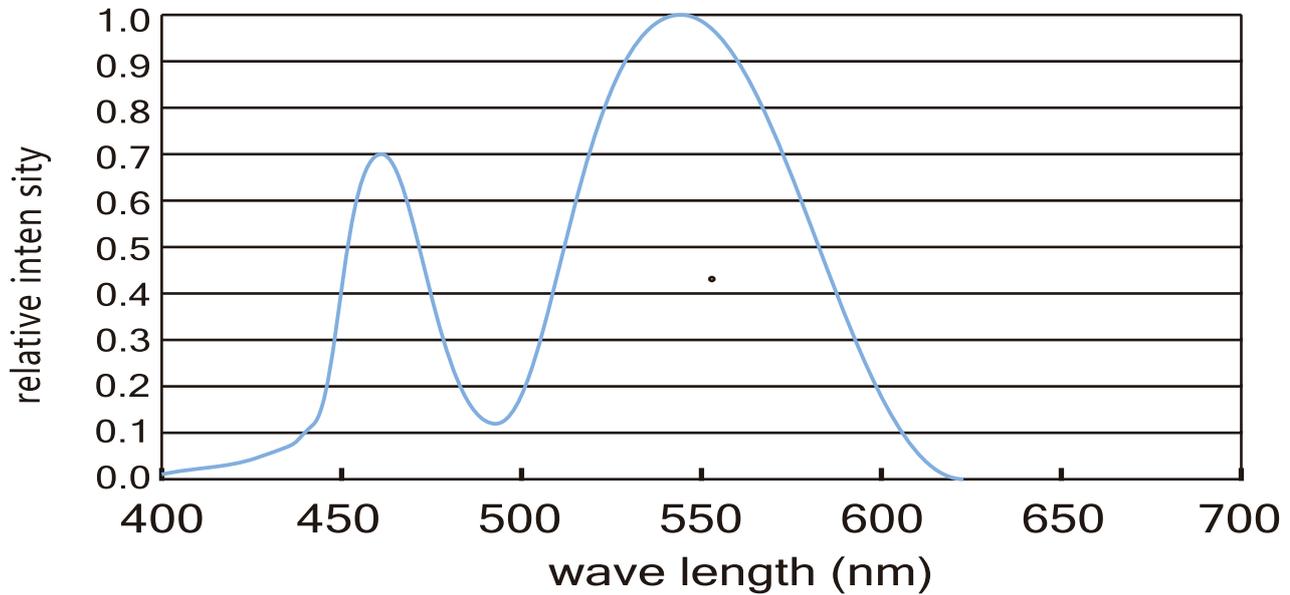

## Package:



5 meters/reel



1 reel/bag



Outer box  
size:34x52x27cm

25 Bags/Inner Box




Outer box  
size:34x52x27cm

50 Bags/Outer Box

**Package:** 5 meters strip in one reel, one reel in one anti-static bag, 25 bags put into one carton, 2 inner boxes put into 1 carton .

## How to connect flexible strip:

Below shows you how to connect the flexible strip to power supplies




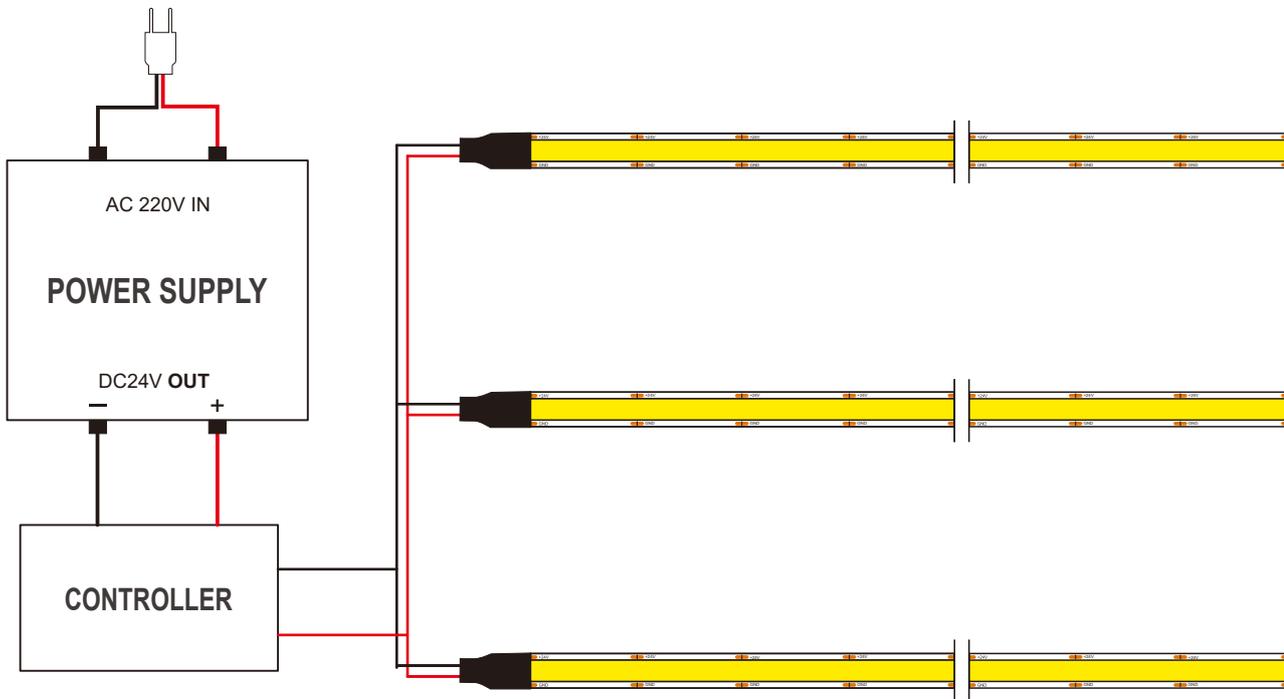


### Note:

- Please note that, the LED strips should not be used in sealed or hot place, to make sure the heat dispersion is good, mount the LED strip in Aluminium Chanel.
- Each flexible strip with a total length of the series can not be more than 5 meters.  
(Recommmed running length: single power supply: 3m max for 12V, 5m max for 24V. Double power supply: 6m max for 12V, 10m for 24V)
- Flexible strip with all of the total power can not exceed 80 %of the power switching power supply.

 **Cautions:**

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:

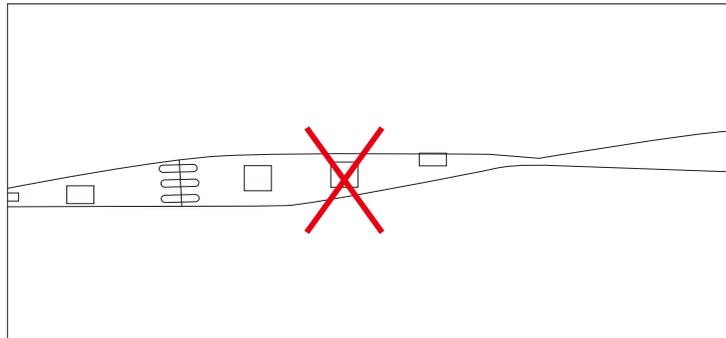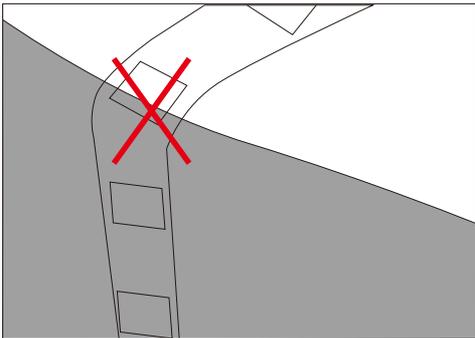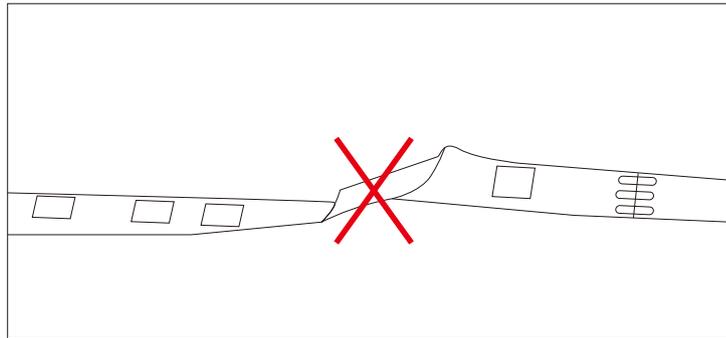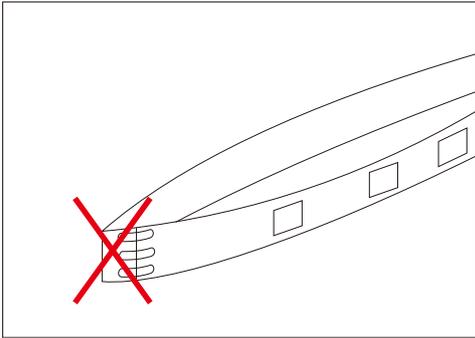**Distortion(Wrong)****Bend (Right)**