



www.surmountor.com

+86-755-27926119/27926326 sales@surmountor.com

www.surmountor.com / www.sur-led.com / www.ledstrip.cc

4/F, No.2 Factory Building, Dayang, No.4 Tangwei Industrial Avenue,
Fuyong Street, Bao'an, Shenzhen, China

2026

Neon led strip light/ 360° Round silicone neon light

Rectangle silicone neon light

SILICONE NEON LIGHT

► ONE-STOP SERVICE








TABLE OF CONTENTS

About surmountor

Company overview	01-02
Main markets distribution	03-04

Neon silicone tube

Neon silicone tube sizes	05-08
Black Neon Strip Light	09-12
Recessed Neon	13-20
3D Bend	21-26
Free cut & Free solder Neon	27-38
Side Bend	39-54
Top Bend	55-74
360° Neon	75-84
Rectangle Neon Silicone Tube	85-96
Rectangle Neon Silicone Cover	97-102
SST Flexble Wall Washing Lamp	103-108

ABOUT OUR COMPANY



We have an excellent team!

Our energetic and creative sales team understand customers' demands deeply and solve problems promptly. Every customer will be concerned and respected seriously, patiently, responsibly from enquiry-design-sampling-order-production-export-after sales service. Based on all our efforts, we attained great achievements and progress in the past 10 years, and also help our customers to expand their markets by constantly developing new products.

Our strength and pursuit!

Our main strength is equipped with professional engineers, can provide customers with customized lighting solutions and win the market with clients together. Our goal is to build long term win-win relationship with our customers.



We are professional manufacturer!

Surmountor Lighting Co.,LTD was founded in 2011, and has been diligently devoted in the LED lighting industry. With over 10 years experience, We are specialized in LED Neon Flex, Linear Lighting, LED Flexible Strip, LED Sensor Switches and LED Aluminum Profile, . And our products are widely used in outdoor or indoor lighting, hotel lighting, office lighting, shop lighting, kitchen lighting, etc.

Our factory is over 8000m², with more than 100 employees. What's more, with the aim to be continuously competitive, our company is equipped with 10 professional R&D staffs. Our factory production monthly capacity reach more than 120,000 meters of flexible LED strips, 150,000 meters LED profiles, 100,000 pieces sensor switches, 36000 meters of neon light and so on.

One-stop production and Continuous innovation!

With wide range led products line, we concentrate on offering one stop and one package service. To fulfil our worldwide partners different needs, our R&D departments always commit to continuously creating and innovating new products. In 2017, we developed LED Neon Lights. All of our neon flex products are of matte-finished texture, which helps feeling elegant and of higher quality level.



We have ISO quality control System!

Our LED products are quality oriented and have passed a series of certifications, including CE, RoHS, UL, ISO9001:2015 management system, etc. We are committed to continuously providing our customers with high performance and reliable quality products. By offering competitive price, stable quality, timely delivery and good service, we gained good reputation among our customers all over the world, such as Europe, North America, Latin America, Australia, Middle East and Southeast Asia



MAIN MARKETS DISTRIBUTION

Based on excellent quality and dedicated service, Surmountor is highly recognized and favored by foreign customers, enjoys a high reputation and fame in overseas markets, and has become one of the global consumers' reliable led brands. Products are exported to Europe, North America, Latin America, Australia, Middle East and more than 50 countries.




Cooperation
Partners
> 500


NEON SILICONE TUBE SIZES

- Optimal Performance
- More convenient installation
- More extensive application


Black Neon Strip Light

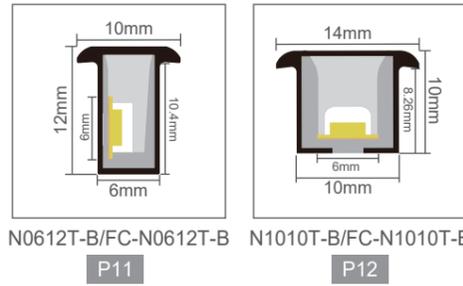


Recessed Neon

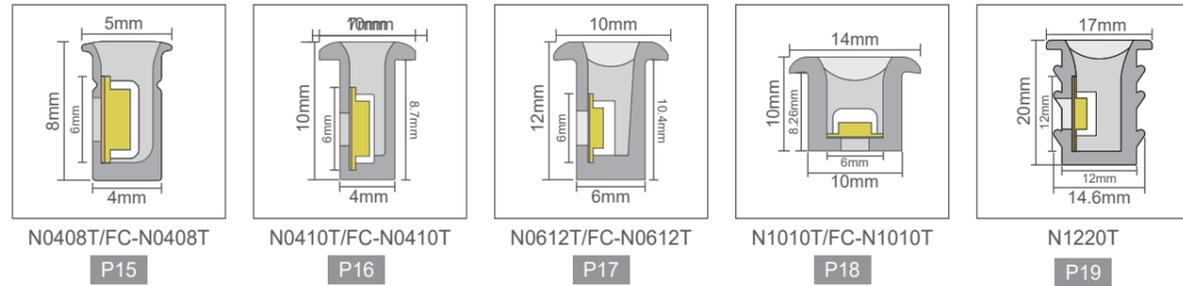


3D Bend

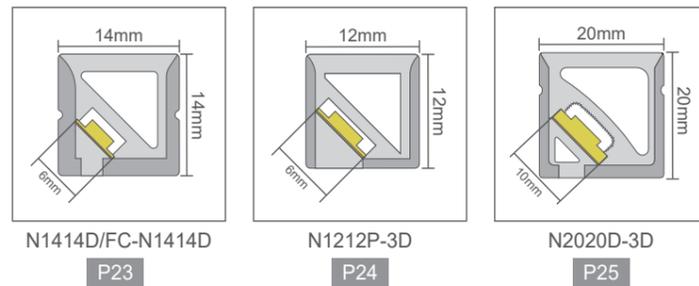


Free cut & Free solder Neon

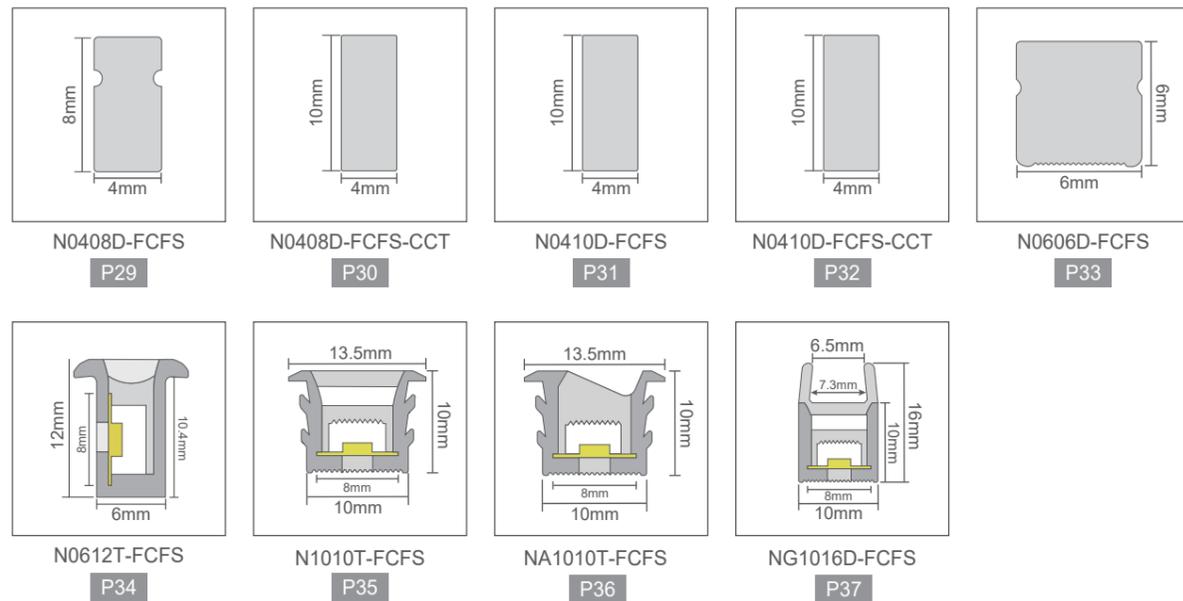


Side Bend

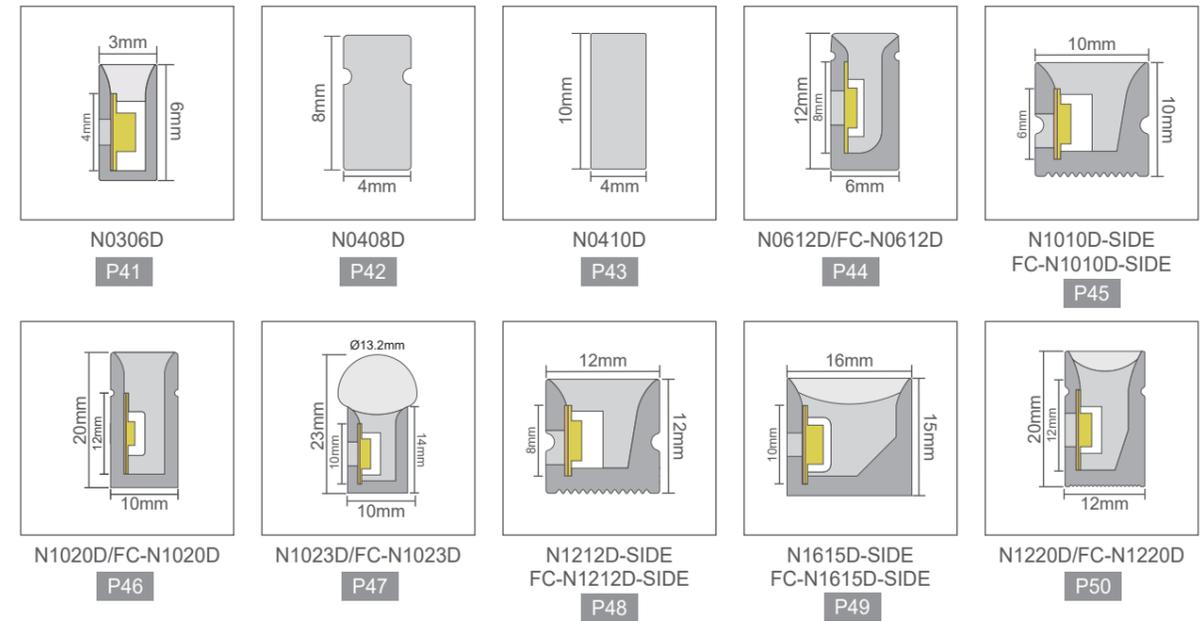


Top Bend

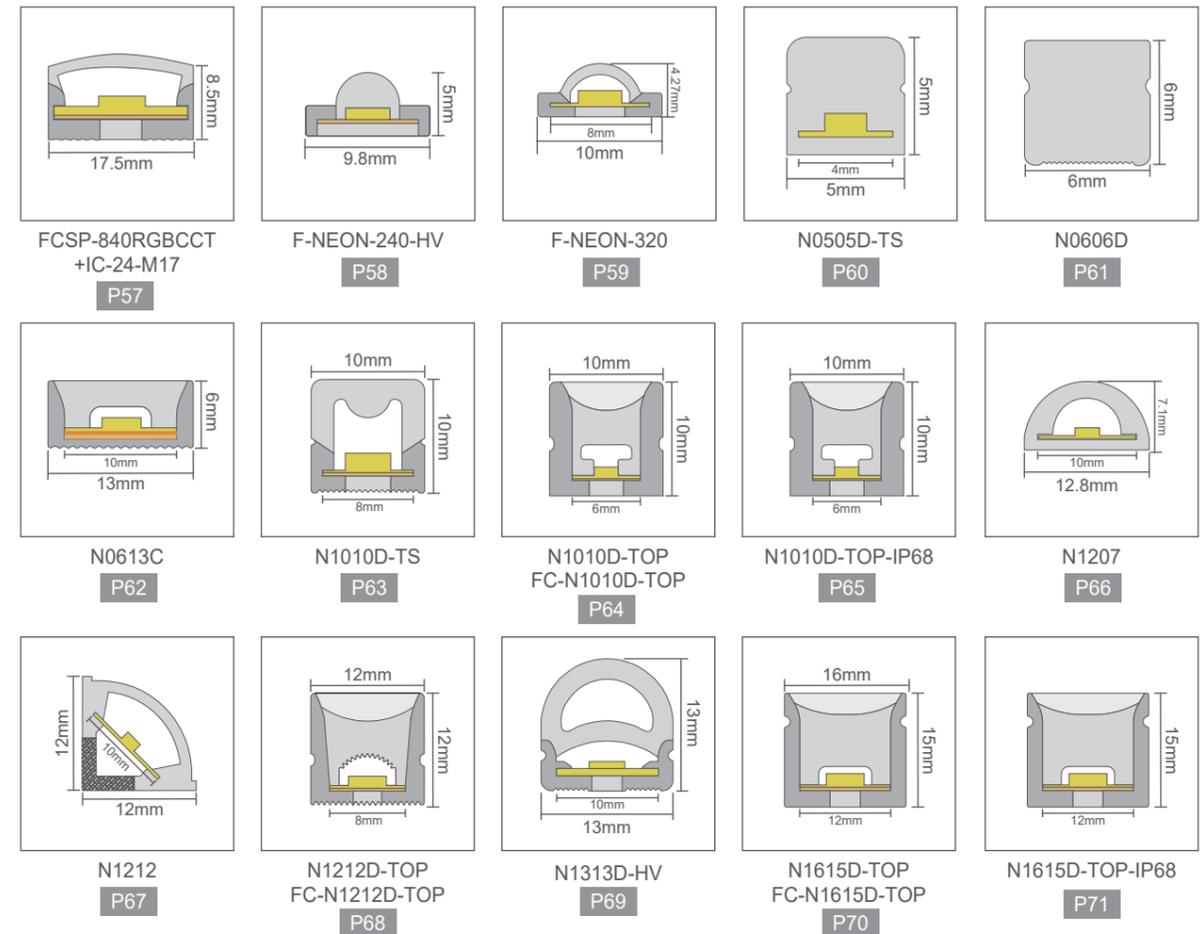


360° Neon




N1615D-TOP-HV
P72




NT1506D
P73




N2018D
P74




ND24D
P77




FND24D
P79




ND14D
P80




ND13
P81




ND16
P81




ND20
P82




ND22
P82




ND26
P83




ND33
P83




ND40
P84




N2010
P87




N2014
P87




N2020
P88




N3020
P88




N5025
P89




N0410B
P89




N0513
P90




N1326
P90




N2515
P91




N0612P
P91




N0816P
P92




N1010P-TOP
P92



N1010P-SIDE
P93




N1020P
P93




N1023P
P94


Rectangle Neon Silicone Cover




N1220P
P94




N1615P
P95




NC1010
P99




NC1212
P99




NC1616
P100




NC2010
P100




NC2014
P101



NC2018
P101



NC2020
P102




NC3020
P102


SST Flexible Wall Washing Lamp



SST1007B-W
P105



SST1208C-W
P106



SST2010A-W
P107



Black Neon Strip Light




N0612T-B / FC-N0612T-B



- Product size: 6*12mm
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

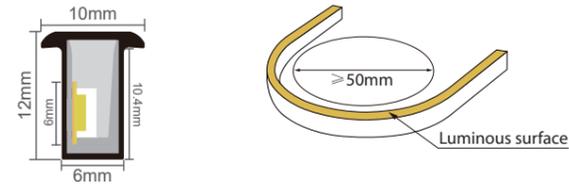

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	91	82	41.67mm	24V	9.6W
	NW	96	86			
	CW	95	86			
WHT	WW	82	74	cut anywhere	24V	9.6W
	NW	87	78			
	CW	85	77			




N1010T-B / FC-N1010T-B



- Product size: 10*10mm
- N.W.(G/M): 120g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

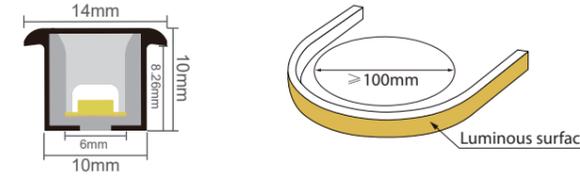


Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	120	108	41.67mm	24V	9.6W
	NW	127	114			
	CW	125	113			
WHT	WW	109	98	cut anywhere	24V	9.6W
	NW	114	103			
	CW	112	101			

Recommended Accessories

Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



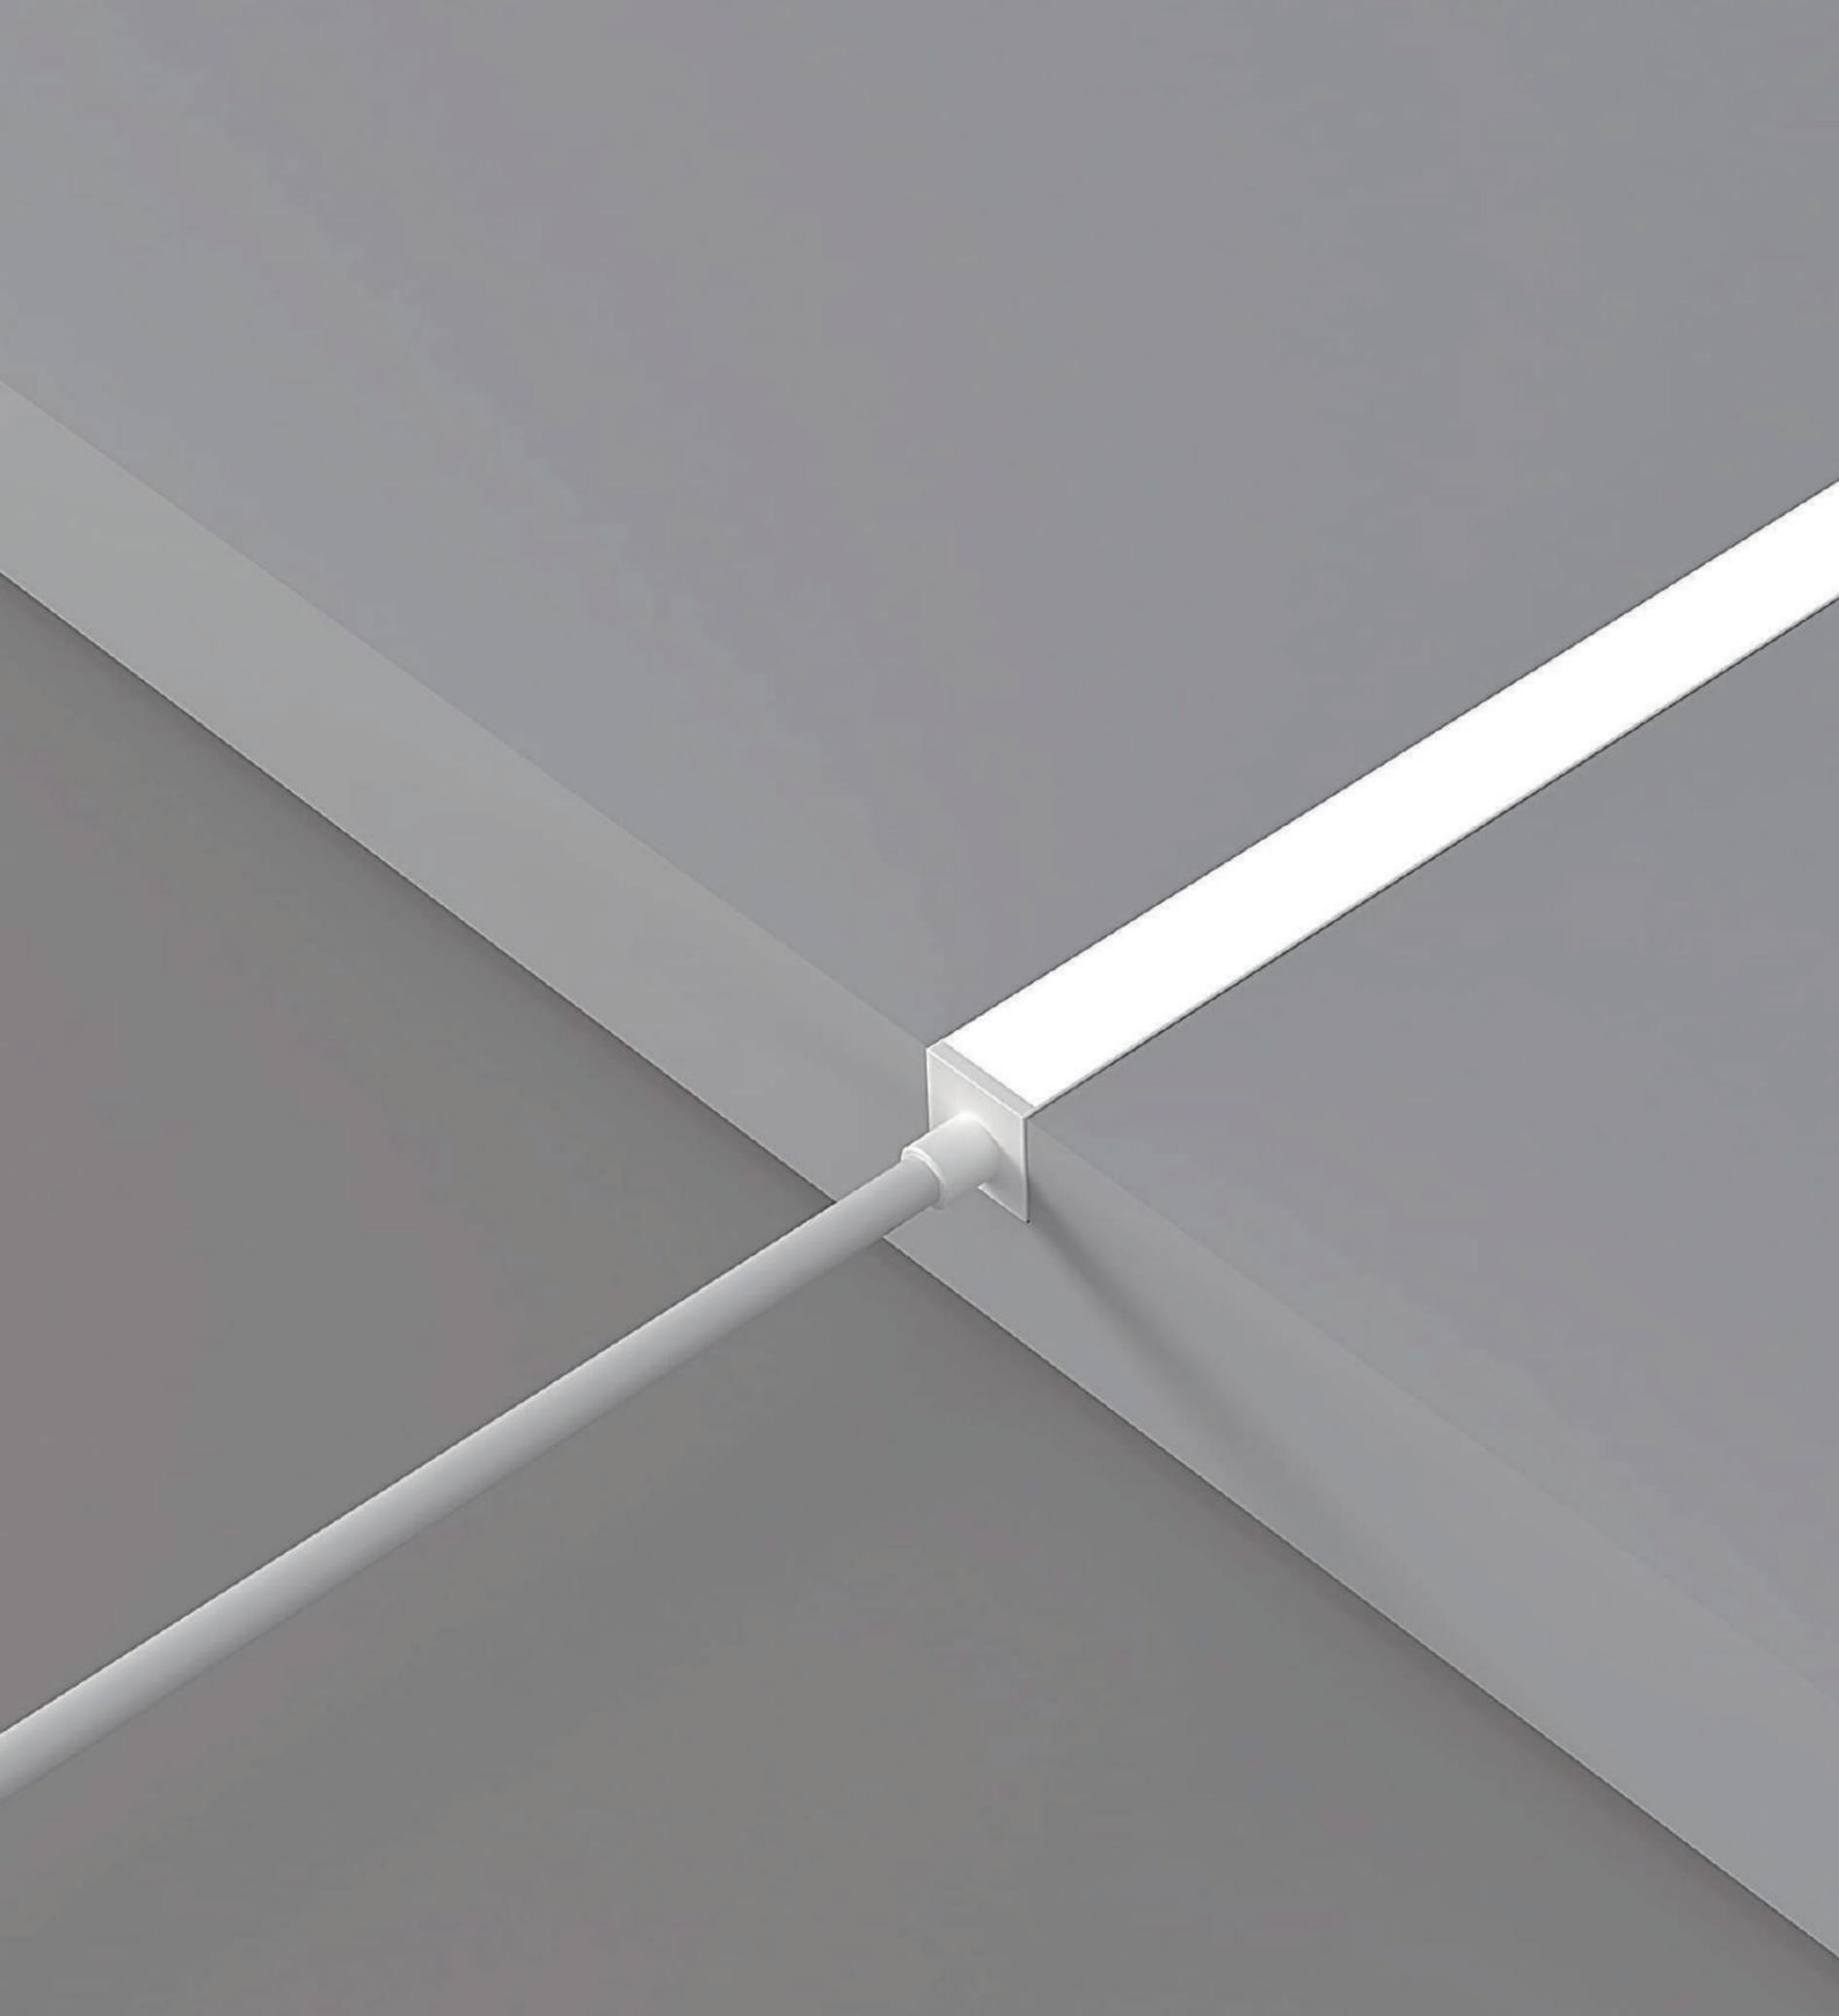


Recessed Neon



N0408T / FC-N0408T




- Product size: 4*8mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

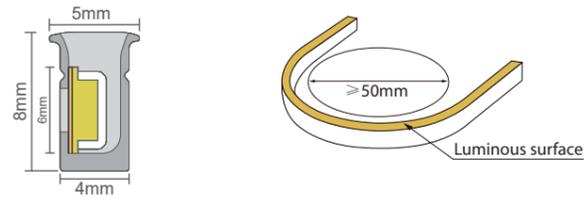


Recommend LED strip parameters


Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	276	248	41.67mm	24V	9.6W
	NW	292	263			
	CW	287	258			
WHT	WW	250	225	cut anywhere	24V	9.6W
	NW	263	237			
	CW	258	232			

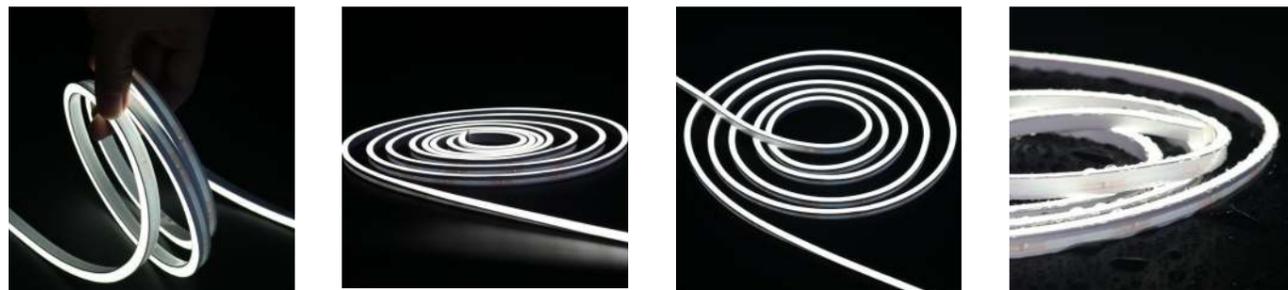

N0410T

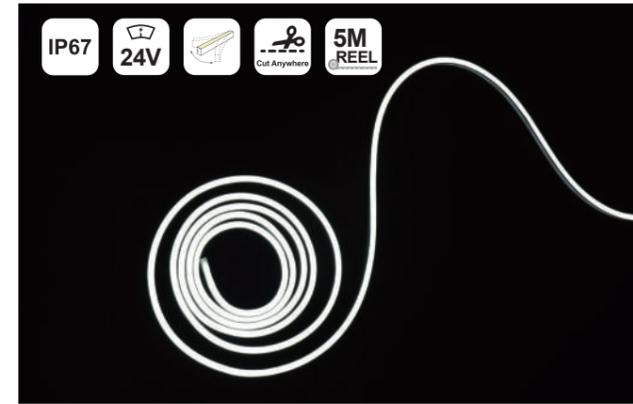

- Product size: 4*10mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

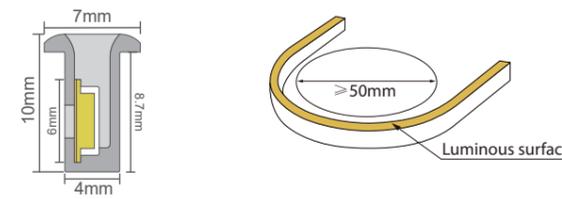

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	276	248	41.67mm	24V	9.6W
	NW	292	263			
	CW	287	258			
WHT	WW	250	225	cut anywhere	24V	9.6W
	NW	263	237			
	CW	258	232			

Recommended Accessories

Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	




N0612T / FC-N0612T




- Product size: 6*12mm
- N.W.(G/M): 110g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

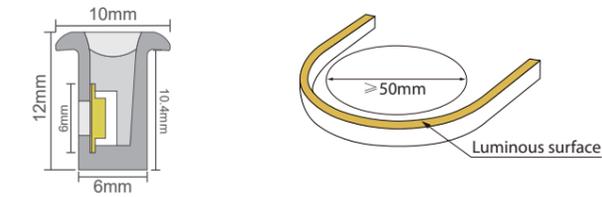

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	468	421	41.67mm	24V	9.6W
	NW	494	445			
	CW	487	438			
WHT	WW	423	381	cut anywhere	24V	9.6W
	NW	446	401			
	CW	438	394			

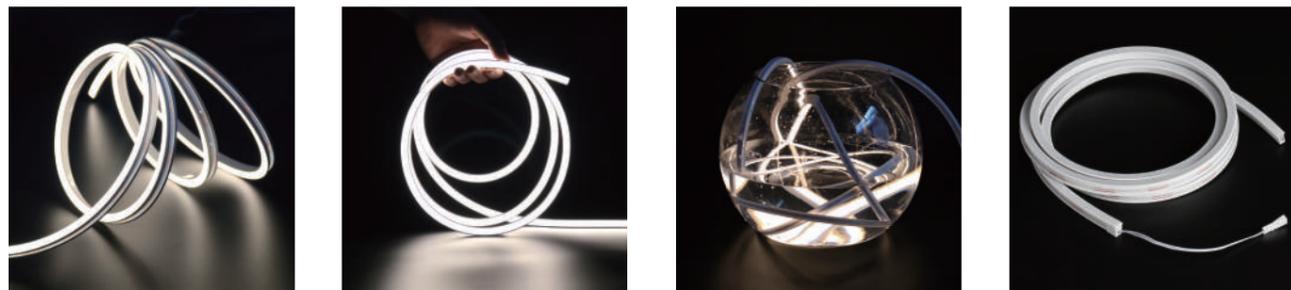


N1010T / FC-N1010T



- Product size: 10*10mm
- N.W.(G/M): 125g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

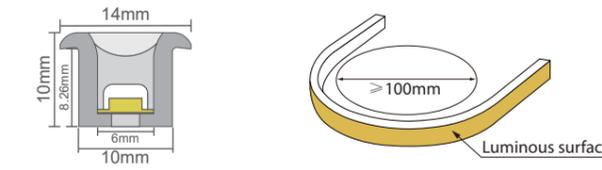

Recommend LED strip parameters


Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	780	702	41.67mm	24V	9.6W
	NW	824	742			
	CW	811	730			
WHT	WW	705	635	cut anywhere	24V	9.6W
	NW	743	669			
	CW	730	657			

Recommended Accessories


Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



N1220T / FC-N1220T

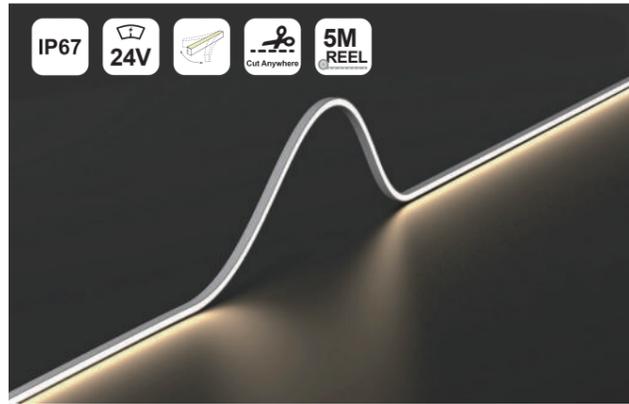

- Product size: 12*20mm
- N.W.(G/M): 310g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

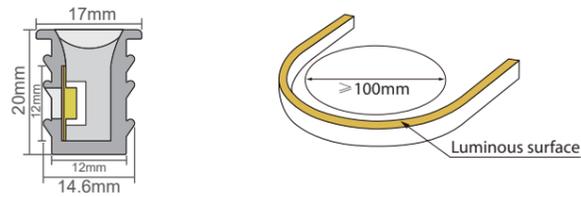

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	611	550	50mm	24V	14.4W
	NW	968	581			
	CW	634	571			
WHT	WW	878	790	50mm	24V	14.4W
	NW	911	820			
	CW	956	860			
TW	WW	268	241	50mm	24V	14.4W
	CW	274	247			
WHT	WW	651	586	cut anywhere	24V	14.4W
	NW	685	617			
	CW	674	607			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	52	50mm	24V	14.4W
	RGB G	154			
	RGB B	33			
RGBW	RGBW R	42	62.5mm	24V	15W
	RGBW G	117			
	RGBW B	23			
	RGBW WW	119			
	RGBW NW	125			
SPIRGB	SPI R	54	71.43mm	24V	15W
	SPI G	160			
	SPI B	34			
DMX512	DMX512 R	59	125mm	24V	16.8W
	DMX512 G	117			
	DMX512 B	38			
	DMX512 WW	149			
	DMX512 NW	156			
	DMX512 CW	153			

Recommended Accessories

Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	





3D Bend




N1414D / FC-N1414D



- Product size: 14*14mm
- N.W.(G/M): 200g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

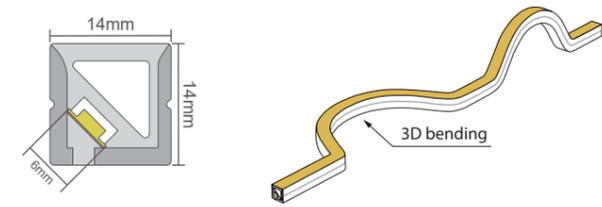

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	600	540	41.67mm	24V	9.6W
	NW	634	571			
	CW	624	562			
WHT	WW	542	488	cut anywhere	24V	9.6W
	NW	571	514			
	CW	562	506			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	




N1212P-3D



- Product size: 12*12mm
- N.W.(G/M): 195g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

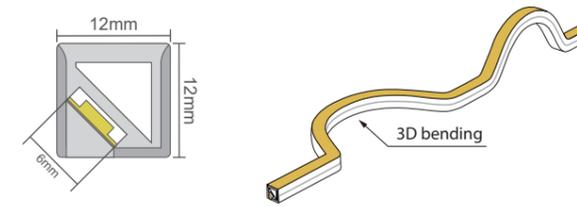


Recommend LED strip parameters



Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	440	50mm	24V	9.6W
	NW	485			
	CW	510			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

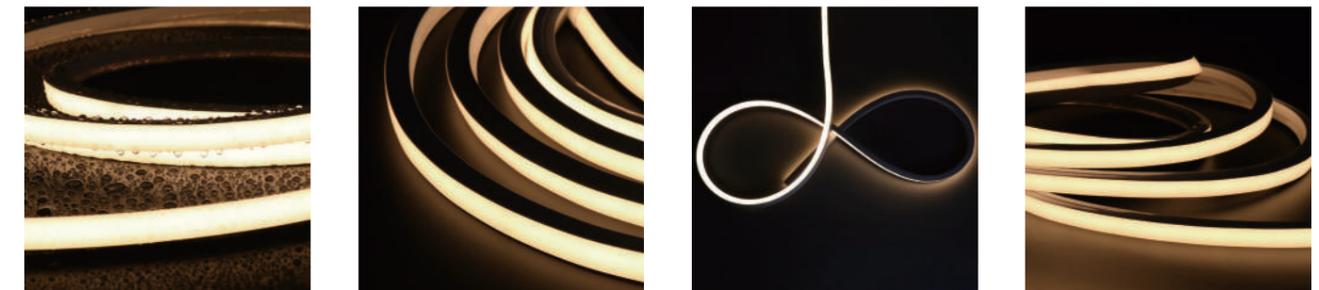

N2020D-3D / FC-N2020D-3D

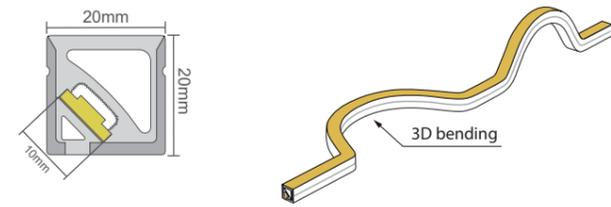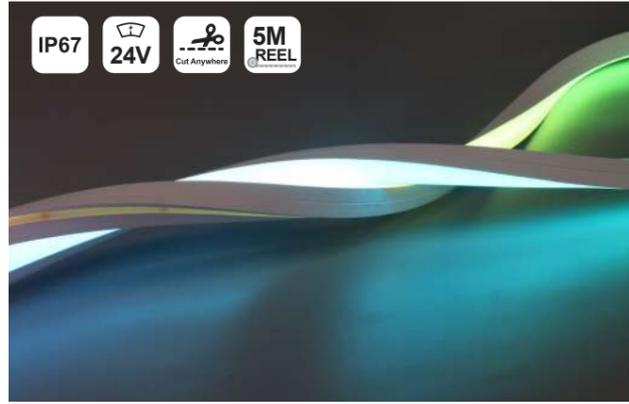

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	916	824	50mm	24V	14.4W
	NW	968	871			
	CW	950	855			
WHT	WW	1317	1185	50mm	24V	14.4W
	NW	1367	1230			
	CW	1444	1300			
TW	WW	643	579	50mm	24V	14.4W
	CW	389	350			
WHT	WW	976	878	cut anywhere	24V	14.4W
	NW	1028	925			
	CW	1011	910			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	78	50mm	24V	14.4W
	RGB G	230			
	RGB B	49			
RGBW	RGBW R	63	62.5mm	24V	15W
	RGBW G	176			
	RGBW B	34			
	RGBW WW	178			
	RGBW NW	187			
SPIRGB	SPI R	81	71.43mm	24V	15W
	SPI G	240			
	SPI B	51			

- Product size: 20*20mm
- N.W.(G/M): 350g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	





Free cut & Free solder Neon




N0408D-FCFS



- Product size: 4*8mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: Direct Plug-in Design (No Soldering Required)
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

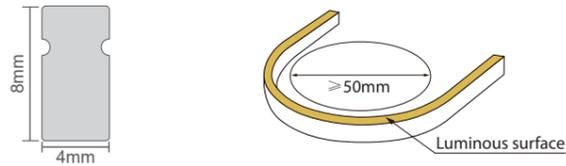

Recommend LED strip parameters

Series	CCT	Lumen/M	CRI	Unit cut	Voltage	Power/M
WHT	WW	247	90	cut anywhere	24V	9.6W
	NW	274				
	CW	261				




N0408D-FCFS-CCT



- Product size: 4*8mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: Direct Plug-in Design (No Soldering Required)
- Cutting of any length.
- Adjustable from 3000K to 4000K via compatible controller.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW

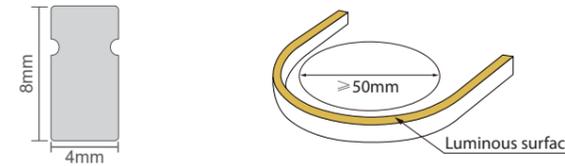


Recommend LED strip parameters

Series	CCT	Lumen/M	CRI	Unit cut	Voltage	Power/M
TW	3000K	270	90	cut anywhere	24V	9.6W+9.6W
	4000K	280				

Recommended Accessories

Name:	Solderless Power Cable	
Model:	FC-N0408D-AP	
Standard Length:	2m	
Connector:	L813 Male	

Name:	6-Way Junction Box	
Model:	L9806P	
Cable Length:	16 cm	
Connector:	Dual-direction L815	

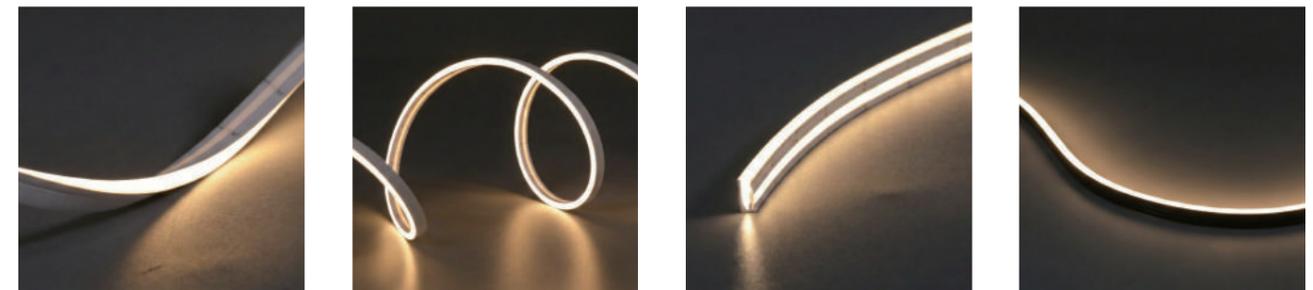


N0410D-FCFS



- Product size: 4*10mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: Direct Plug-in Design (No Soldering Required)
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

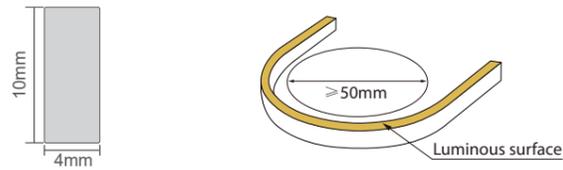

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	250	225	cut anywhere	24V	9.6W
	NW	263	237			
	CW	258	232			




N0410D-FCFS-CCT



- Product size: 4*10mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: Direct Plug-in Design (No Soldering Required)
- Cutting of any length.
- Adjustable from 3000K to 4000K via compatible controller.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW

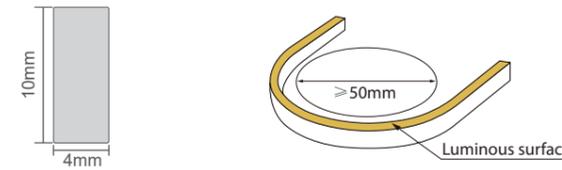


Recommend LED strip parameters

Series	CCT	Lumen/M	CRI	Unit cut	Voltage	Power/M
TW	3000K	230	90	cut anywhere	24V	9.6W+9.6W
	4000K	240				

Recommended Accessories

Name:	Solderless Power Cable	
Model:	FC-N0410D-AP	
Standard Length:	2m	
Connector:	L813 Male	

Name:	6-Way Junction Box	
Model:	L9806P	
Cable Length:	16 cm	
Connector:	Dual-direction L815	

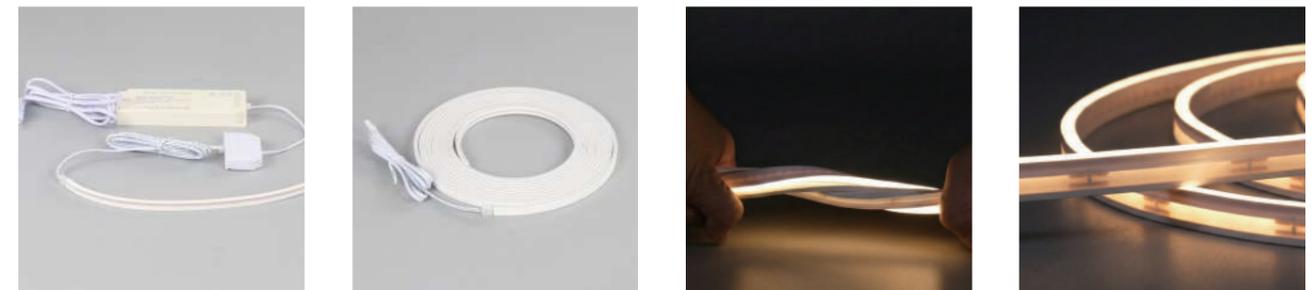


N0606D-FCFS



- Product size: 6*6mm
- N.W.(G/M): 90g
- Material: Silicone
- Length: 3M/reel, Customized
- Cable output: Direct Plug-in Design (No Soldering Required)
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

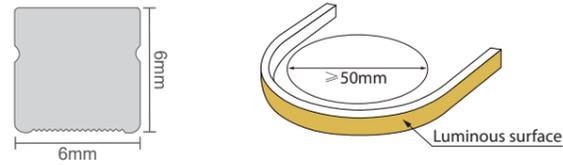


Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	826	749	cut anywhere	24V	9.6W
	NW	864	787			
	CW	854	768			

Recommended Accessories

Name: Solderless Power Cable
 Model: FC-N0606D-AP
 Standard Length: 2m
 Connector: L813 Male

Name: Double-Ended Solderless Plug
 Model: FC-N0606D-BP

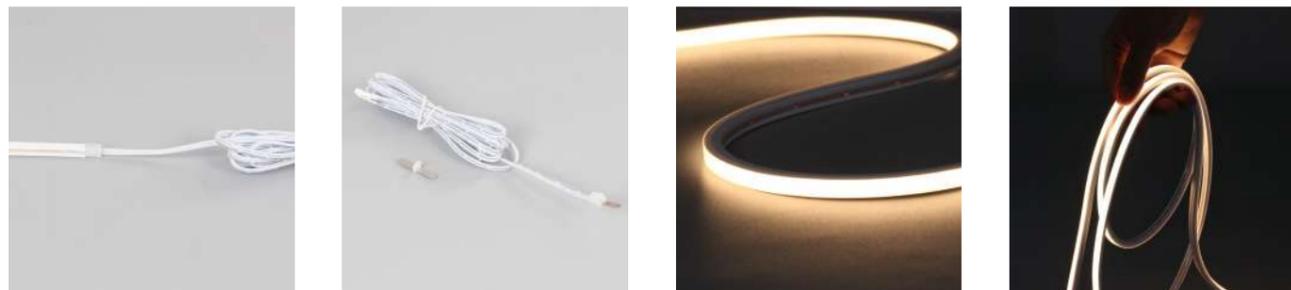


N0612T-FCFS



- Product size: 6*12mm
- N.W.(G/M): 130g
- Material: Silicone
- Length: 5M/reel, Customized
- Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

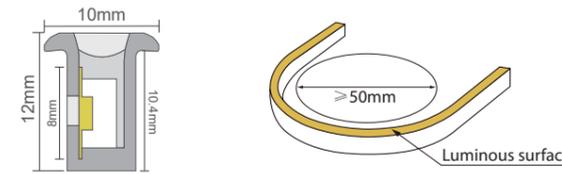

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	385	346	cut anywhere	24V	9.6W
	NW	403	362			
	CW	397	357			

Recommended Accessories

Cable output Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)




N1010T-FCFS



IP20 24V Cut Anywhere 5M REEL

- Product size: 10*10mm
- N.W.(G/M): 130g
- Material: Silicone
- Length: 5M/reel, Customized
- Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

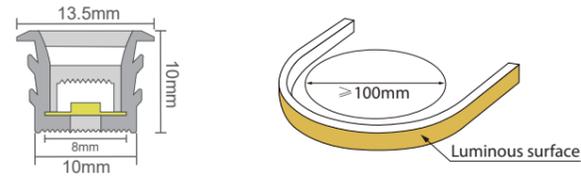


Recommended Accessories

Cable output Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	624	562	cut anywhere	24V	9.6W
	NW	653	588			
	CW	643	580			

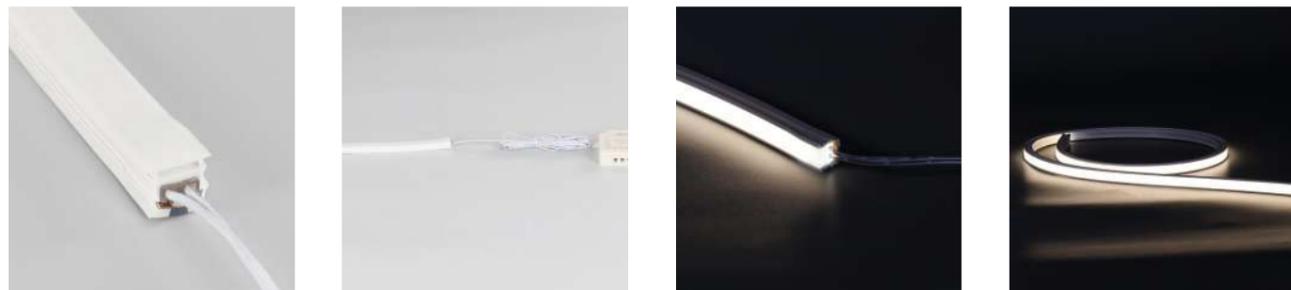

NA1010T-FCFS



IP20 24V Cut Anywhere 5M REEL

- Product size: 10*10mm
- N.W.(G/M): 130g
- Material: Silicone
- Length: 5M/reel, Customized
- Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW



Recommended Accessories

Cable output Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)

Recommend LED strip parameters


Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	572	515	cut anywhere	24V	9.6W
	NW	600	540			
	CW	590	530			



NG1016D-FCFS



- Product size: 10*16mm
- N.W.(G/M): 160g
- Material: Silicone
- Length: 5M/reel, Customized
- Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

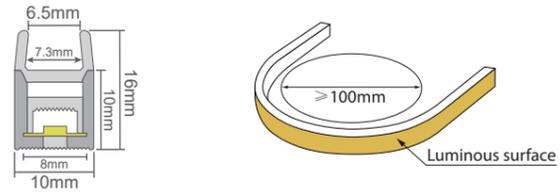

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	572	515	cut anywhere	24V	9.6W
	NW	600	540			
	CW	590	530			

Recommended Accessories

Cable output Solderless Power Cable (2m, L813 Male, Direct Plug-in Design)






Side Bend




N0306D

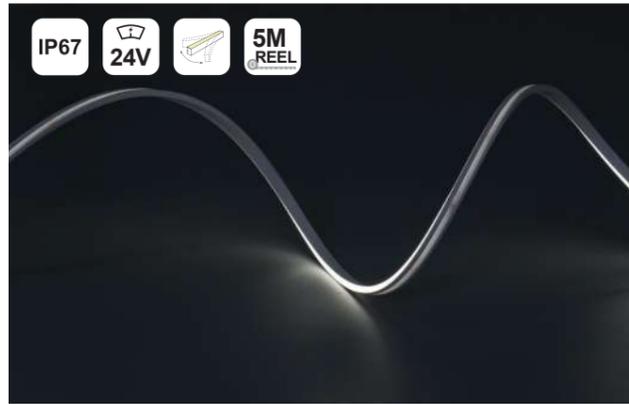

- Product size: 3*6mm
- N.W.(G/M): 28g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

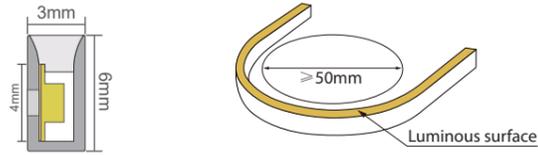

Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	2700 K	140	35.71mm	24V	4.8W
	3000 K	150			
	4000 K	160			
	5000 K	155			
	6500 K	154			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	




N0408D



- Product size: 4*8mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

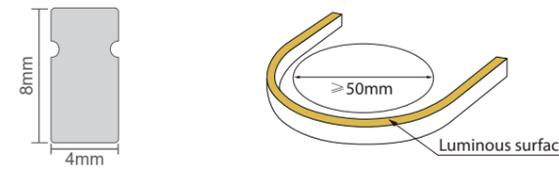

Recommend LED strip parameters

Series	CCT	Lumen/M	CRI	Unit cut	Voltage	Power/M
WHT	WW	533	90	25mm	24V	9.6W
	NW	580				
	CW	553				

Recommended Accessories


Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N0410D



- Product size: 4*10mm
- N.W.(G/M): 80g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

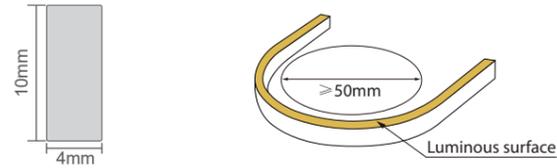


Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	276	248	41.67mm	24V	9.6W
	NW	292	263			
	CW	287	258			

Recommended Accessories



Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

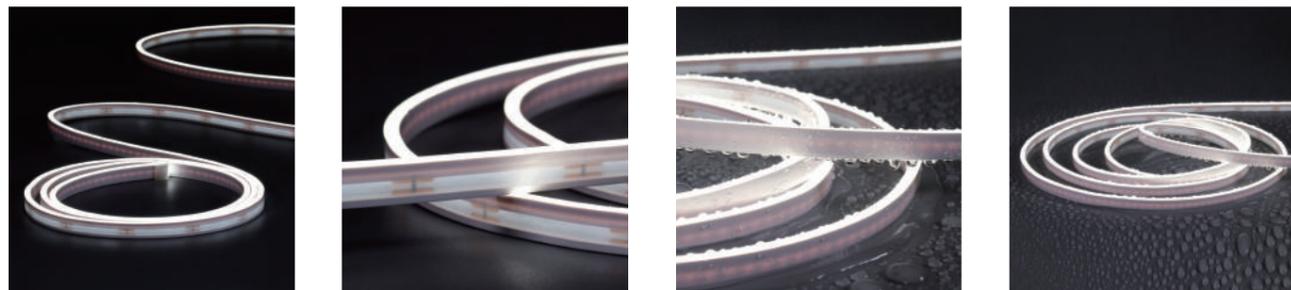

N0612D / FC-N0612D



- Product size: 6*12mm
- N.W.(G/M): 90g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

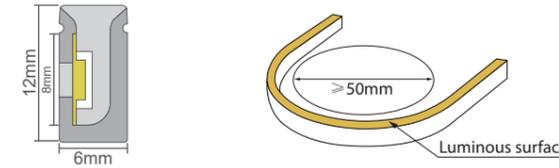

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	338	304	50mm	24V	9.6W
	NW	353	318			
	CW	347	312			
TW	WW	144	130	50mm	24V	9.6W
	CW	150	135			
WHT	WW	347	312	cut anywhere	24V	9.6W
	NW	366	329			
	CW	359	323			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	27	50mm	24V	9.6W
	RGB G	90			
	RGB B	20			

Recommended Accessories


Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N1010D-SIDE / FC-N1010D-SIDE



- Product size: 10*10mm
- N.W.(G/M): 120g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

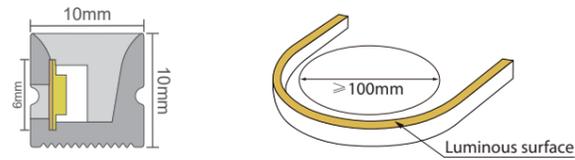

Recommend LED strip parameters


Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	636	572	41.67mm	24V	9.6W
	NW	672	605			
	CW	661	595			
WHT	WW	575	518	cut anywhere	24V	9.6W
	NW	605	545			
	CW	595	536			



N1020D / FC-N1020D



- Product size: 10*20mm
- N.W.(G/M): 300g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

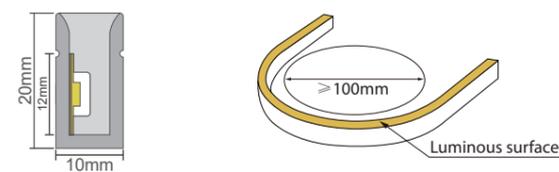

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	611	550	50mm	24V	14.4W
	NW	968	581			
	CW	634	571			
WHT	WW	878	790	50mm	24V	14.4W
	NW	911	820			
	CW	956	860			
TW	WW	268	241	50mm	24V	14.4W
	CW	274	247			
WHT	WW	651	586	cut anywhere	24V	14.4W
	NW	685	617			
	CW	674	607			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	52	50mm	24V	14.4W
	RGB G	154			
	RGB B	33			
RGBW	RGBW R	42	62.5mm	24V	15W
	RGBW G	117			
	RGBW B	23			
	RGBW WW	119			
	RGBW NW	125			
RGBW CW	123				
SPIRGB	SPI R	54	71.43mm	24V	15W
	SPI G	160			
	SPI B	34			
DMX512	DMX512 R	59	125mm	24V	16.8W
	DMX512 G	117			
	DMX512 B	38			
	DMX512 WW	149			
	DMX512 NW	156			
DMX512 CW	153				


Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

N1023D / FC-N1023D



- Product size: 10*23mm
- N.W.(G/M): 295g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

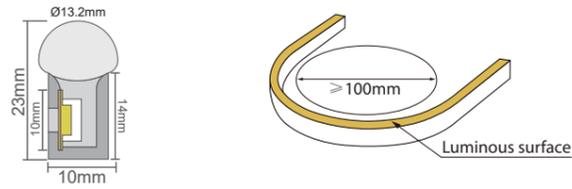

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	671	604	50mm	24V	14.4W
	NW	710	639			
	CW	697	627			
WHT	WW	967	870	50mm	24V	14.4W
	NW	1000	900			
	CW	1056	950			
TW	WW	253	228	50mm	24V	14.4W
	CW	285	257			
WHT	WW	716	644	cut anywhere	24V	14.4W
	NW	754	679			
	CW	741	667			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	57	50mm	24V	14.4W
	RGB G	169			
	RGB B	36			
RGBW	RGBW R	46	62.5mm	24V	15W
	RGBW G	129			
	RGBW B	25			
	RGBW WW	130			
	RGBW NW	137			
RGBW CW	135				
SPIRGB	SPI R	59	71.43mm	24V	15W
	SPI G	176			
	SPI B	37			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

N1212D-SIDE / FC-N1212D-SIDE



- Product size: 12*12mm
- N.W.(G/M): 200g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	549	494	50mm	24V	9.6W
	NW	574	517			
	CW	564	508			
TW	WW	235	212	50mm	24V	9.6W
	CW	245	221			
WHT	WW	564	508	cut anywhere	24V	9.6W
	NW	594	535			
	CW	584	526			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	45	50mm	24V	9.6W
	RGB G	146			
	RGB B	32			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N1615D-SIDE / FC-N1615D-SIDE



- Product size: 16*15mm
- N.W.(G/M): 210g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	916	824	50mm	24V	14.4W
	NW	968	871			
	CW	950	855			
WHT	WW	1317	1185	50mm	24V	14.4W
	NW	1367	1230			
	CW	1444	1300			
TW	WW	643	579	50mm	24V	14.4W
	CW	389	350			
WHT	WW	976	878	cut anywhere	24V	14.4W
	NW	1028	925			
	CW	1011	910			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	78	50mm	24V	14.4W
	RGB G	230			
	RGB B	49			
RGBW	RGBW R	63	62.5mm	24V	15W
	RGBW G	176			
	RGBW B	34			
	RGBW WW	178			
	RGBW NW	187			
SPIRGB	SPI R	81	71.43mm	24V	15W
	SPI G	240			
	SPI B	51			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

N1220D / FC-N1220D



- Product size: 12*20mm
- N.W.(G/M): 300g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	611	550	50mm	24V	14.4W
	NW	968	581			
	CW	634	571			
WHT	WW	878	790	50mm	24V	14.4W
	NW	911	820			
	CW	956	860			
TW	WW	268	241	50mm	24V	14.4W
	CW	274	247			
WHT	WW	651	586	cut anywhere	24V	14.4W
	NW	685	617			
	CW	674	607			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	52	50mm	24V	14.4W
	RGB G	154			
	RGB B	33			
RGBW	RGBW R	42	62.5mm	24V	15W
	RGBW G	117			
	RGBW B	23			
	RGBW WW	119			
	RGBW NW	125			
SPIRGB	SPI R	54	71.43mm	24V	15W
	SPI G	160			
	SPI B	34			
DMX512	DMX512 R	59	125mm	24V	16.8W
	DMX512 G	117			
	DMX512 B	38			
	DMX512 WW	149			
	DMX512 NW	156			
DMX512 CW	153				


Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Field install endcap	front cable entry +closed	
solder free seamless connector with both end (Without Cable Outlet)		
solder free seamless connector with both end (With Cable Outlet)		
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

N1220D-IP68



- Product size: 12*20mm
- N.W.(G/M): 300g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

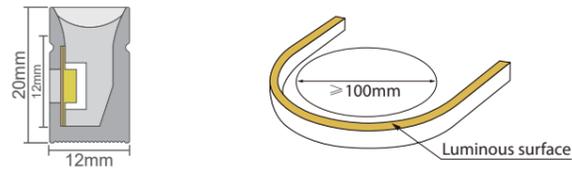

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	611	550	50mm	24V	14.4W
	NW	645	581			
	CW	634	571			

Recommended Accessories


Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	



N1824P / N1824P-B



- Product size: 18*24mm
- N.W.(G/M): 450g
- Material: Silicone
- Appearance Color: White / Black
- Length: 5M/reel, 10M/reel Customized
- Cable output: 300mm cable output on both ends
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

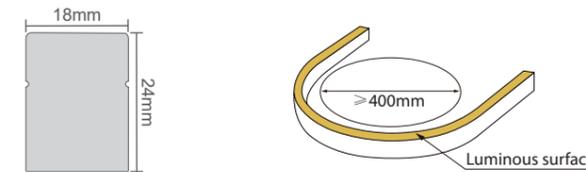

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	815	733	50mm	24V	19.2W
	NW	860	775			
	CW	775	761			
WHT	WW	1171	1053	50mm	24V	19.2W
	NW	1215	1093			
	CW	1275	1147			
TW	WW	580	550	50mm	24V	14.4W
	CW	650	580			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	78	50mm	24V	14.4W
	RGB G	154			
	RGB B	33			
RGBW	RGBW R	42	62.5mm	24V	15W
	RGBW G	117			
	RGBW B	23			
	RGBW WW	119			
	RGBW NW	125			
	RGBW CW	123			
RGBWW	RGBWW R	42	62.5mm	24V	19.2W
	RGBWW G	117			
	RGBWW B	23			
	RGBWW WW	127			
	RGBWW NW	133			
	RGBWW CW	131			
	SPIRGB	SPI R	54	71.43mm	24V
SPI G		160			
SPI B		34			

Recommended Accessories

Steel Wire Suspension Kit	Suspension Mounting Silver	
Adjustable Suspension Rod Kit	Suspension Mounting White	
Concealed-Wire Suspension Rod Kit	Suspension Mounting White	
Adjustable Suspension Rod Kit	Suspension Mounting Silver	
Steel Wire Suspension Kit	Suspension Mounting Black	
Adjustable Suspension Rod Kit	Suspension Mounting Black	
Concealed-Wire Suspension Rod Kit	Suspension Mounting Black	
Adjustable Suspension Rod Kit	Suspension Mounting Black	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	

N2020D-SIDE / FC-N2020D-SIDE



- Product size: 20*20mm
- N.W.(G/M): 470g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommend LED strip parameters


Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	916	824	50mm	24V	14.4W
	NW	968	871			
	CW	950	855			
WHT	WW	1317	1185	50mm	24V	14.4W
	NW	1367	1230			
	CW	1444	1300			
TW	WW	643	579	50mm	24V	14.4W
	CW	389	350			
WHT	WW	976	878	cut anywhere	24V	14.4W
	NW	1028	925			
	CW	1011	910			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	78	50mm	24V	14.4W
	RGB G	230			
	RGB B	49			
RGBW	RGBW R	63	62.5mm	24V	15W
	RGBW G	176			
	RGBW B	34			
	RGBW WW	178			
	RGBW NW	187			
	RGBW CW	185			
SPIRGB	SPI R	81	71.43mm	24V	15W
	SPI G	240			
	SPI B	51			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Mounting Clip	30mm/pc With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	




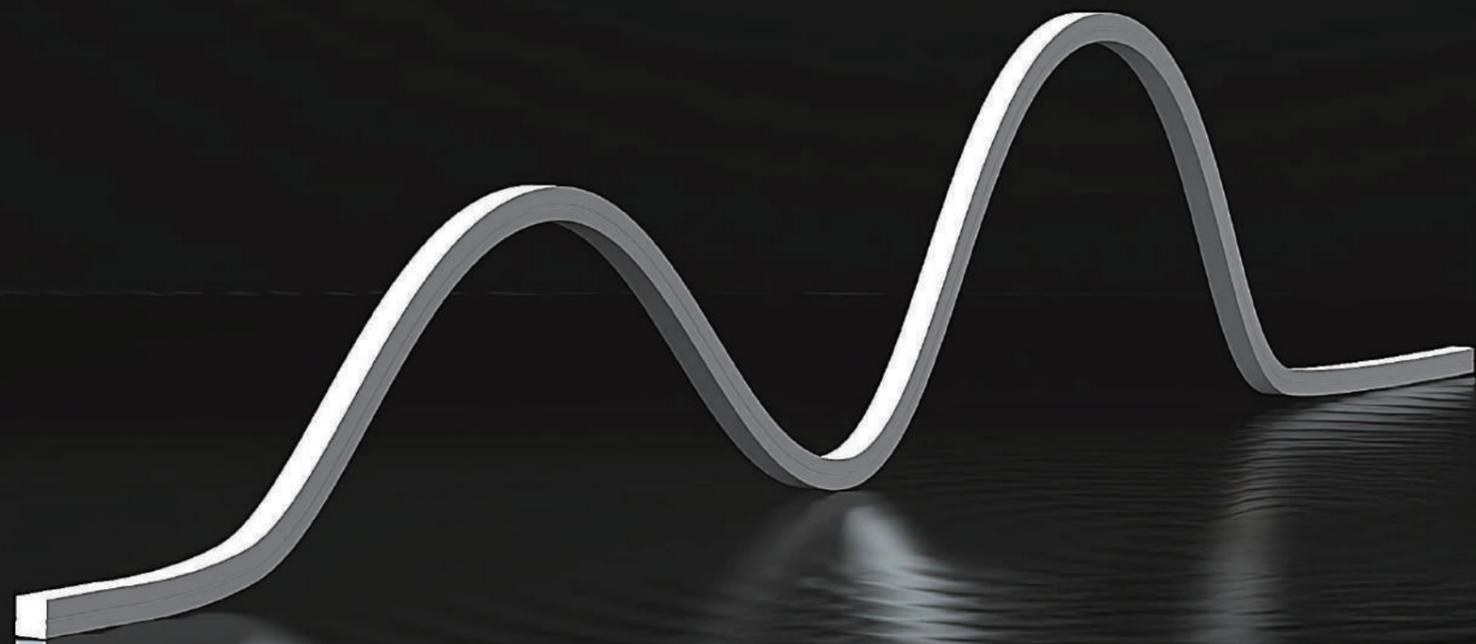

Top Bend



FCSP-840RGBCCT+IC-24-M17

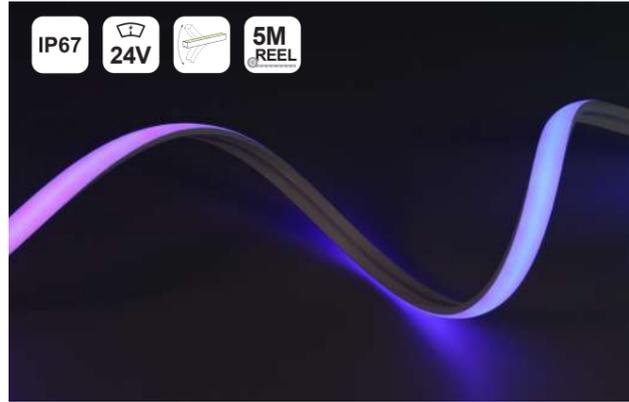


- Product size: 17.5*8.5mm
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.




Recommend LED strip parameters

Series	CCT	Lumen/m	Power/M	Unit cut	CRI	Voltage
RGBCCT	R	85	20W	71.42mm	Ra90+	24V
	G	390				
	B	65				
	WW	228				
	CW	260				
	RGB	465				
	RGB CCT	800				

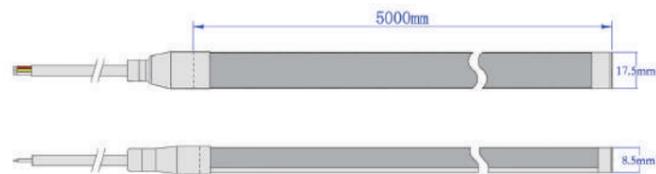

F-NEON-240-HV

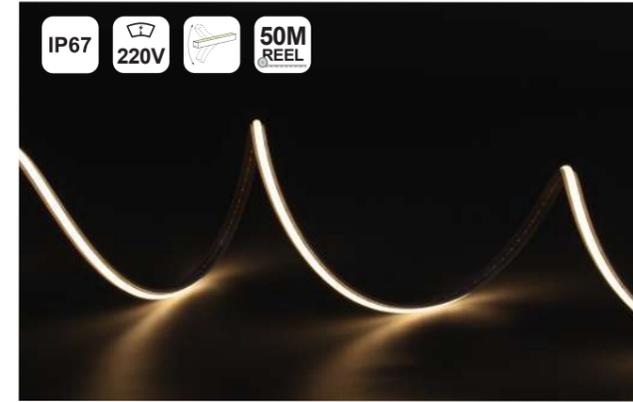


- Product size: 9.8*5mm
- N.W.(G/M): 73g
- Material: Silicone
- Length: 50M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.
- 25m without voltage drop, get the power from one end



Recommend LED strip parameters

Series	CCT	LM/m CRI 80	Unit cut	Voltage	Power/M
WHT	WW	475	100mm	220V	8W
	NW	500			
	CW	490			

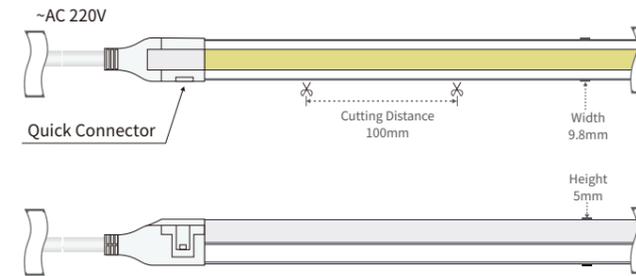

Recommended Accessories


Silicone Endcap	Top Wire Outlet	
Silicone Endcap	No Wire Outlet	
Glue	10g/pcs	
End cap with power input connector		
Glue	10g/pcs	



F-NEON-320




- Product size: 10*4mm
- N.W.(G/M): 35g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

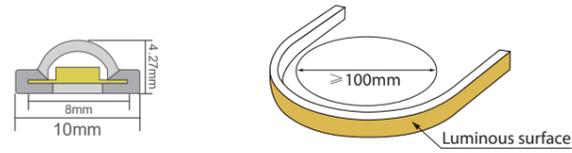


Recommend LED strip parameters


Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	860	775	25mm	24V	9.6W
	NW	910	815			
	CW	895	800			

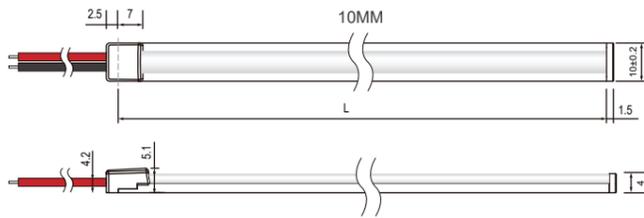

N0505D-TS

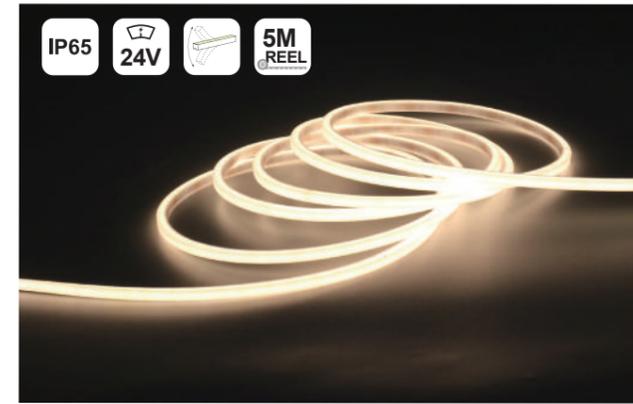


- Product size: 5*5mm
- N.W.(G/M): 35g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.
- 25m without voltage drop, get the power from one end

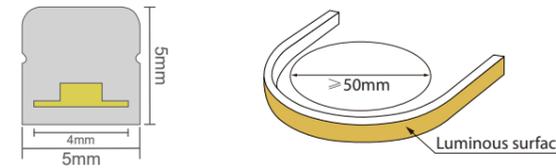

Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	665	21.74mm	24V	7W
	NW	689			
	CW	678			

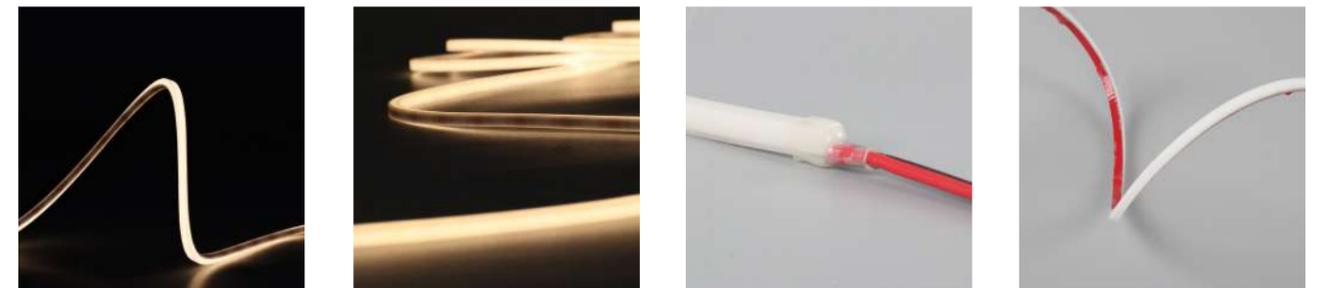


N0606D



- Product size: 6*6mm
- N.W.(G/M): 90g
- Material: Silicone
- Length: 3M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

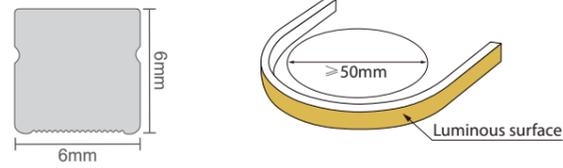

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	966	874	25mm	24V	9.6W
	NW	1018	922			
	CW	1002	908			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



N0613C



- Product size: 13*6mm
- N.W.(G/M): 140g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.
- 25m without voltage drop, get the power from one end

WW NW CW



Recommend LED strip parameters


Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	800	50mm	24V	9.6W
	NW	900			
	CW	950			

Recommended Accessories

Fixed clips	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
End cap with power input connector		
Glue	10g/pcs	




N1010D-TS

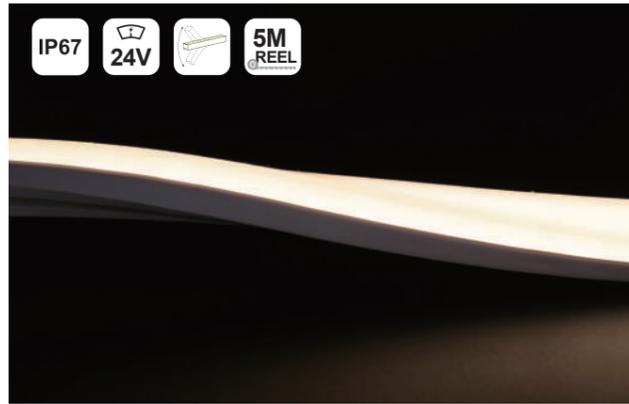

- Product size: 10*10mm
- N.W.(G/M): 90g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

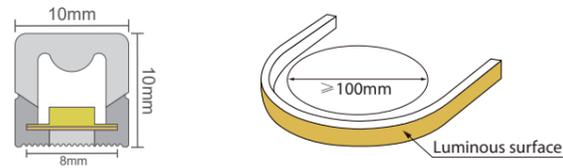

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	1016	914	33.33mm	24V	9.6W
	NW	1161	1045			
	CW	1097	987			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N1010D-TOP / FC-N10101D-TOP



- Product size: 10*10mm
- N.W.(G/M): 135g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW



Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	708	637	41.67mm	24V	9.6W
	NW	748	673			
	CW	736	662			
WHT	WW	640	576	cut anywhere	24V	9.6W
	NW	674	607			
	CW	663	597			

Recommended Accessories


Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	Metal With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N1010D-TOP-IP68



- Product size: 10*10mm
- N.W.(G/M): 135g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

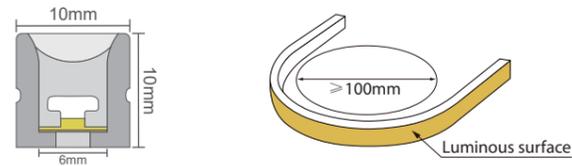


Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	708	637	41.67mm	24V	9.6W
	NW	748	673			
	CW	736	662			
WHT	WW	640	576	cut anywhere	24V	9.6W
	NW	674	607			
	CW	663	597			



N1207

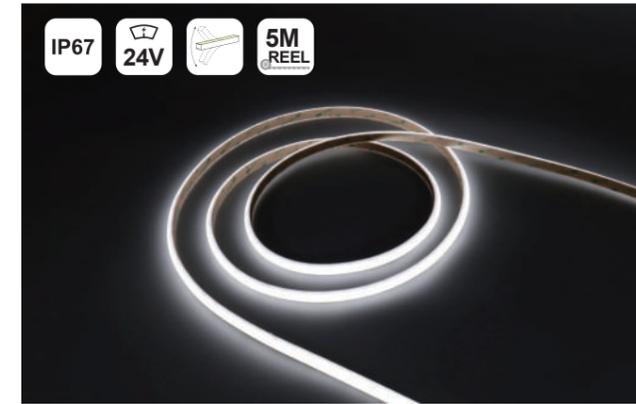

- Product size: 12.8*7mm
- N.W.(G/M): 70g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.




Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	900	20mm	24V	14.4W
	NW	937			
	CW	975			
WHT	WW	1200	20mm	24V	19.2W
	NW	1250			
	CW	1300			

Recommended Accessories


300LES adhesive		
Mounting Clip	Plastic With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	

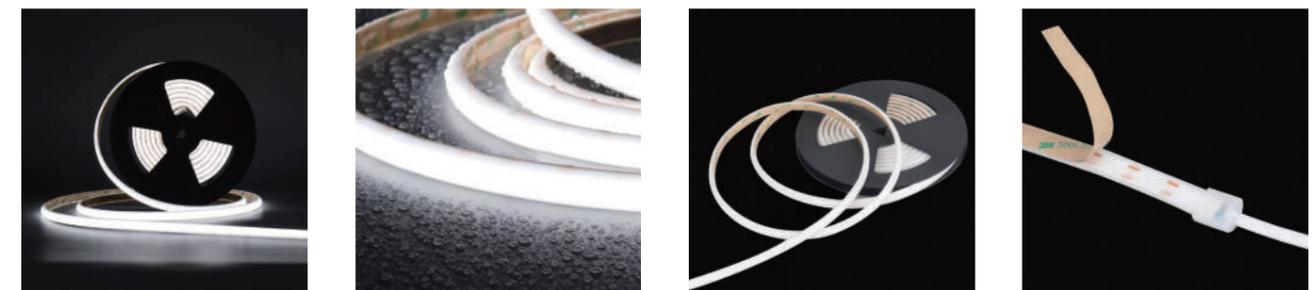

N1212



- Product size: 12*12mm
- N.W.(G/M): 110g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

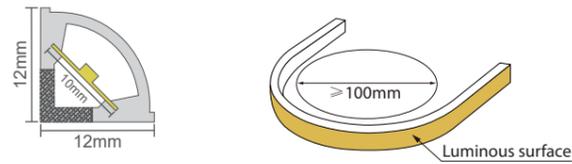

Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	780	20mm	24V	19.2W
	NW	800			
	CW	830			

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



N1212D-TOP / FC-N1212D-TOP



- Product size: 12*12mm
- N.W.(G/M): 190g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

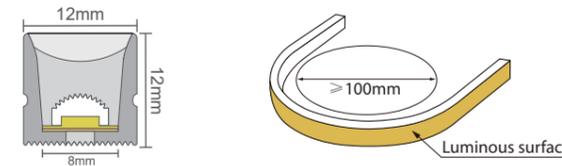


Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	655	590	50mm	24V	9.6W
	NW	684	616			
	CW	673	606			
TW	WW	288	259	50mm	24V	9.6W
	CW	292	263			
WHT	WW	673	606	cut anywhere	24V	9.6W
	NW	708	637			
	CW	696	626			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	54	50mm	24V	9.6W
	RGB G	175			
	RGB B	38			

Recommended Accessories


Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

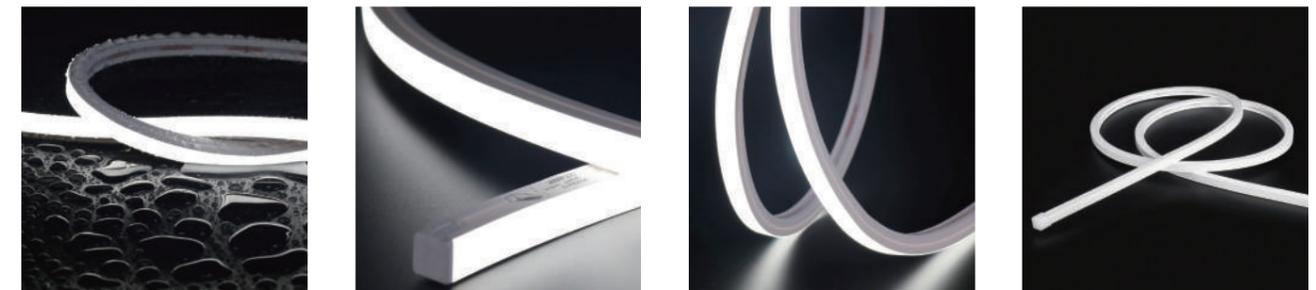

N1313D-HV



- Product size: 13*13mm
- N.W.(G/M): 138g
- Material: Silicone
- Length: 50M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

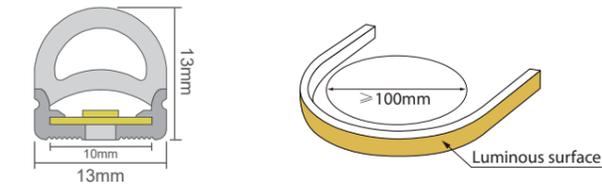

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	Unit cut	Voltage	Power/M
WHT	WW	770	100mm	220V	10W
	NW	860			
	CW	820			
Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	76	500mm	220V	12W
	RGB G	195			
	RGB B	42			



N1615D-TOP / FC-N1615D-TOP



- Product size: 16*15mm
- N.W.(G/M): 320g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	901	811	50mm	24V	14.4W
	NW	952	857			
	CW	935	842			
WHT	WW	1294	1165	50mm	24V	14.4W
	NW	1344	1210			
	CW	1417	1275			
TW	WW	395	356	50mm	24V	14.4W
	CW	404	364			
WHT	WW	960	864	cut anywhere	24V	14.4W
	NW	1011	910			
	CW	994	895			

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	76	50mm	24V	14.4W
	RGB G	227			
	RGB B	48			
RGBW	RGBW R	62	62.5mm	24V	15W
	RGBW G	173			
	RGBW B	33			
	RGBW WW	175			
	RGBW NW	184			
	RGBW CW	181			
SPIRGB	SPI R	80	71.43mm	24V	15W
	SPI G	238			
	SPI B	50			
DMX512	DMX512 R	59	125mm	24V	16.8W
	DMX512 G	177			
	DMX512 B	38			
	DMX512 WW	149			
	DMX512 NW	156			
	DMX512 CW	153			


Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Field install endcap	front cable entry +closed	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

N1615D-TOP-IP68



- Product size: 16*15mm
- N.W.(G/M): 320g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

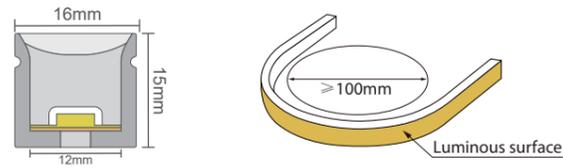


Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	901	811	50mm	24V	14.4W
	NW	952	857			
	CW	935	842			

Recommended Accessories


Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	

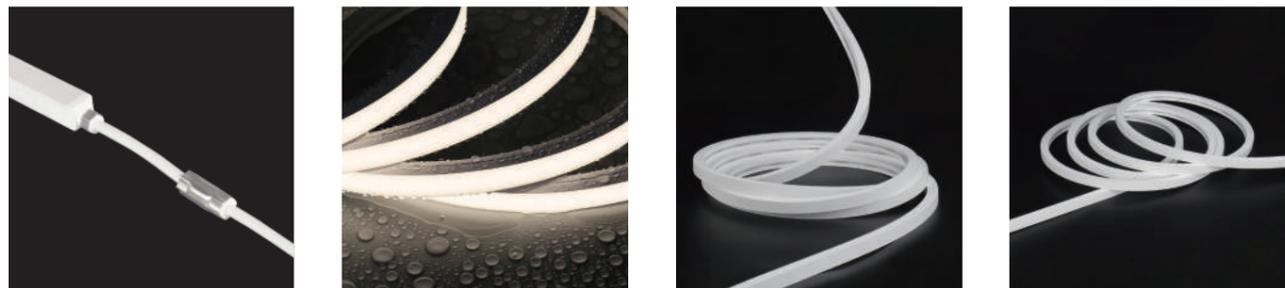

N1615D-TOP-HV



- Product size: 16*15mm
- N.W.(G/M): 320g
- Material: Silicone
- Length: 50M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

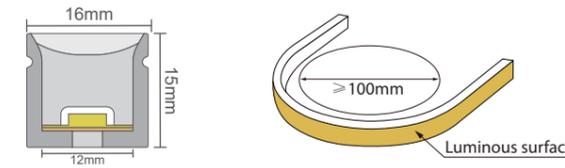

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	780	695	100mm	220-240V	12W
	NW	815	735			
	CW	800	720			

Recommended Accessories

Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Curved Profile	1 Meter With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	



NT1506D



- Product size: 15*6mm
- N.W.(G/M): 74g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW



Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	235	211	cut anywhere	24V	9.6W
	NW	250	224			
	CW	245	220			

Recommended Accessories		
300LES adhesive		
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	No Wire Outlet	
Silicone Endcap	Left-side Through-hole End Cap + Solid End Cap	
Silicone Endcap	Right-side Through-hole End Cap + Solid End Cap	
Glue	10g/pcs	




N2018D



- Product size: 20*18mm
- N.W.(G/M): 320g
- Material: Silicone
- Length: 5M/reel, Customized
- Cable output: 300mm cable output on both ends
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

WW NW CW

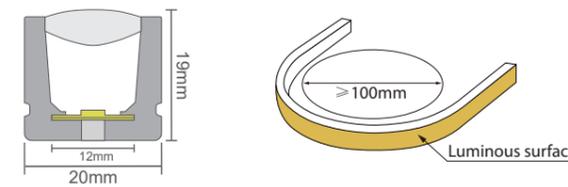

Recommend LED strip parameters

Series	CCT	LM/m CRI 80	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	1168	1051	50mm	24V	14.4W
	NW	1233	1110			
	CW	1217	1095			

Recommended Accessories		
Mounting Aluminium Profile	1 Meter With Screws	
Mounting Aluminium Profile	1 Meter With Screws	
Mounting Clip	30mm/pc With Screws	
Mounting Clip	30mm/pc With Screws	
Injection Moulded Endcap	Top Wire Outlet	
Injection Moulded Endcap	Bottom Wire Outlet	
Injection Moulded Endcap	Side Wire Outlet	
Injection Moulded Endcap	Bottom Entry	
Injection Moulded Endcap	No Wire Outlet	
XYB15 2P (Waterproof Inline Connector)		







360° Neon



ND24D

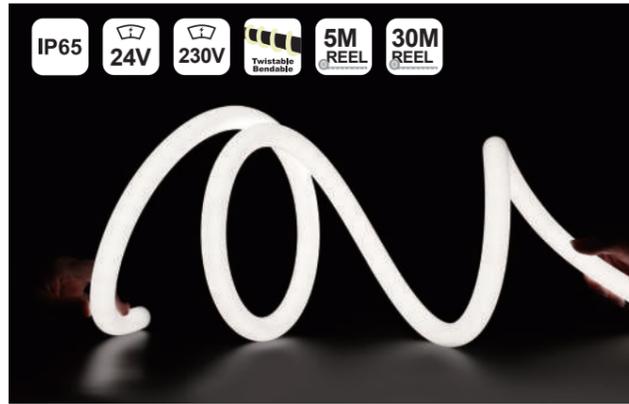



- Product size: $\Phi 24\text{mm}$
- N.W.(G/M): 580g
- Material: Silicone
- Light transmittance: 75%
- Bending diameter: $\Phi 100\text{mm}$
- Extrusion process: Dual color extrusion.
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.

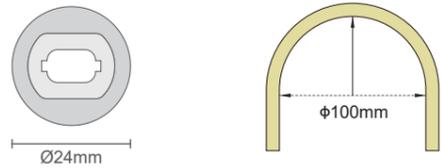

Series	CCT	Lumen/m	Unit cut	Voltage	Power/M
RGB	RGB R	210	50mm	24V	28.8W
	RGB G	585			
	RGB B	140			
RGBW	RGBW R	162	50mm	24V	40W
	RGBW G	510			
	RGBW B	110			
	WW	785			
	NW	830			
	CW	816			
RGBIC	SPI R	260	50mm	24V	36W
	SPI G	730			
	SPI B	170			

Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	1300	50mm	24V	19.2W
	NW	1370			
	CW	1350			
TW	WW	580	50mm	24V	19.2W
	CW	630			

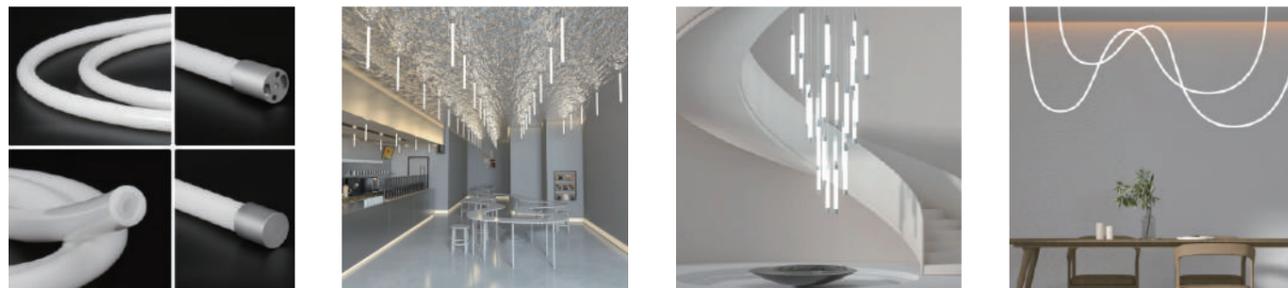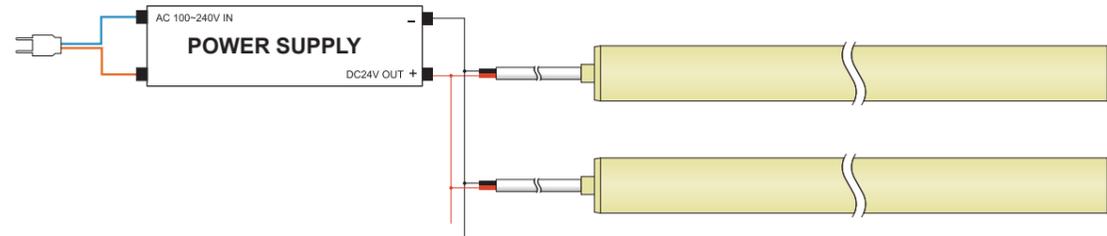

Accessories


Model No.	Application	Accessories picture	Packing List	Accessories list
AS-ND24D-A Vertical ceiling			Quantities 20set N.W 0.35KG Total weight 8.2KG Package size L1070*W180*H145	1 meter round PC tube 1 pc Vertical Ceiling installation aluminum end cap 2 pcs fixed aluminum end caps 1 pc aluminum end cap without hole 2 pcs silicone end caps (1pc with hole, 1pc without hole) 8 pcs screws 2 pcs white plastic anchors 1 pc Phillips screwdriver 1 pc M4 hexagonal wrench
AS-ND24D-B Vertical hoisting			Quantities 20set N.W 0.45KG Total weight 10.2KG Package size L1070*W180*H145	1 meter round Plastic tube 1 pc Vertical Hoisting installation aluminum end cap 1 pc 1 meter Conductive Steel Rope with cable inside 1 pc aluminum end cap without hole 2 pcs silicone end caps (1pc with hole, 1pc without hole) 7 pcs screws 1 pc white plastic anchors 1 pc Phillips screwdriver
AS-ND24D-C Double-head ceiling			Quantities 73set N.W 0.11KG Total weight 9.2KG Package size L468*W375*237	2 pcs Vertical Ceiling installation aluminum end caps 2 pcs fixed aluminum end caps 2 pcs silicone end caps (1pc with hole, 1pc without hole) 10 pcs screws 4 pcs white plastic anchors 1 pc Phillips screwdriver 1 pc M4 hexagonal wrench
AS-ND24D-D Horizontal hoisting			Quantities 20set N.W 0.34KG Total weight 8KG Package size L1070*W180*145	1 meter round Plastic tube assembled with hanging clips 2 pcs steel rope with copper bolts 2 pcs screws for steel rope bolts 2 pcs silicone end caps (1pc with hole, 1pc without hole) 2 pcs white plastic anchors
AS-ND24D-E Round hoisting			Quantities 73set N.W 0.1KG Total weight 8.5KG Package size L468*W375*237	2 pcs thread locker 2 pcs side outlet aluminum end caps 2 pcs silicone end caps without hole 7 pcs screws 1 pcs plastic anchors 1 pc Phillips screwdriver
AS-ND24D-F Telescopic rod ceiling			Quantities 24set N.W 0.17KG Total weight 5.2KG Package size L400*W180*145	1 set of assembled telescopic rods (the telescopic distance can be adjusted between 300MM-600MM) 1 pc white plastic anchors 1 pc screw
AS-ND24D-G Steel Rope Ceiling			Quantities 146set N.W 0.05KG Total weight 8.5KG Package size L468*W375*237	1 pc 1.5m assembled steel rope (including 30MM round PC tube + 30MM PC clips + 2pcs copper bolts) 1 pc screw 1 pc white plastic anchors
AS-ND24D-H Wall Mounting			Quantities 73set N.W 0.09KG Total weight 7.7KG Package size L468*W375*237	1 pc Vertical Ceiling installation aluminum end cap 1 pcs fixed aluminum end cap 2 pcs silicone end caps (1pc with hole, 1pc without hole) 3 pcs 30MM PC clips 11 pcs screws 2 pcs white plastic anchors 1 pc Phillips screwdriver 1 pc M4 hexagonal wrench

FND24D




- Product size: $\Phi 24\text{mm}$
- N.W.(G/M): 610g
- Material: Silicone
- Light transmittance: 75%
- Bending diameter: $\Phi 100\text{mm}$
- Extrusion process: Dual color extrusion.
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.

WW NW CW

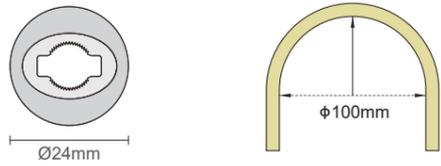


Recommend LED strip parameters


Series	CCT	LM/m CRI 90	Unit cut	Voltage	Power/M
WHT	WW	1150	45.45mm	24V	14W
	NW	1200			
	CW	1190			

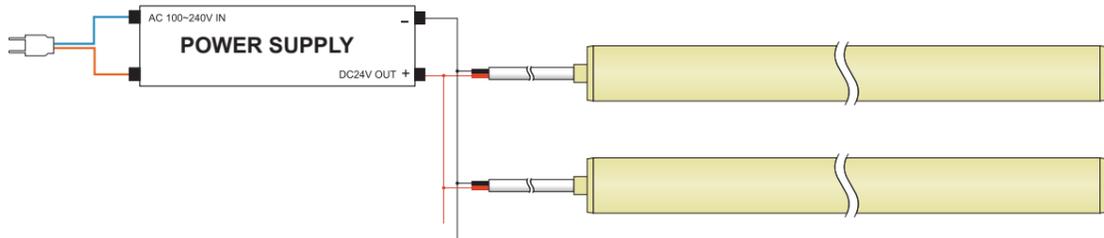

ND14D

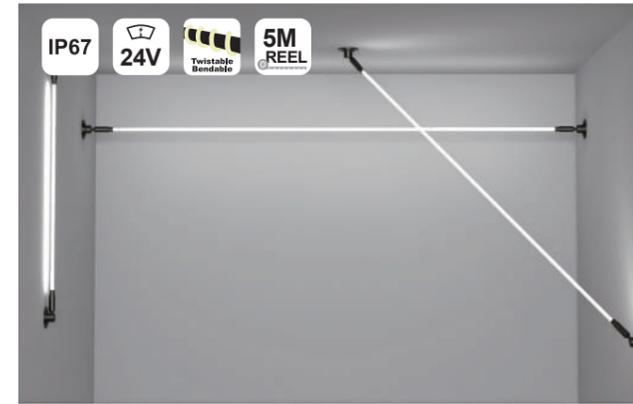


- Product size: $\Phi 14\text{mm}$
- 360° uniform light emission, without shadows.
- Newly upgraded third-generation product, easy to install and beautiful in appearance.
- Can perfectly prevent the internal light strip from being damaged during installation.
- When in use, the product can be well suspended and straightened into a straight line.
- 360° plane rotating structure base + side 90° rotating structure, no need to consider the installation angle when installing.
- Application: Office/Home/Hotel/Exhibition/Hall.

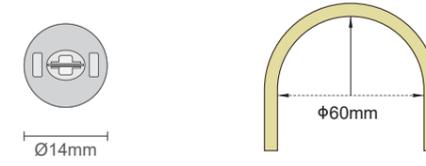



Recommend LED strip parameters

Series	CCT	LM/m CRI 90	PCB Width	Voltage	Power/M
WHT	2700 K	1180	5mm	24V	16W
	3000 K	1280			
	3500 K	1300			
	4000 K	1350			
	6000 K	1300			

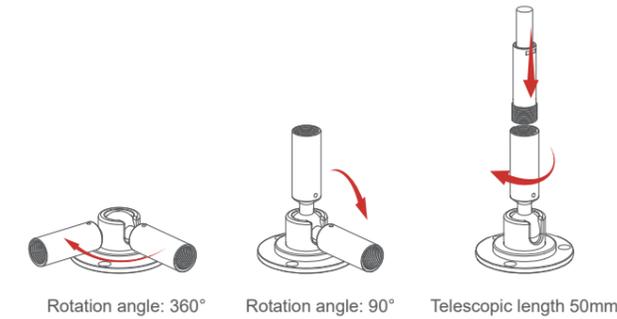


Recommended Accessories


- Neon Strip 5-10 Meters/Roll
- Ball Head Rod
- Base
- Solderless Connector
- Expansion Plug/Screw*6
- Tool

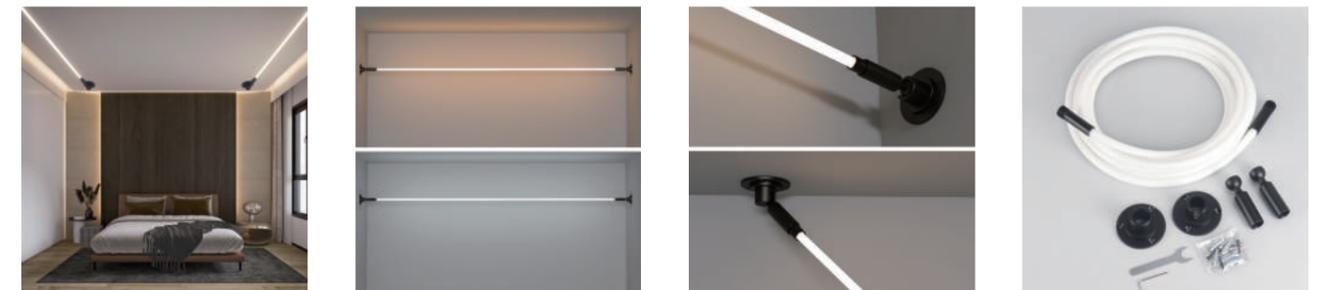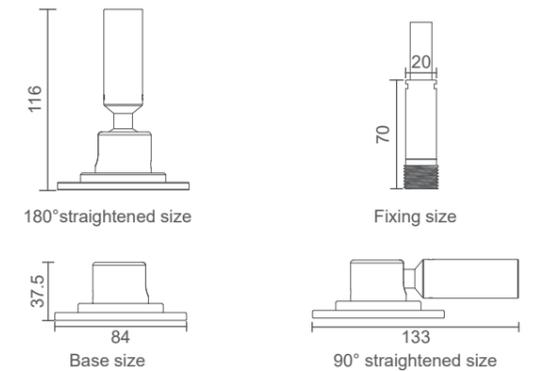

ND13

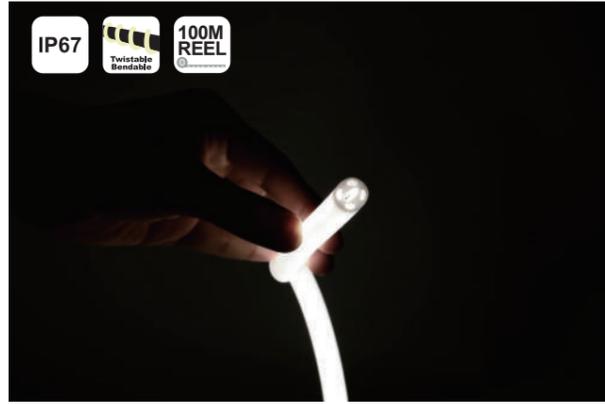

- Product size: $\Phi 13\text{mm}$
- PCB width: 5-6mm
- Weight/Carton: 13.5KG
- Material: Silicone
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

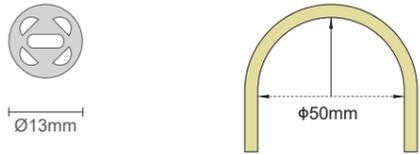

Recommended Accessories


Mounting Clip	Plastic	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



ND16



- Product size: $\Phi 16\text{mm}$
- PCB width: 5-6mm
- Weight/Carton: 17.4KG
- Material: Silicone
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

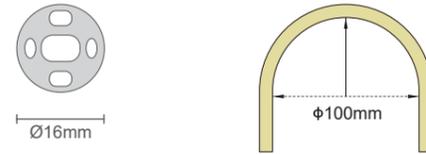

Recommended Accessories

Mounting Clip	Plastic	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



ND20




- Product size: $\Phi 20\text{mm}$
- PCB width: 6-8mm
- Weight/Carton: 32KG
- Material: Silicone
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommended Accessories


Mounting Clip	Plastic	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	

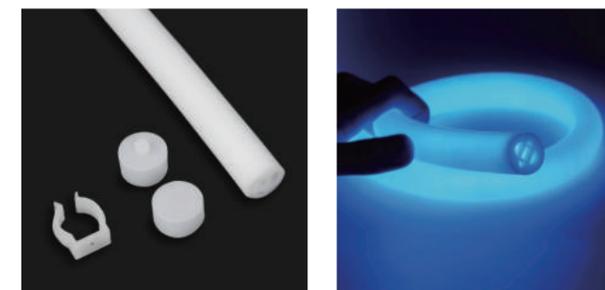

ND22



- Product size: $\Phi 22\text{mm}$
- PCB width: 8mm
- Weight/Carton: 32KG
- Material: Silicone
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

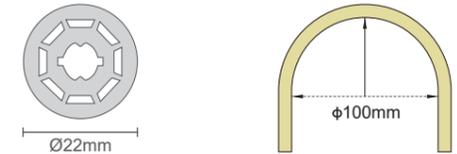

Recommended Accessories


Mounting Clip	Plastic	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



ND26




- Product size: $\Phi 26\text{mm}$
- PCB width: 10mm
- Weight/Carton: 44.5KG
- Material: Silicone
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

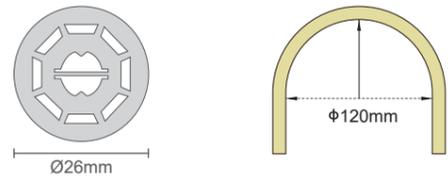

Recommended Accessories


Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	

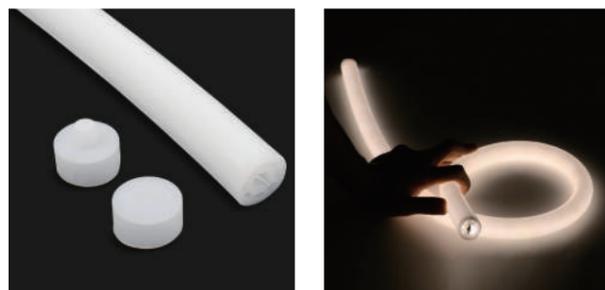

ND33



- Product size: $\Phi 33\text{mm}$
- PCB width: 8mm
- Weight/Carton: 36.5KG
- Material: Silicone
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

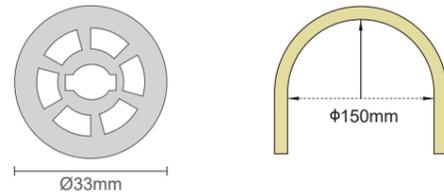

Recommended Accessories


Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



ND40



- Product size: $\Phi 40\text{mm}$
- PCB width: 8mm
- Weight/Carton: 49.8KG
- Material: Silicone
- 360° uniform light emission, without shadows.
- Application: Office/Home/Hotel/Exhibition/Hall.
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

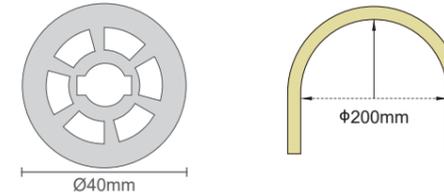

Recommended Accessories

Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	






Rectangle Neon Silicone Tube



N2010




- Product size: 20*10mm
- PCB width: 10-12mm
- Weight/Carton: 21.5KG
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

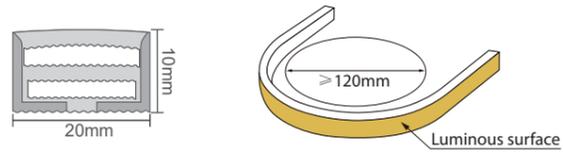

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	

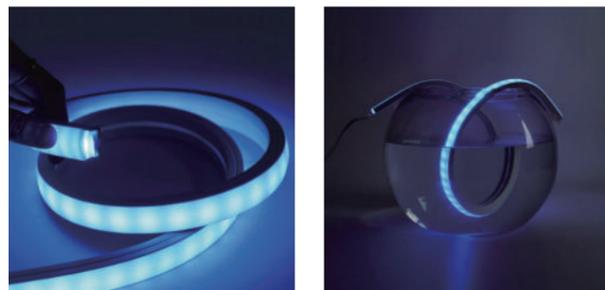

N2014




- Product size: 20*14mm
- PCB width: 12-15mm
- Weight/Carton: 23.8KG
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

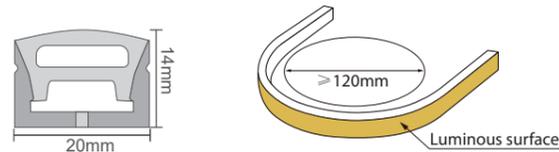


Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	

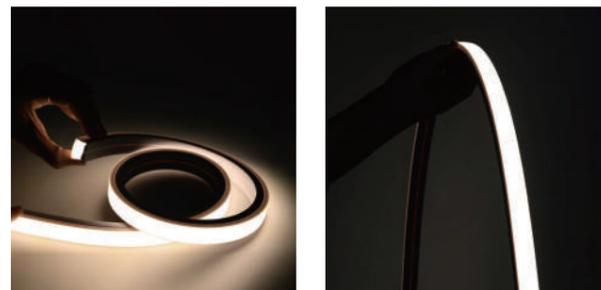

N2020

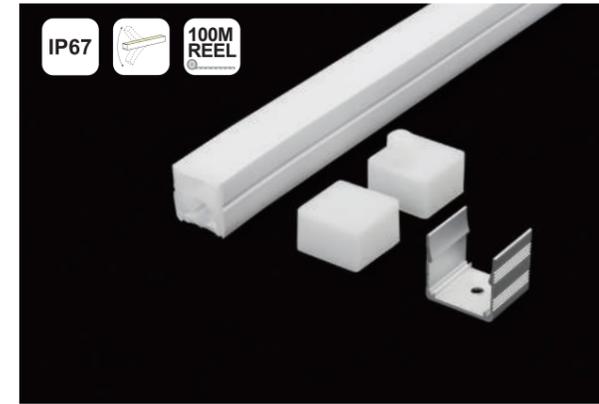


- Product size: 20*20mm
- PCB width: 10-12mm
- Weight/Carton: 30.5KG
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

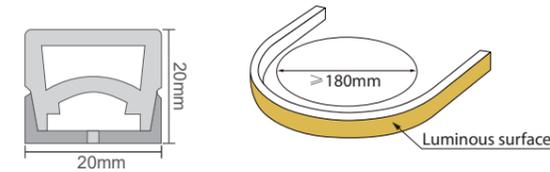


Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	

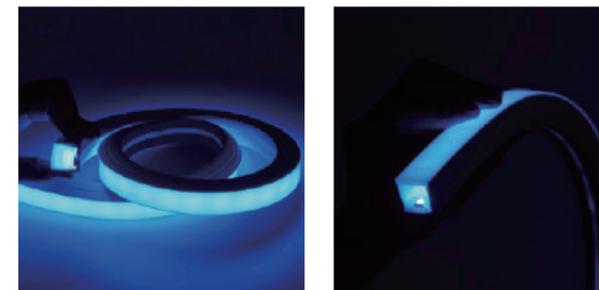

N3020

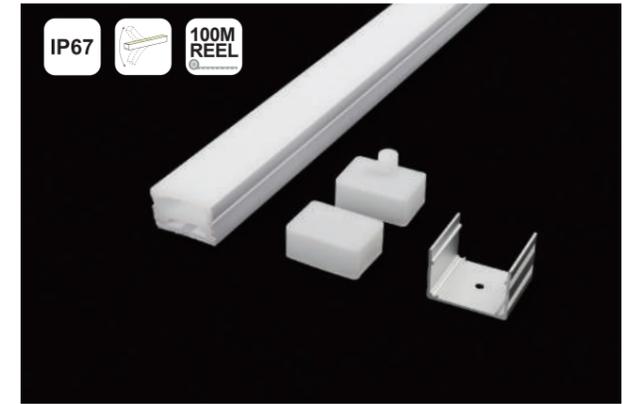

- Product size: 30*20mm
- PCB width: 16-18mm
- Weight/Carton: 44.5KG
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

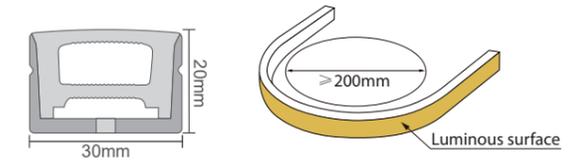

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



N5025



- Product size: 50*25mm
- PCB width: 18-20mm
- Weight/Carton: 34.5KG
- Material: Silicone
- Length: 50M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

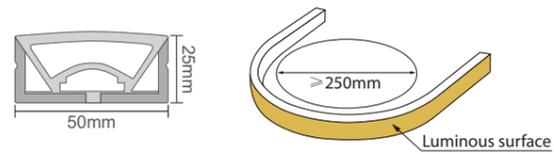


Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



N0410B

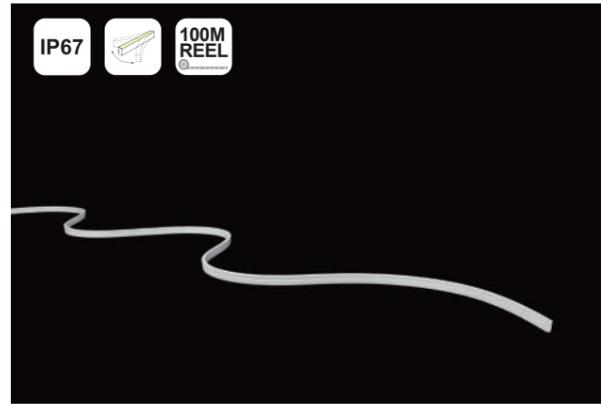

- Product size: 4*10mm
- PCB width: 4-7mm
- N.W.(G/M): 45g
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

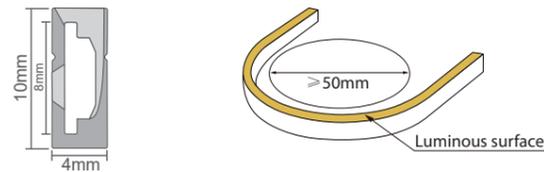

Recommended Accessories


Mounting Clip	Plastic With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N0513




- Product size: 5*13mm
- PCB width: 8-10mm
- N.W.(G/M): 60g
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

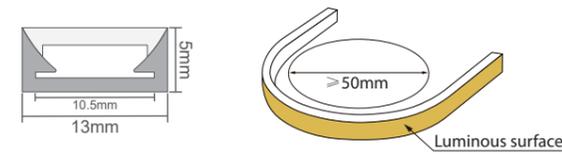

Recommended Accessories


Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	

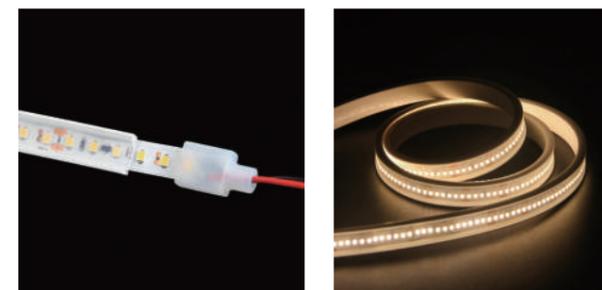

N1326




- Product size: 13*26mm
- PCB width: 10-12mm
- N.W.(G/M): 300g
- Material: Silicone
- Length: 50M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

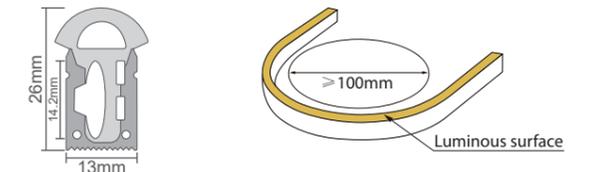

Recommended Accessories

Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

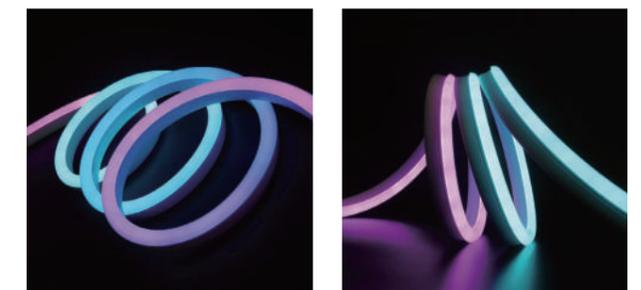

N2515



- Product size: 25*15mm
- PCB width: 15-18mm
- N.W.(G/M): 295g
- Material: Silicone
- Length: 50M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.



Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Glue	10g/pcs	



N0612P



- Product size: 6*12mm
- PCB width: 8mm
- N.W.(G/M): 75g
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

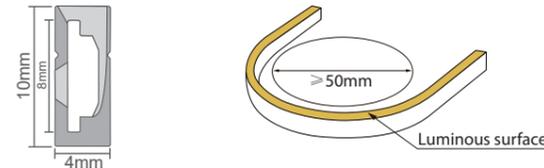

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N0816P



- Product size: 8*16mm
- PCB width: 8mm
- N.W.(G/M): 145g
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

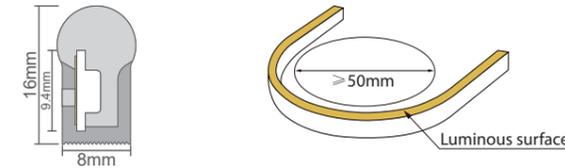

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Glue	10g/pcs	



N1010P-TOP



- Product size: 10*10mm
- PCB width: 5mm
- N.W.(G/M): 120g
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

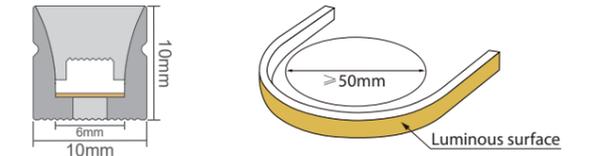

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N1010P-SIDE




- Product size: 10*10mm
- PCB width: 5mm
- N.W.(G/M): 120g
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

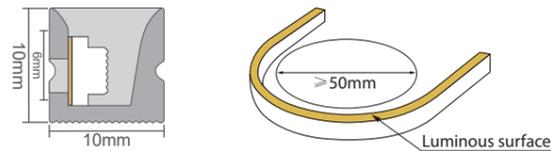

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

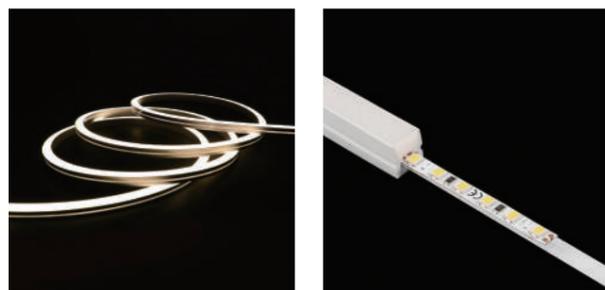

N1020P




- Product size: 10*20mm
- PCB width: 10mm
- N.W.(G/M): 250g
- Material: Silicone
- Length: 100M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

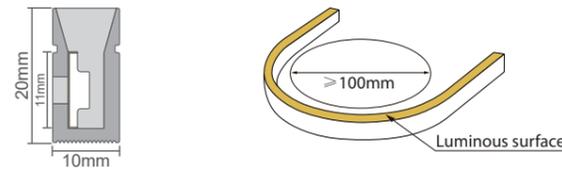

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

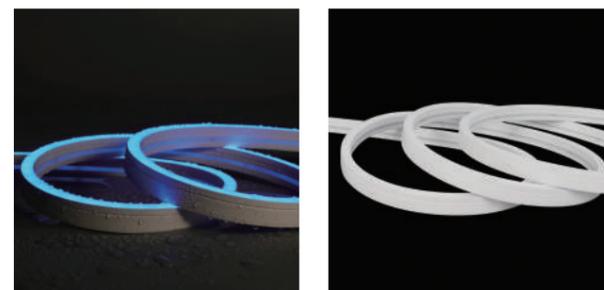

N1023P



- Product size: 10*23mm
- PCB width: 10mm
- N.W.(G/M): 250g
- Material: Silicone
- Length: 50M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

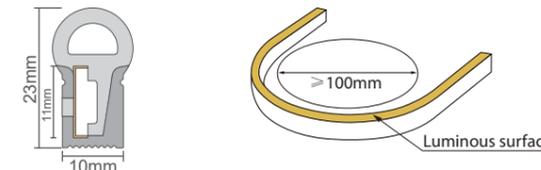

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N1220P



- Product size: 12*20mm
- PCB width: 10mm
- N.W.(G/M): 250g
- Material: Silicone
- Length: 50M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

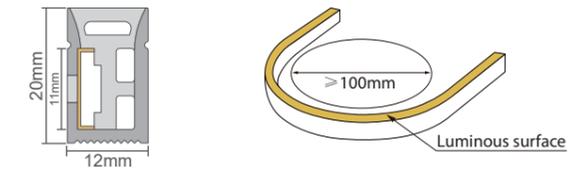

Recommended Accessories


Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	



N1615P






- Product size: 16*15mm
- PCB width: 10mm
- N.W.(G/M): 260g
- Material: Silicone
- Length: 50M/reel, Customized
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

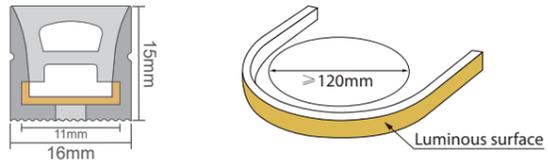

Recommended Accessories

Mounting Clip	30mm/pc With Screws	
Silicone Endcap	One End Cap + One Plug Straight Outlet	
Silicone Endcap	One End Cap + One Plug Bottom Outlet	
Silicone Endcap	One End Cap + One Plug Side Outlet	
Glue	10g/pcs	

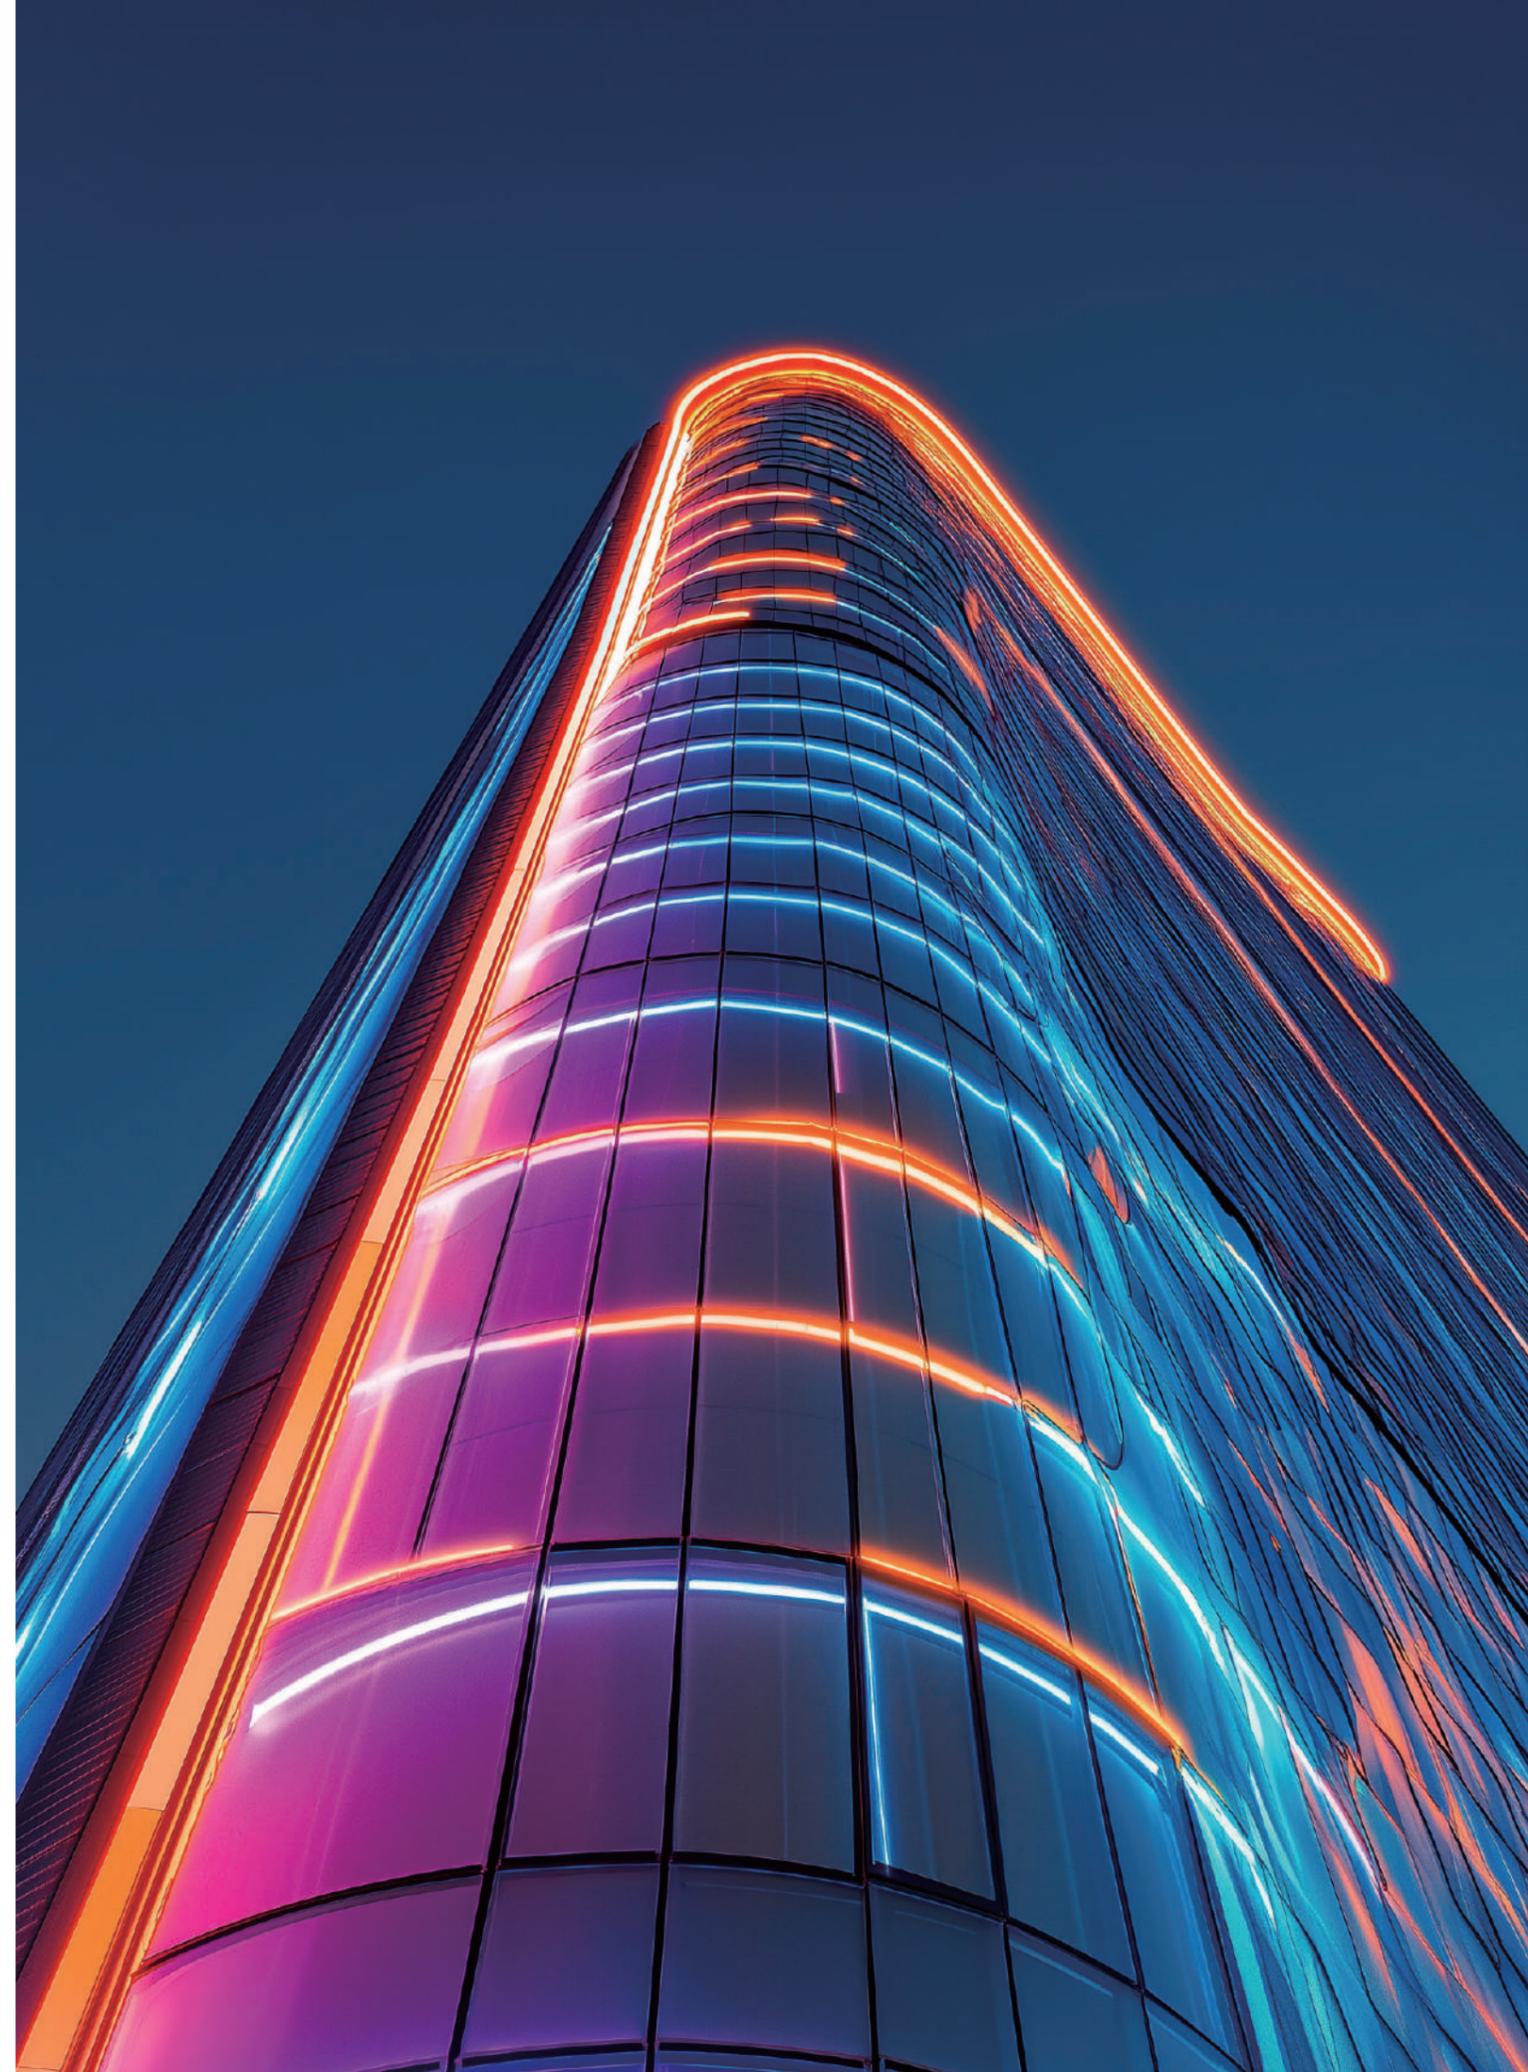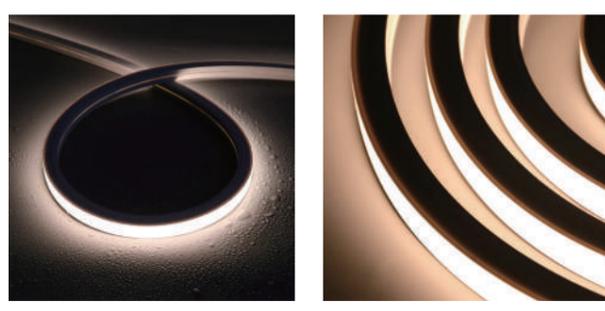

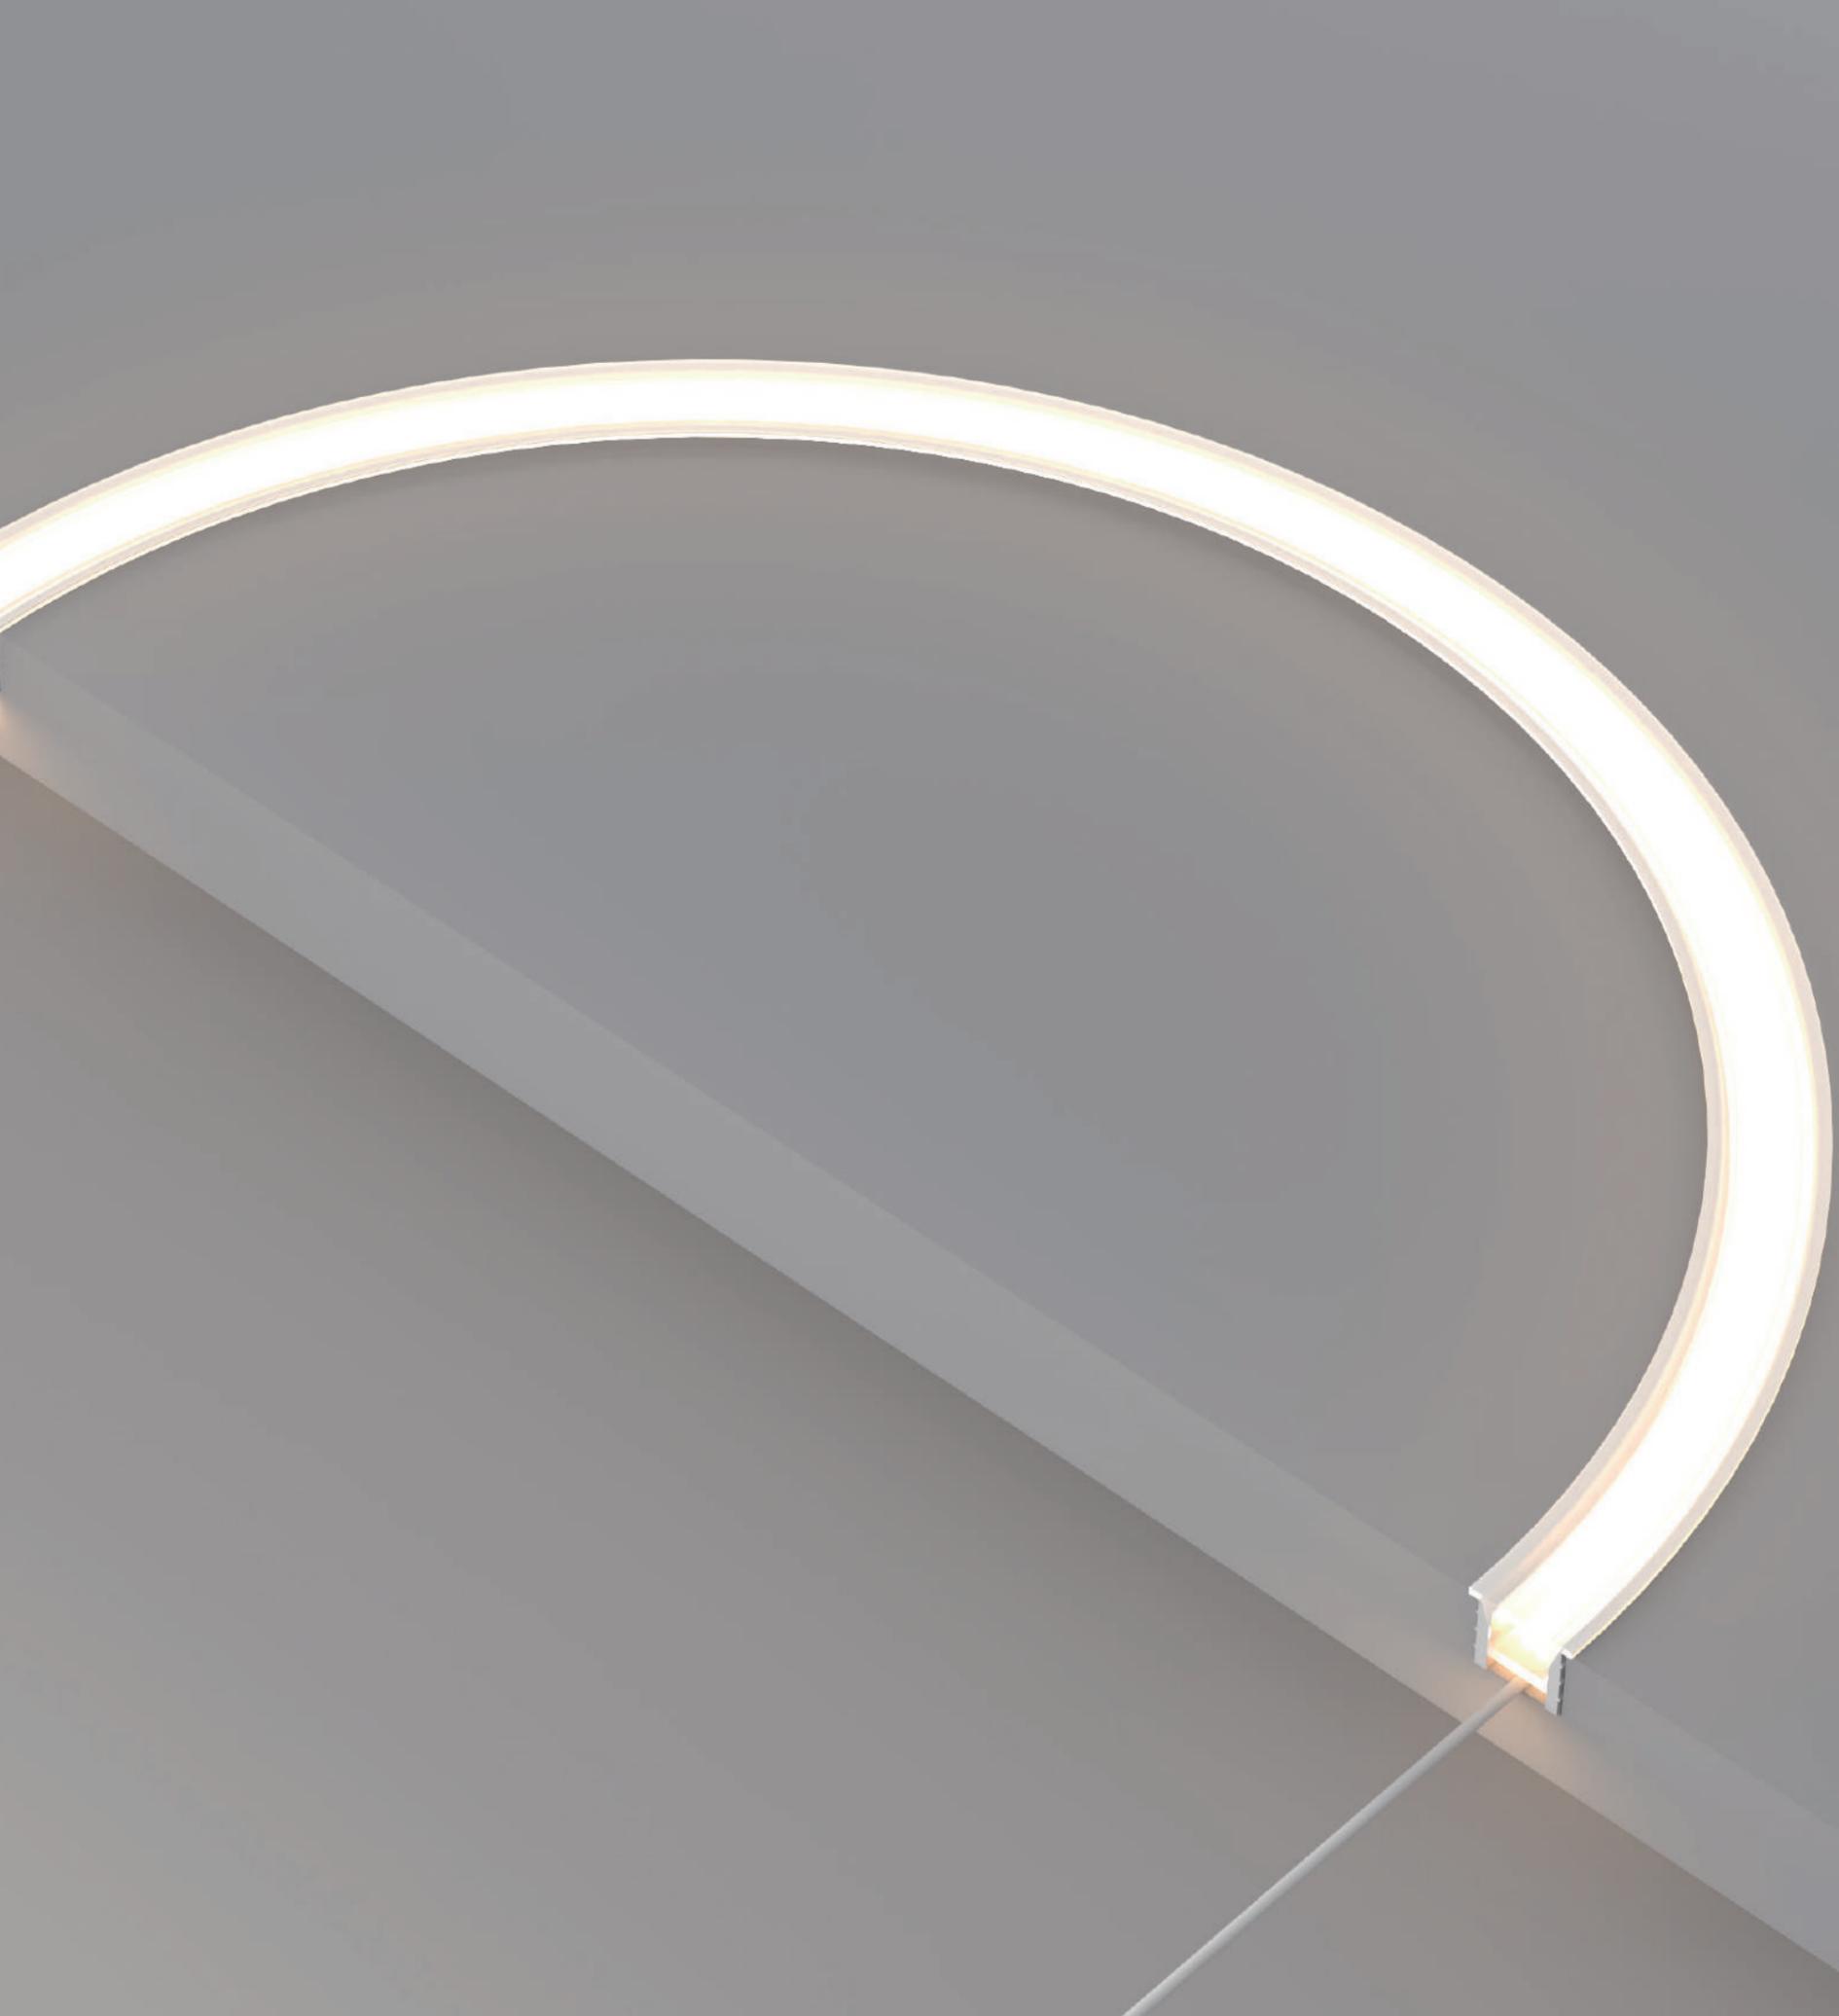



Rectangle Neon Silicone Cover



NC1010



- Product size: 10*10mm
- PCB width: 5mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

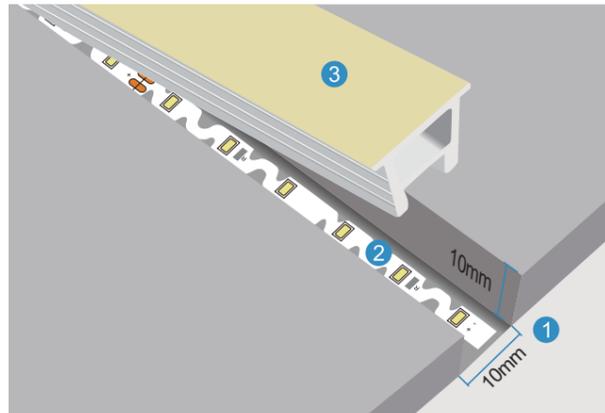



- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more

NC1212



- Product size: 12*12mm
- PCB width: 8mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

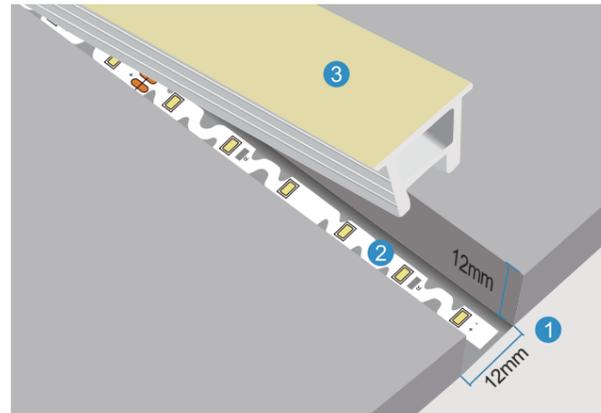



- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more

NC1616



- Product size: 16*16mm
- PCB width: 10-12mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

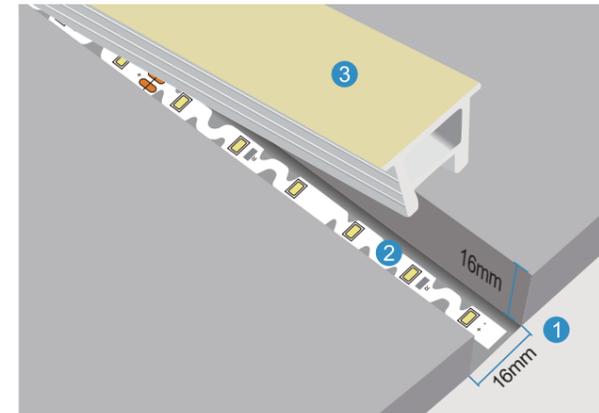



- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more

NC2010



- Product size: 20*10mm
- PCB width: 10-15mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

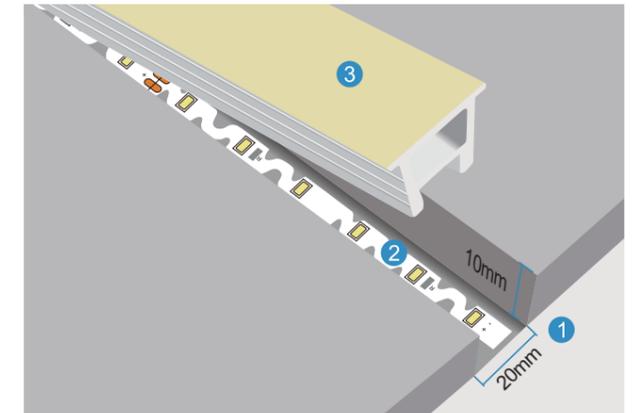



- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more

NC2014



- Product size: 20*14mm
- PCB width: 10-15mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

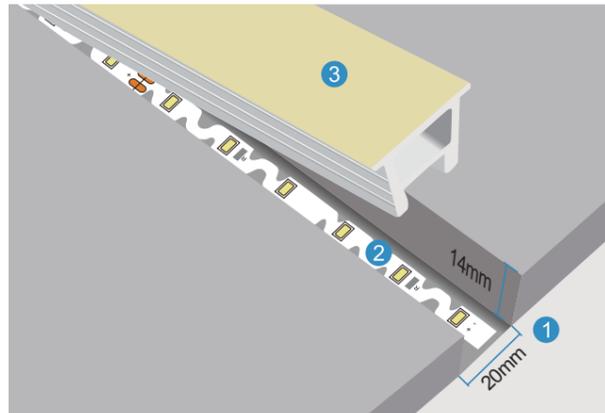



- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more

NC2018



- Product size: 20*18mm
- PCB width: 10-15mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

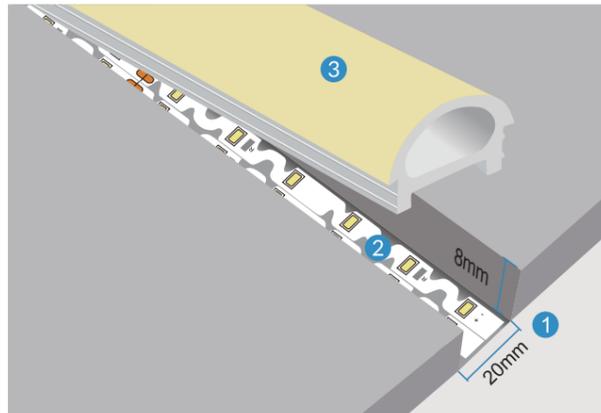



- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more

NC2020



- Product size: 20*20mm
- PCB width: 10-15mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

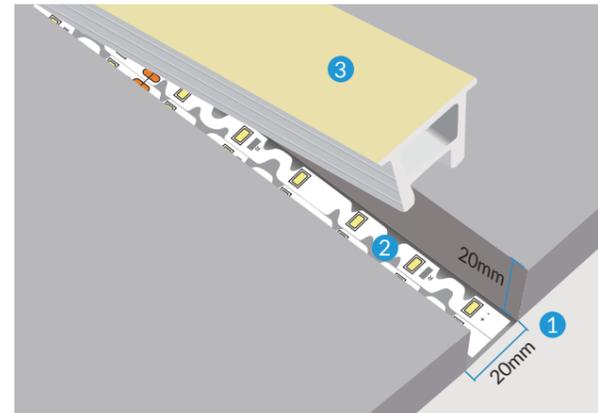



- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more


NC3020



- Product size: 30*20mm
- PCB width: 10-20mm
- Material: Silicone
- Length: 100M/reel, Customized
- Support OEM & ODM
- Dotless and beautiful lighting
- Suitable for diverse scenarios and creative designs.
- Resistant to weather, corrosion, and UV exposure.
- Meets international standards for safety and reliability.

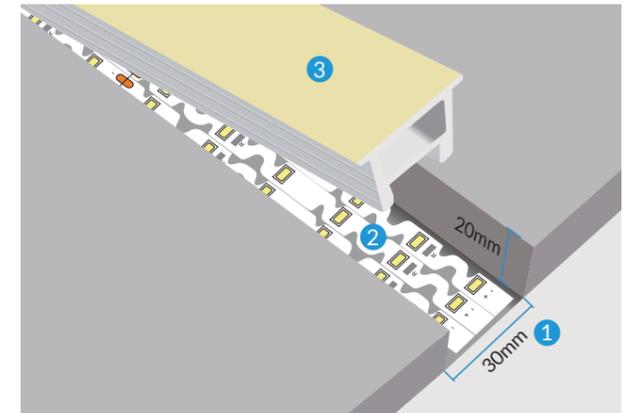

- 1 Slot according to the size, the error should be small
- 2 Tear off double-sided tape at back and stick the light strip to the wall
- 3 Press the cover into the wall. When the light is turned on, the cover has high light transmittance and high temperature resistance. The light strip and the cover are installed separately, which makes the DIY operation space more

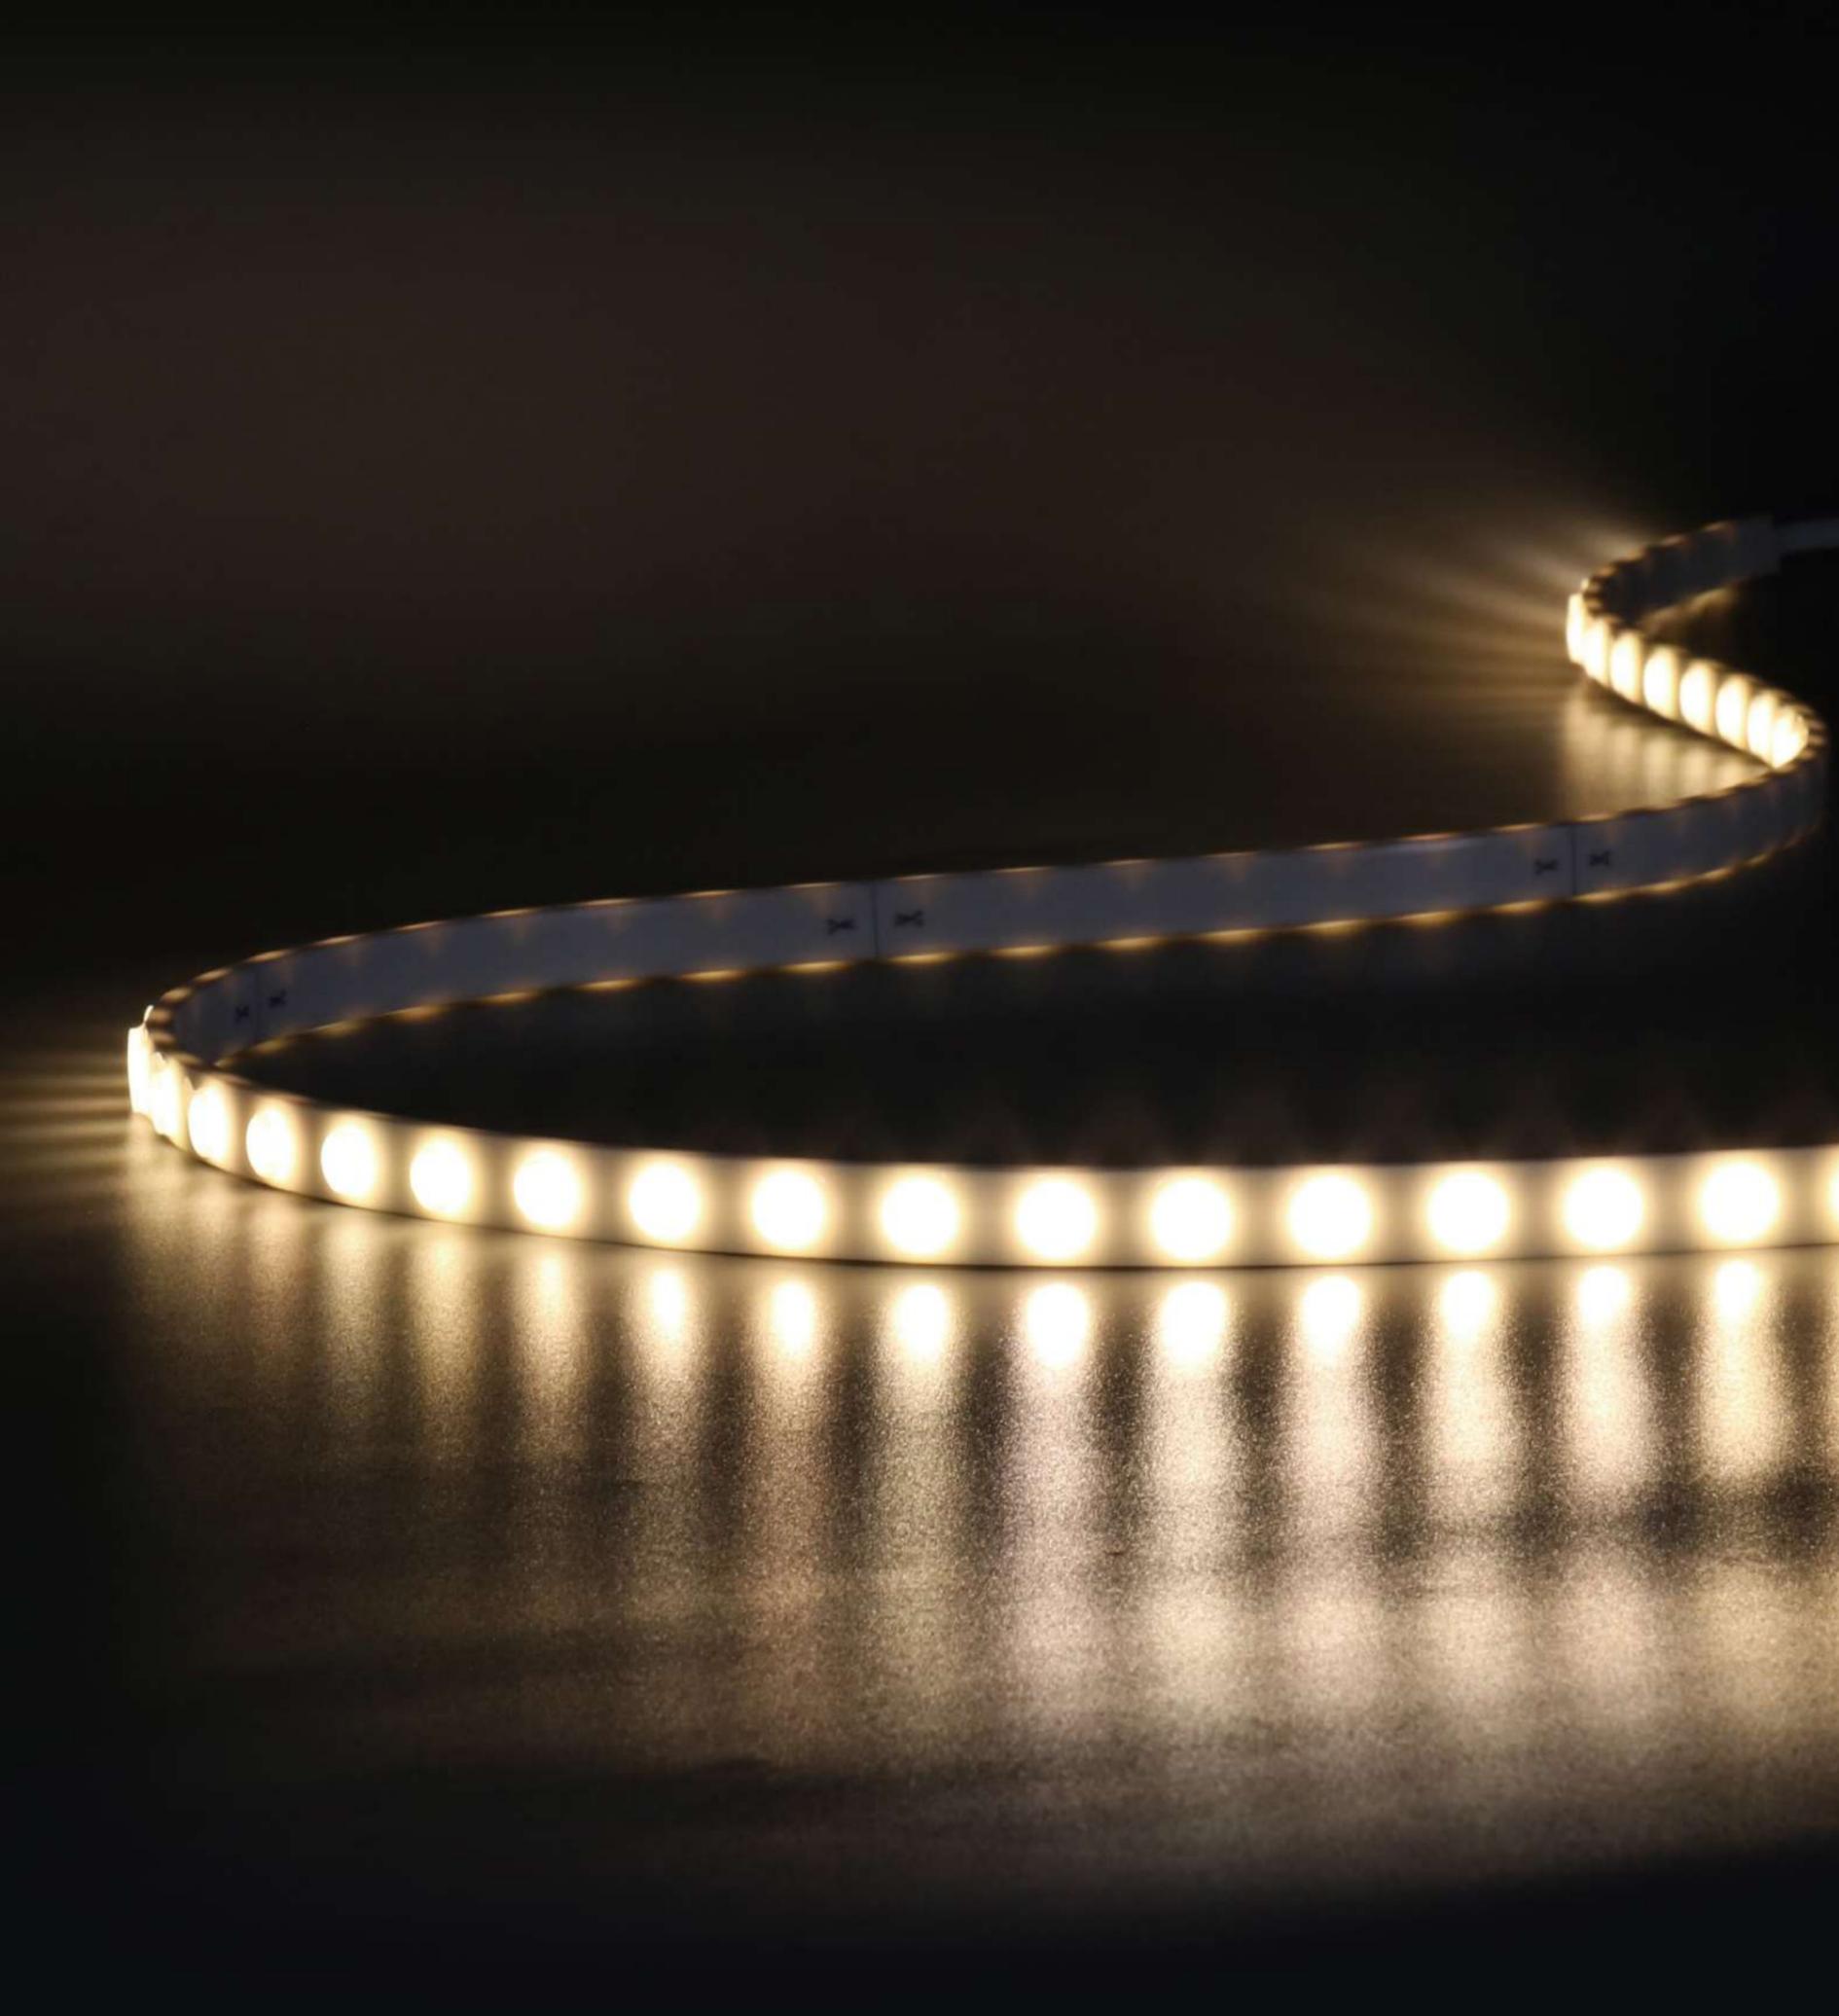

SST Flexible Wall Washing Lamp



SST1007B-W






IP65 24V 5M REEL

- Available in 24VDC maximum.
- Viewing Angle: 30°.
- Very bright & low power consumption.
- Operating temperature: -20°C to 50°C.
- Long life span LED lights 50,000 hours+.
- Adhesive back, peel & stick.
- Dimming by controller or sensor switch.
- The maximum run length from one end is 5m.
- IP65 waterproof design structure.
- Applications: Building facades, landscape, indoor accent, commercial lighting


Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	LED Qty/M	Voltage	Power/M
WHT	2200 K	860	7LED/125mm	125	24V	14.4W
	2700 K	1190				
	3000 K	1260				
	3500 K	1280				
	4000 K	1344				
	5000 K	1288				
	6500 K	1260				

Recommended Accessories

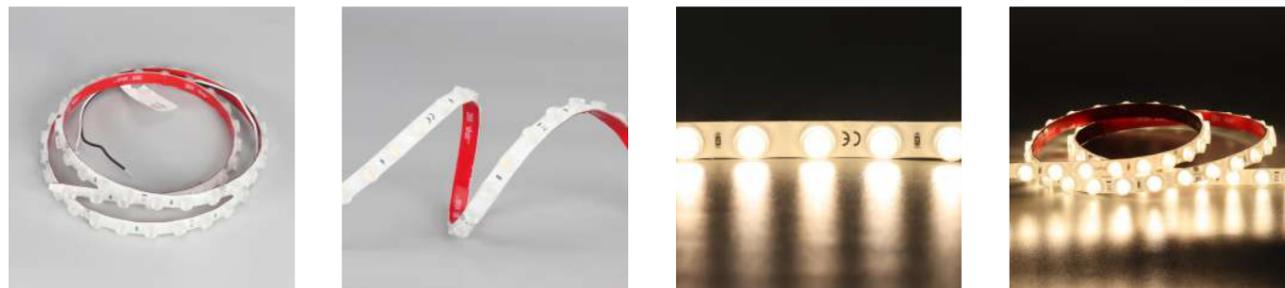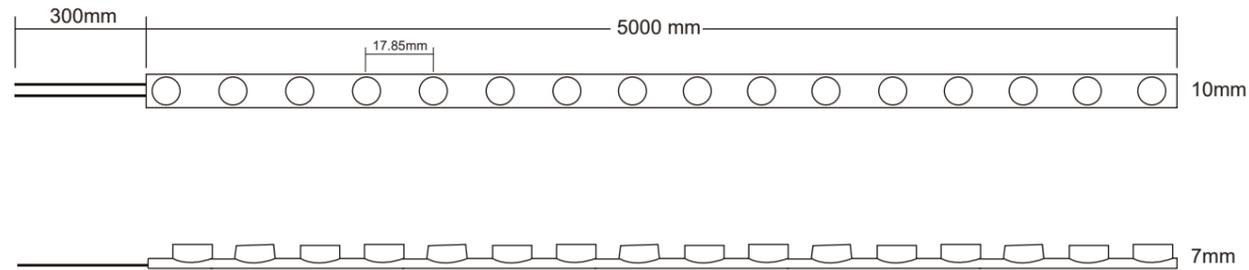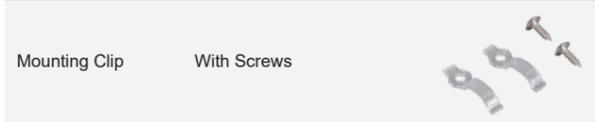

SST1208C-W

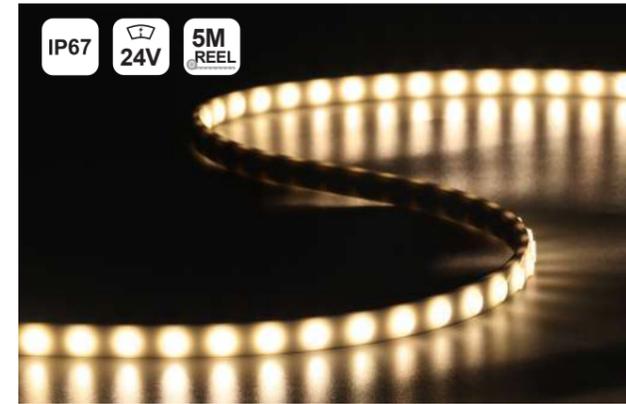



IP67 24V 5M REEL

- Available in 24VDC maximum.
- Viewing Angle: 30°.
- Very bright & low power consumption.
- Operating temperature: -20°C to 50°C.
- Long life span LED lights 50,000 hours+.
- Adhesive back, peel & stick.
- Dimming by controller or sensor switch.
- The maximum run length from one end is 5m.
- IP67 waterproof design structure.
- Applications: Building facades, landscape, indoor accent, commercial lighting

Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	LED Qty/M	Voltage	Power/M
WHT	2200 K	1036	7LED/125mm	125	24V	14.4W
	2700 K	1190				
	3000 K	1260				
	4000 K	1468				
	5000 K	1368				
	6500 K	1267				

Recommended Accessories

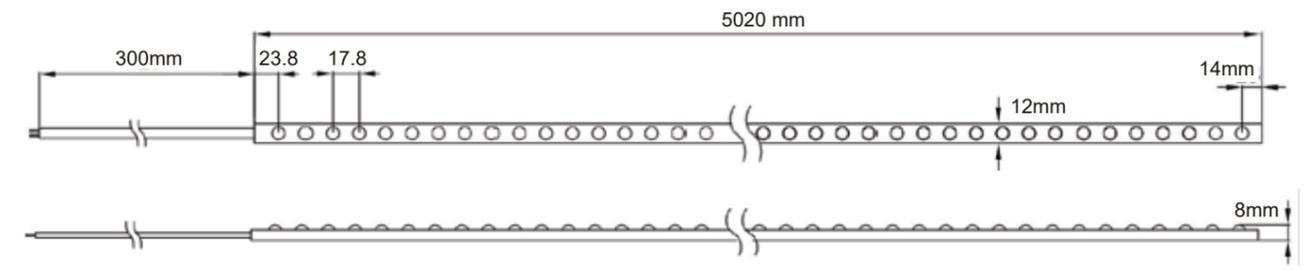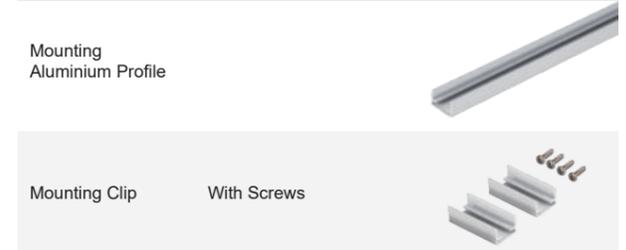

SST2010A-W



IP67 24V 5M REEL

- Available in 24VDC maximum.
- Viewing Angle: 15°, 30°, 45°, 60°, 25x45°, 25x45x10°.
- Very bright & low power consumption.
- Operating temperature: -20°C to 50°C.
- Long life span LED lights 50,000 hours+.
- Adhesive back, peel & stick.
- Dimming by controller or sensor switch.
- The maximum run length from one end is 5m.
- IP67 waterproof design structure.
- Applications: Building facades, landscape, indoor accent, commercial lighting

Recommend LED strip parameters

Series	CCT	LM/m CRI 90	Unit cut	LED Qty/M	Voltage	Power/M
WHT	2200 K	1680	3LED/62.5mm	48	24V	24W
	2700 K	2160				
	3000 K	2304				
	4000 K	2352				
	5000 K	2400				

Recommended Accessories

Mounting
Aluminium Profile



Mounting Clip
With Screws

