

Soft Magnetic Track

Features

- Surface mounting on iron materials only.
- Track: 10A max, DC12-36V .
- Connector: 3A max 20AWG 2468 Parallel Wire
- Color: Black, white, customized color are available.



Accessories:



FTR01

Track




FTR02

20AWG 2468 Parallel Wire
Length and Color can be customized.



FTR03

16AWG 2468 Parallel Wire
Length and Color can be customized.



FTR04

Color can be customized.




LCM01


Line clamping magnet
18-24AWG, 2468 parallel lane

Size:


FTR01

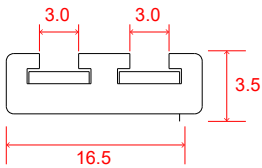


FTR02

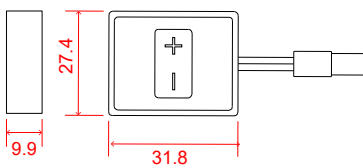

FTR03

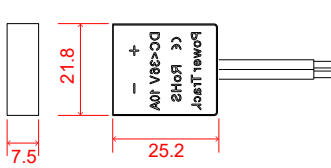


FTR04

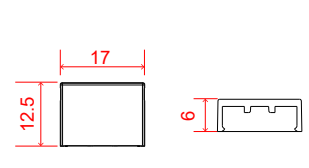


Connection Diagram:




Step 1
Connect the FTR03 and FTR04 to the FTR01

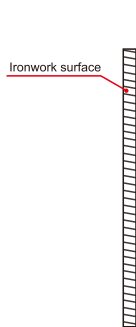

Step 2
Installed FTR01 on iron materials

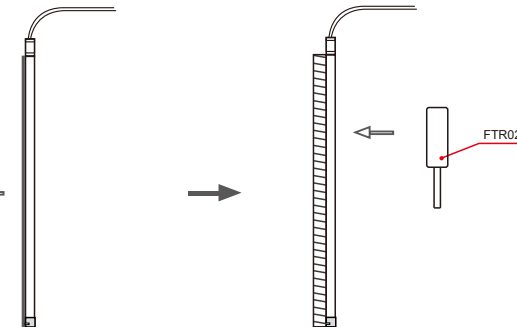

Step 3
Install the FTR02 straight to the FTR01 and FTR02 can be used with iron material only.

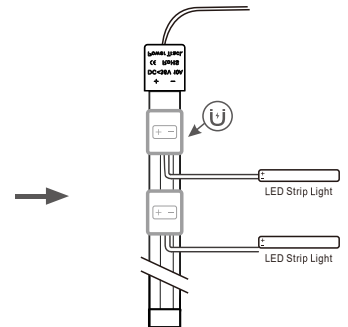

Step 4
Install successful