



Free Cut Linear Lighting Series: FC-A1410

Seamless connection | detachable connection

Product specification

Lister: _____

Assessor: _____


Approver: _____

Specification

Model	Voltage	Watt	Lumen	CRI	Color Temperature	Model of LED Beads	Length (including endcaps)	Package
A1410 -1000	12VDC	9.6W/M	510	>80	3000K/ 4000K/ 6500K	2216	1004mm	A light bar. one end caps. Two mounting clips. A power connector (wire length 2m). Frosted PC Cover.
			535					
			525					
A1410-1000	24VDC	9.6W/M	510					
			535					
			525					

Accessories

length can be customized



2m connecting wire




Product Features

- The LED Light is easy to install to wardrobe or shelf with mounting clip accessories. New design with separation of light bar and power wire, easy to install, remove and replace. With modern design, it is suitable for cabinet / furniture / room / ceiling hanging lighting etc. Substantial aluminum mass provide good heat sink for high power leds. It's perfect for seamless connection, no dark space.



Structure & Spec.

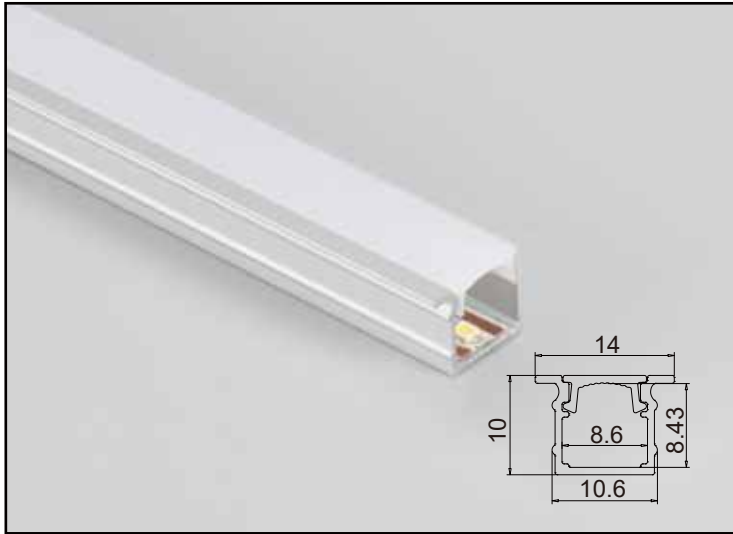


Model	FC-A1410
Size (mm)	14*10.6
Material	6063 T5 Aluminum Alloy
Finish	Aluminum Anodized
Color	Sliver/White/Black
Lighting direction	Front luminous
Installation	Recessed Mounting
Color Temperature	3000K/ 4000K/ 6500K
Voltage	12V/24V
Power(W/PC)	9.6W/M
Power output contact	SlingShot Contact
CRI (RA)	>80

How to install


1. Horizontal installation

2. vertical installation

The slotting dimension is 11mm wide and the depth is 10 mm

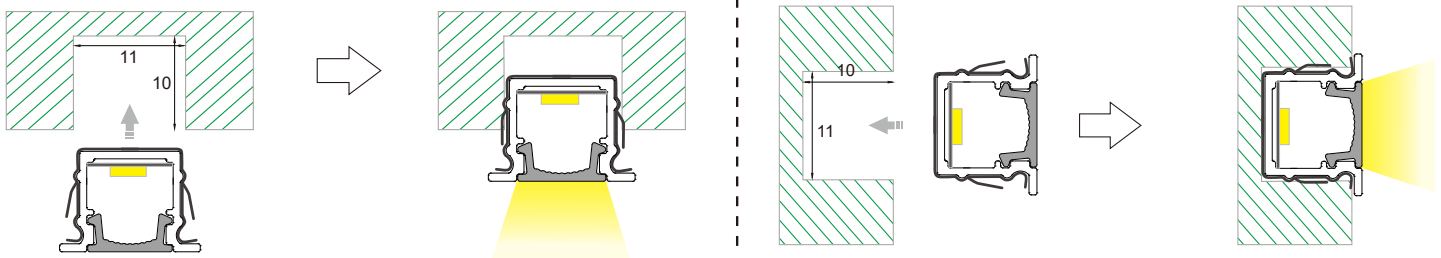


relative intensity

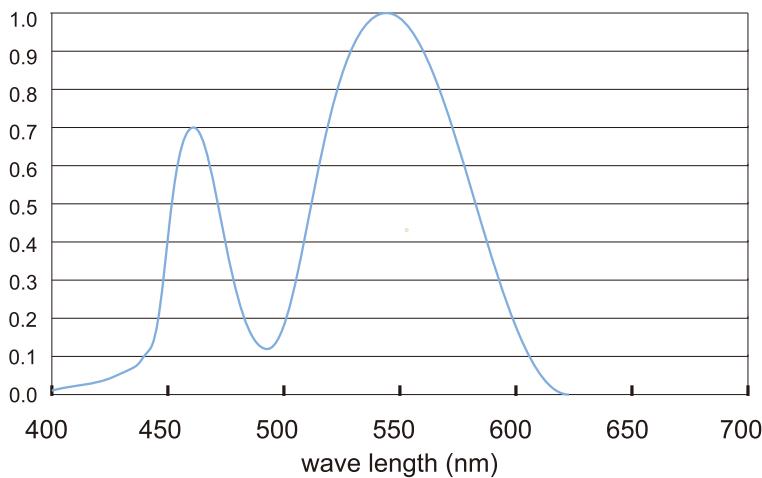

for: white LED

Radiation diagram

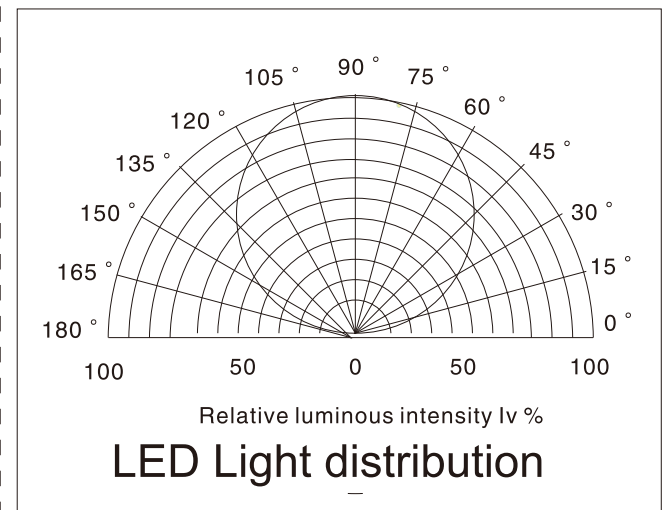

Recommended model of LED cabinet light power supply

SUR-12024-CP

DC Voltage: 12VDC


Rated Current: 2A

Rated Power: 24W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 4 outlets for 12vdc led light, and 1 outlet for sensor switch.

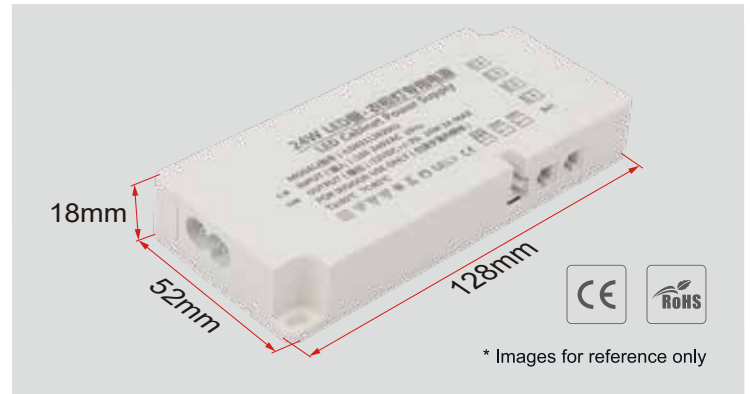

SUR-12036-CP

DC Voltage: 12VDC


Rated Current: 3A

Rated Power: 36W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 6 outlets for 12vdc led light, and 1 outlet for sensor switch.

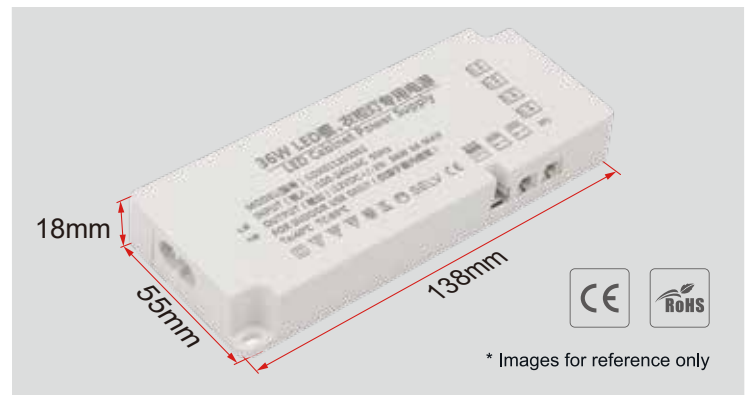

SUR-12060-CP

DC Voltage: 12VDC


Rated Current: 5A

Rated Power: 60W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 7 outlets for 12vdc led light, and 1 outlet for sensor switch.

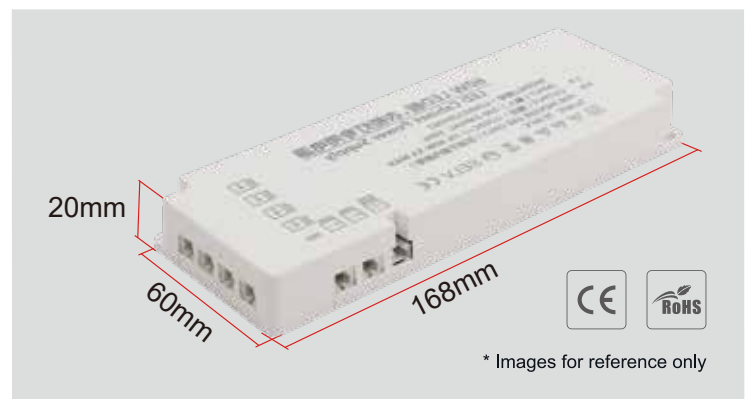

SUR-24024-CP-D

DC Voltage: 24VDC

Rated Current: 1A

Rated Power: 24W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 4 outlets for 24vdc led light, and 1 outlet for sensor switch.



SUR-24036-CP

DC Voltage: 24VDC


Rated Current: 1.5A

Rated Power: 36W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 6 outlets for 24vdc led light, and 1 outlet for sensor switch.

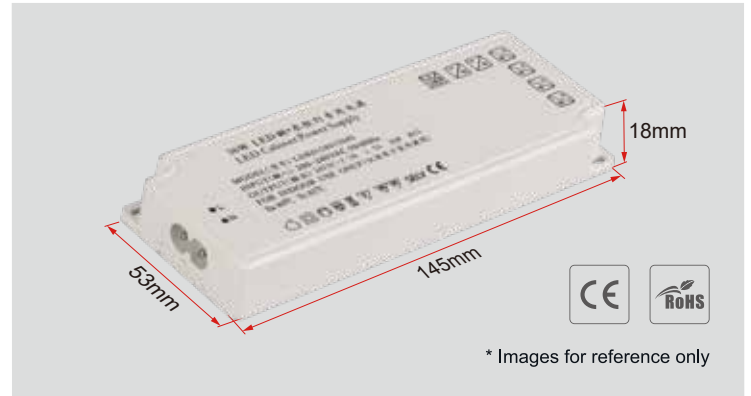

SUR-24060-CP-D

DC Voltage: 24VDC

Rated Current: 2.5A

Rated Power: 60W max

Voltage Range: 100-240VAC

Frequency Rang: 50-60HZ

This Power supply is with 7 outlets for 24vdc led light, and 1 outlet for sensor switch.



installation procedure

